

# AC612 XUF


**Product ref: AC612 XUF, AC612 XUFX**

DMX controllers with 5 memories and faders

The AC612 range of controls provides simple DMX scene capture and recall functions.

AC612 XUF is a 5-memory fader playback panel with terminal connections.

AC612 XUFX has the same functionality but has XLR connections for DMX, a USB connection for firmware upgrades and programming plus a universal USB power supply.

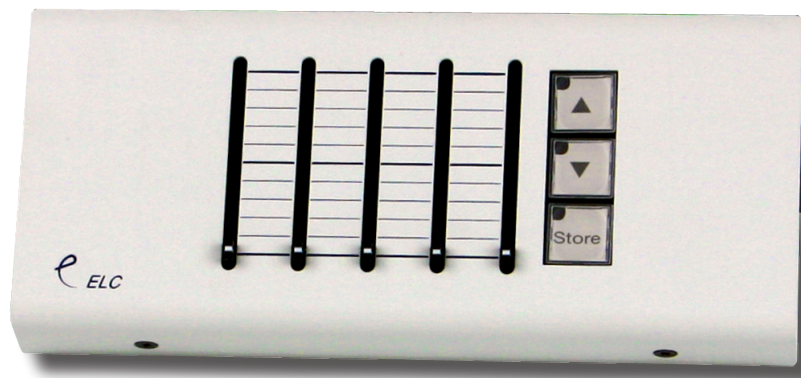

Dimensions	180 x 80 x 23mm, 450g [box size: 260 x 160 x 30mm, 500g gross]
Power	AC612 XUF, AC612 XUBF: External power supply, 9-24Vdc, 200mA. AC612 XUFX: universal USB power supply 9-24Vdc, 200mA
Connections	AC612 XUF: DMX terminals. USB port. AC612 XUFX: DMX-in: 5-pin XLR (M). DMX-out: 5-pin XLR (F). USB port.
Controls	Memory/chase faders 1-5, master up/down and store
Options	AC612 Editor software (free download from <a href="http://www.elclighting.com">www.elclighting.com</a> )
Supplied	AC612 XUF: Control unit and operator leaflet AC612 XUBX: As above, plus universal USB power supply 9-24Vdc, 200mA
Versions	AC612 XUF: DMX sequence player with 5 faders and USB port AC612 XUFX: DMX sequence player with 5 faders, USB port, XLR5 DMX connections, universal USB power supply
Related products	AC612 XUB: DMX sequence player with 12 push buttons. AC612 XUBF: DMX sequence player with 3 faders, 6 keys, terminal connections, USB port. AC612 DIN: DMX sequence player in DIN case SideKick too: 30 memory storage with 30 recall buttons and 10 faders

## Features include:

- 5 memories of 512 DMX channels
- Each memory can be a scene or a chase (total capacity 126 steps)
- Stores chaser step length and times
- Master up/down fade keys
- Editor software