



SIXTY82™



The Innovators

The New Original

Give people the tools, and they will build incredible stuff.

That is what it is about, and what it has always been about. We started this journey way back in 1982, creating the world's first modular aluminium trussing system. That invention, and everything that has followed, has been driven by

recognising the needs and demands of a fledgling industry that has since become a global phenomenon – the live events. For us, this means facilitating the build and rebuild of literally thousands of structures every year, and the according

stories of excitement, emotion and joy that are so fundamentally human. So for us that defines it, the need to innovate, to enable and ultimately to continue working towards our end goal: to help you build incredible stuff.

Some history. And the future.

Our founding shareholders all share a connection, back in the early days of the phenomenon that is aluminium trussing. Pioneers and visionaries, together responsible for countless innovations that have framed the landscape of today's marketplace. A casual discussion in Leeds, UK, brought together a few of those bright minds, separated by the passing of time. They started with a simple question – how would we do this

better? Cappuccino's were consumed, and some thoughts were sparked, with the kind of spark that is hard to extinguish. A simple conclusion; what was missing, was passion, and simplicity of purpose that comes with that. Oh, and the right team, a combination of all the experience and lessons learned, with young, dynamic people to drive the future forward. And so the formula for SIXTY82 was discovered...

Bringing together over 100 years of entertainment industry leadership of our shareholders, the company is a British, Dutch and French alliance designed specifically to bring a fresh view in to the market. Headquartered in Drachten, Netherlands, SIXTY82 has every component required to change the way that lightweight structural systems are used. All over again.

Simplicity. By definition, in purchase, in use and in support.

By Definition. In order to do great work, tools need to be a facilitator, not a distraction. They need to work intuitively, be easy to understand yet far reaching in their capability. We call this wide platform modular engineering; behind that we have the strongest technical team in the industry. Their aim is to rationalise products by improving them; reducing inventory, save time and diminish the carbon footprint.

In Purchase. This means that we will have a razor sharp catalogue that is capable of supporting every build:

nothing else. In turn, the experience and knowledge of our dedicated SIXTY82 sales centres will work to ensure rapid availability of every component. We fully understand that non delivery could mean no show.

In Use. With form following function and a restless drive to reduce waste, excess and complexity, our products will be better to work with. From our improved load performance and high production accuracy to the world-first RFID integration. We are producing products that are both easier and more reliable

in use. This leaves room for imagination and creativity and ensures that your end result will be better than ever before.

In Support. We have learnt over the years that our products can only perform with the right level of support. To that end, we have the strongest technical team in the industry, who are here for you if you need any help, from the start of the project to the very end. They are inspired by working every day to ensure that our partners push the boundaries to do incredible things.

Technical Innovation

Technical innovation is at the heart of what we do. This year, we are delighted to launch with a number of world firsts in the trussing and staging industry. Our commitment is to support our technical team deliver innovations and new product launches every season – all designed into a modular roadmap to allow you to efficiently scale your investment – and build incredible things.

RFID Ready

Together with our partners we have combined multiple new technologies into a borderless product management platform. Our RFID system will allow seamless tracking of products, both physically and in terms of technical and origination data. This will give you the confidence that you are using the right products in the right way, every single time.



TÜV Approved

SIXTY82 is employing some leading figures in the field of temporary demountable structures. These people have been involved since the beginning of this century in developing standards in Europe. Accordingly, all of our products are calculated, independently approved and assessed to the latest standards.

Furthermore, as the technical pioneer

of many industry leading technologies, SIXTY82 designs its products with integration in mind. This means that technically challenging constructions can be achieved with the same simplicity and peace of mind as the use of individual products.



Clear technical information, available anywhere

With the SIXTY82 app, and our roadmap for RFID integration, we will provide a single support platform which will guide you through the use of our products. This means that you can easily retrieve load, construction and compliance information wherever you are, in a

simple and intuitive way. The platform will continuously be updated with new innovated functionalities such as our SIXTYView and the 3D visualiser, as we develop new technologies driven by our users.

Platform Simplicity

Our promise. Every product will provide solid, reliable service with a simplicity of application. You will get great advice and find a clearer and more focused product range. This means that you will need less different parts in order to achieve more; saving time, space and costs.

Product Personality

General information and address	Article Description	Weight of the article in kilograms
<p>DESIGNED AND MANUFACTURED IN THE EU. USE WITHIN THE LIMITS OF THE STRUCTURAL REPORT AND INTENDED USE WWW.SIXTY82.NL</p> 	M29S+L200 Square 200cm Item: 128008 ID: B24102022071	 12,34 
<p>Manual: can be obtained on www.SIXTY82.nl, in brochure or via QR code</p>	B 22 01 2023 001 location day month year running number (daily reset)	 TUV logo in relation to product approval or EN1090

In this environment, it is vital that you know both the origin and the capabilities of every product that you work with. However, product specifications, traceability and user data have long been a cumbersome for companies and individuals working in this industry. Until now. We believe that simple,

accurate information is a cornerstone of safe building. Accordingly we are proud to launch a suite of tools which centralise data and facilitate easy reference, either physically or digitally, at all times. Our Product Personality system, gives a unique identification to every product and links data about its


specific manufacturing process, and TUV certifications. This is unified by an online database of component information and user manuals, and tied to each individual SIXTYTag. Meaning you have multiple ways to get all of the up to date information of the product and its use, anywhere and any time.

SIXTYTag

The functionality of our Product Personality system is further enhanced with the SIXTYTag – which is standard on every section of trussing that we produce. This unique development of RFID technology combines a special tag with specific


extrusion and mounting design. As a result it is optimised to maximise reading accuracy. It is used within SIXTY82 for the management of stock and designed to facilitate open integration with other systems, enabling the growth of digital asset tracking. We have a roadmap for the development of this unique technology with enhanced functionalities such as EN inspection management and global stock with real-time availability.



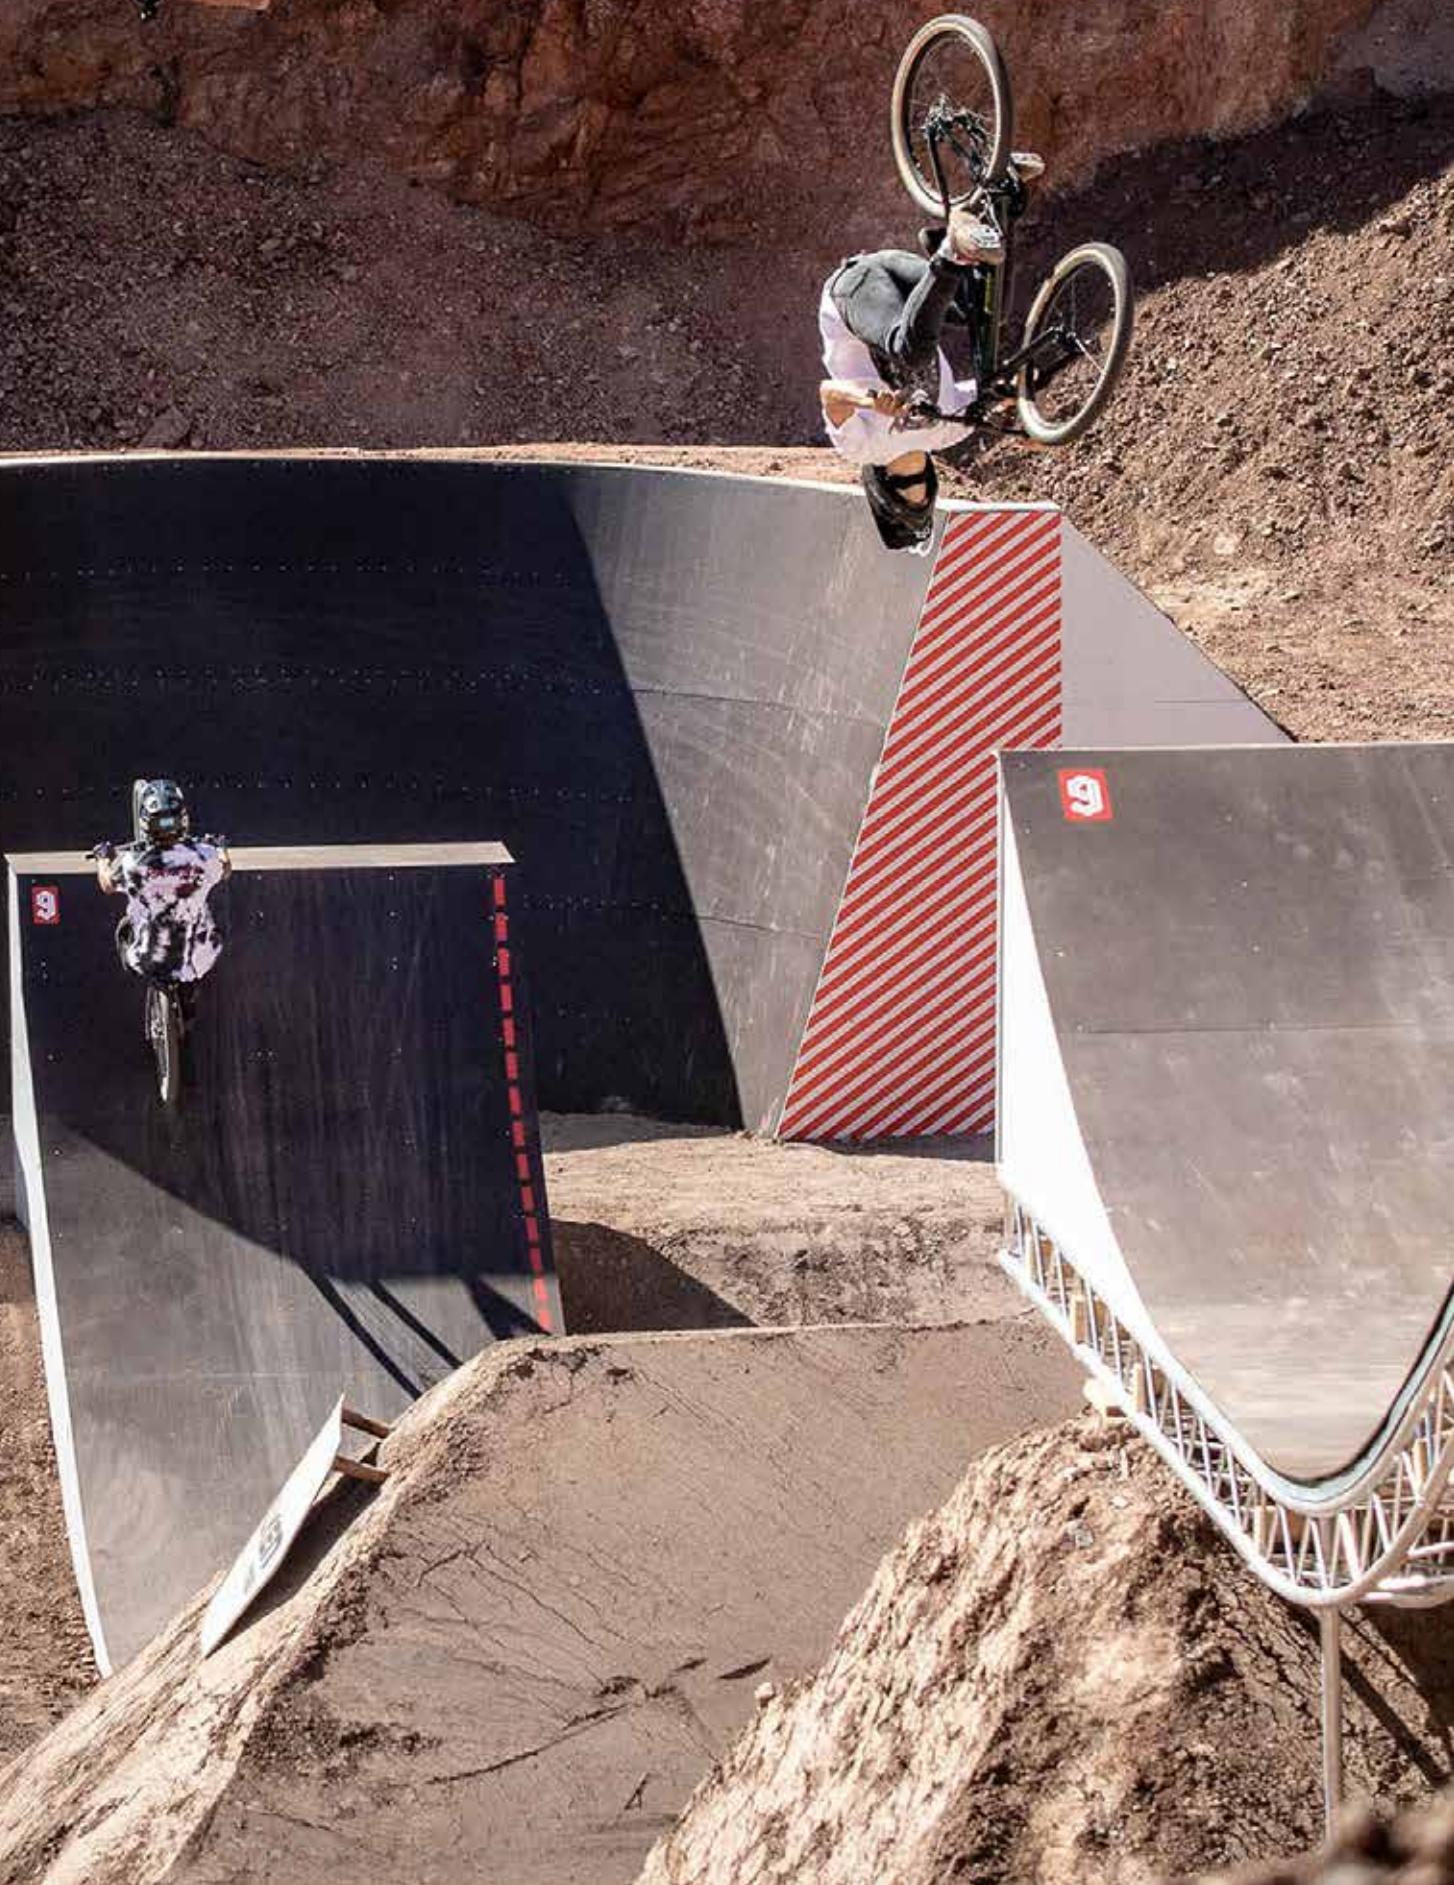

Content

serie M	TPM	7
serie M	M39	29
serie L	L52	41
serie XL	XL101	47
	Towers	59
	Roof Systems	71
	LED Screen Supports	89
	Stage Modules	95
	Dollies and Extras	117
	Data Center	128
	Sales Network	130

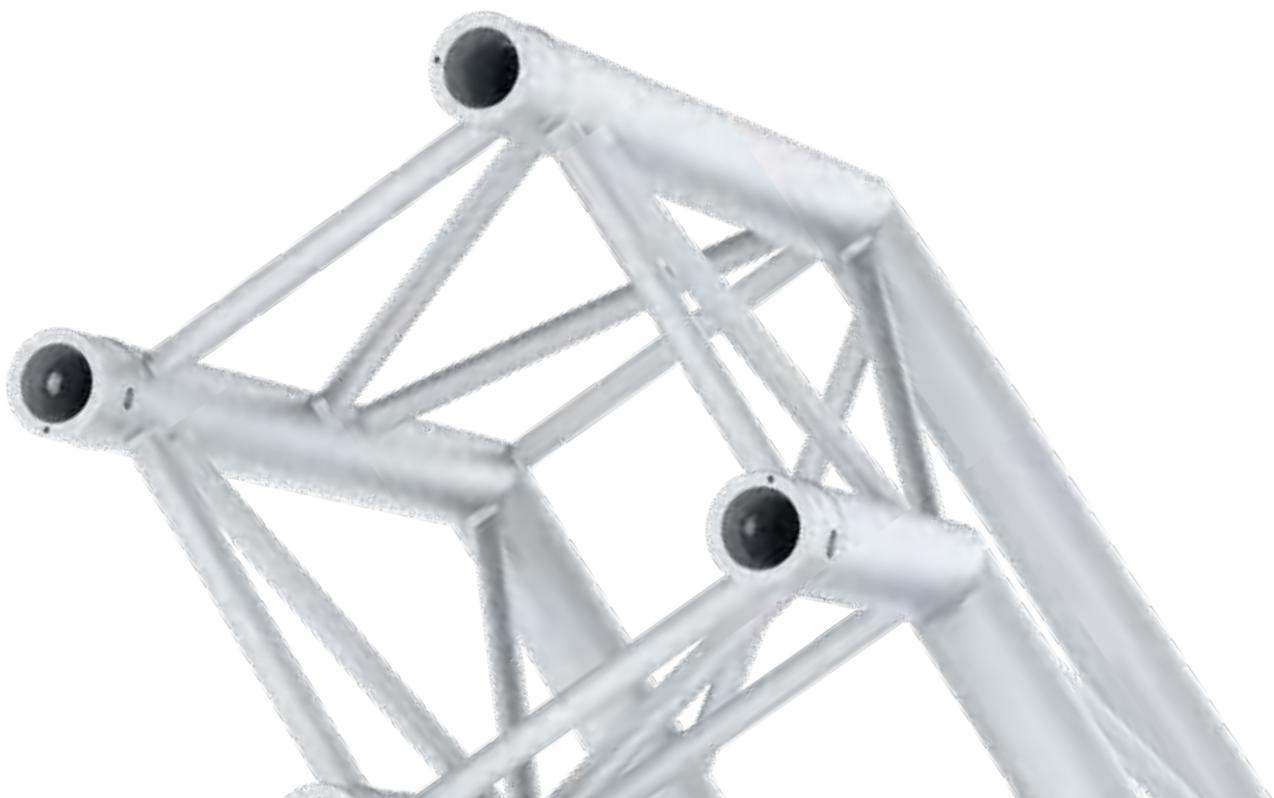






TPM

TRUSS SERIES

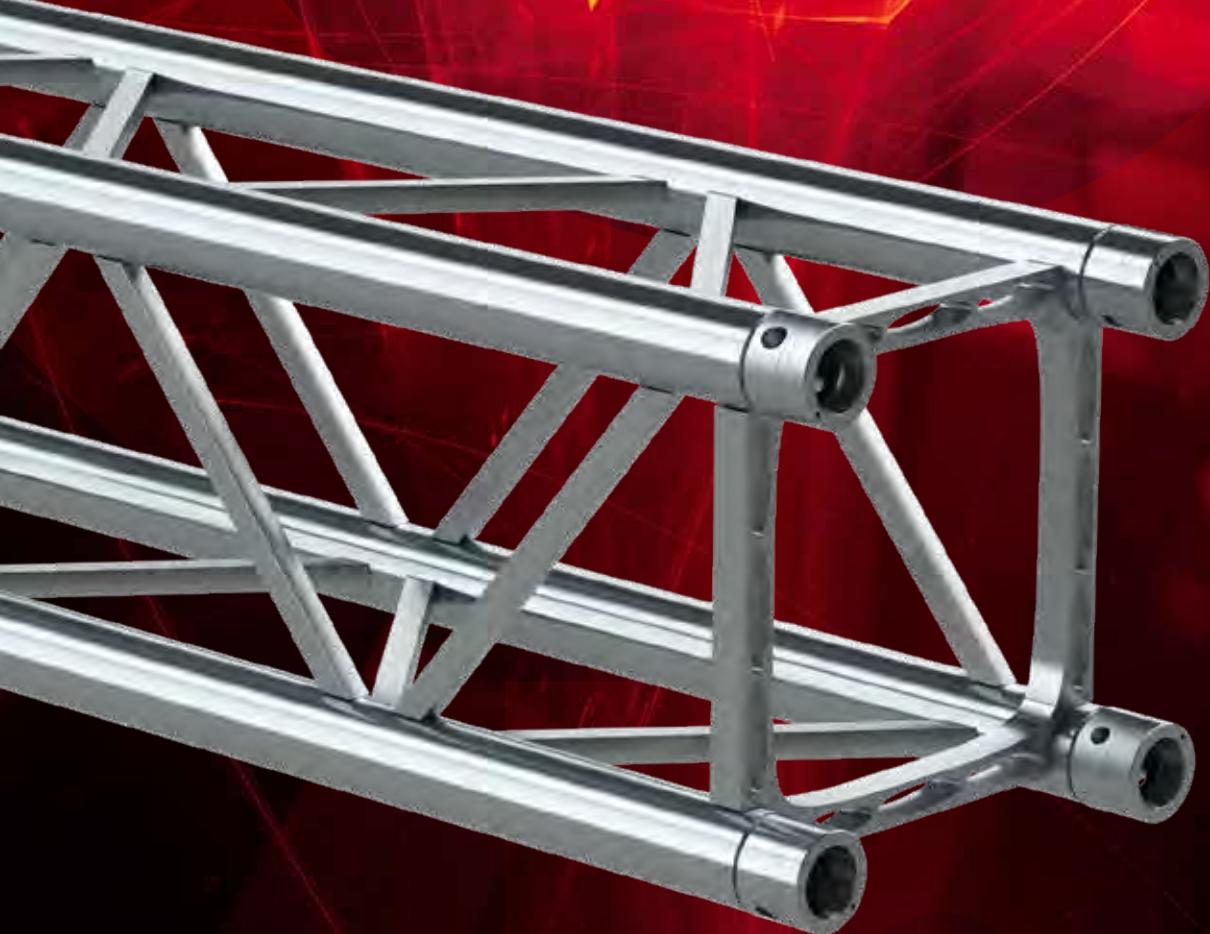

WORLDWIDE PATENT

WE
MADE
FROM
ONE
PIECE

A REVOLUTIONARY DESIGN

Introducing the **TPM Truss Series by SIXTY82** – the most revolutionary aluminum truss on the market!

Our team at **SIXTY82** has spent countless hours researching and developing the perfect aluminum truss, and we are thrilled to finally unveil the TPM Truss Series.


What sets our truss apart from all others is its strength.

We've designed it to be up to 25% stronger, ensuring that your structures will be able to withstand even the most demanding conditions.

And our truss is more than just strong – it's also versatile. It can be used for a wide range of applications, from small events and exhibitions to large-scale concerts and festivals. And with its sleek, modern design, it will add a touch of sophistication to any setting.

Don't just take our word for it – try the TPM Truss Series for yourself and experience the difference.

We're confident that once you do, you'll never go back to using any other truss.

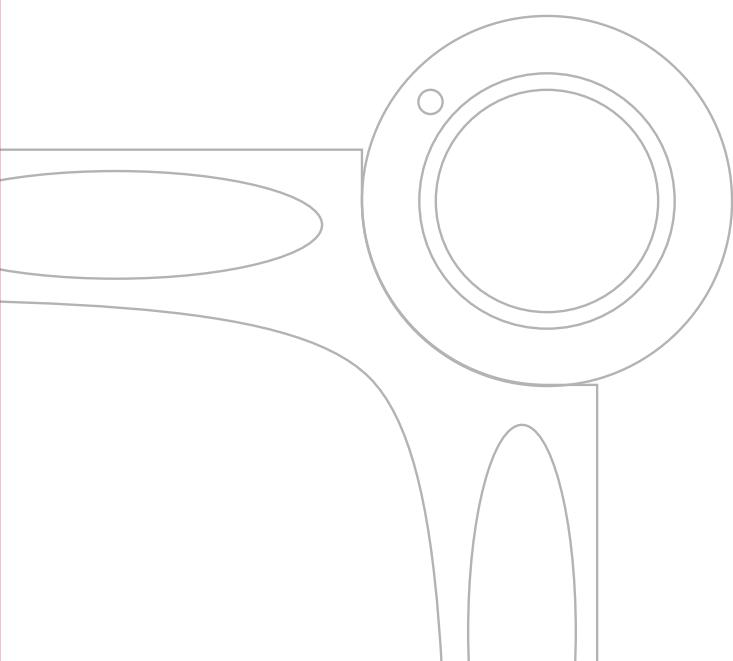

UP TO 25% STRONGER
BOUNCE AND SMASH PROOF
PERFECT FIT
100% INTERCHANGEABLE
EASY TO PLACE LIGHTING FIXTURES
BECAUSE OF END FRAMES



REDESIGNING

THE STANDARD

At Sixty82 we have set our self the challenge to re-invent the most used truss type, the M29 Series. The goal was to create an evolution on the standard truss, with beneficial properties over the current M29 Series, while remaining fully interchangeable with the current series.

To achieve these unique properties, we have put countless hours in researching the best solutions. There have been two main innovations to achieve the improved properties.



1

Re-designed diagonal braces

The improved design of the diagonal braces helps to increase the strength and stability of the truss system. By optimizing the shape and dimensions, the diagonal braces are able to provide better support and withstand higher forces. This helps to improve the overall strength and performance of the truss, making it more effective at supporting heavy loads.

2

Extruded end frame

The use of the extruded end frame contributes to the improved strength and performance of the truss system. By using extruded end frames, the TPM Truss is able to withstand more load without deforming or failing.

In addition to the improved strength, the TPM Truss Series is 100% square and has a perfect fit. This is because the extruded end frames are more precise and uniform in shape, which allows them to more easily and securely attach to other truss components. This can help to improve the stability and strength of the overall truss system, and reduce the risk of failure due to poor connections.

Finally, the removal of the end diagonal allows the inside of the truss to be used for storage and makes it very easy to place uplighters in the truss without the end diagonals interfering.





ROBOTIC PRECISION


But It's more than just robotizing

At our company, we have gone above and beyond to optimize the production of our TPM truss. Instead of simply robotizing the existing design, as many others do, we have taken a holistic approach to improving our production process. We have not only implemented advanced robotics technology, but we have also adapted the design of the truss to fit the robotized production process as perfectly as possible.

This unique approach has allowed us to achieve maximum output and produce a top-quality product. Our commitment to innovation and optimization has helped us offer some of the shortest lead times in the market, making us a reliable and efficient choice for our customers.

We have a team of highly skilled professionals in-house who have the knowledge and expertise to design and maintain both the truss and the robot installation, ensuring that we are always producing the best possible product.

MAXIMUM OUTPUT
AND PRODUCE A
TOP-QUALITY
PRODUCT

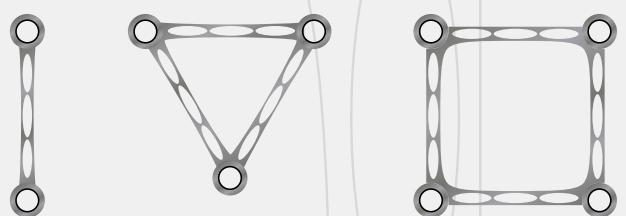

TPM Spigot

An additional key improvement we have made to our TPM truss system is the change in alloy for the truss spigots. By switching to a stronger alloy, we have been able to increase the strength of the truss.

The new spigot is easily distinguishable from the old spigot because of the changed recessed identification line. These new spigots, along with other

optimizations in our production process, have allowed us to offer a product that is up to 25% stronger and more reliable than ever before.



202058 Spigot Model TPM03
202059 Spigot TPM04 M8 Thread

INTERCHANGEABLE



With 100% backwards interchangeability, the TPM truss can be seamlessly integrated into any M29 series setup without any problems. In cases where both truss types are used, customers can simply use the loading tables of the M29 truss for safe and reliable operation.

This backwards interchangeability means that our customers can enjoy all the benefits of the new TPM truss without having to worry about compatibility issues. It's the perfect solution for anyone looking to expand their M29 series and take advantage of the latest innovations in truss technology.

**SEAMLESSLY
INTEGRATED INTO
ANY M29 SERIES**

TPM29L Length Ladder

48.3 x 3 mm

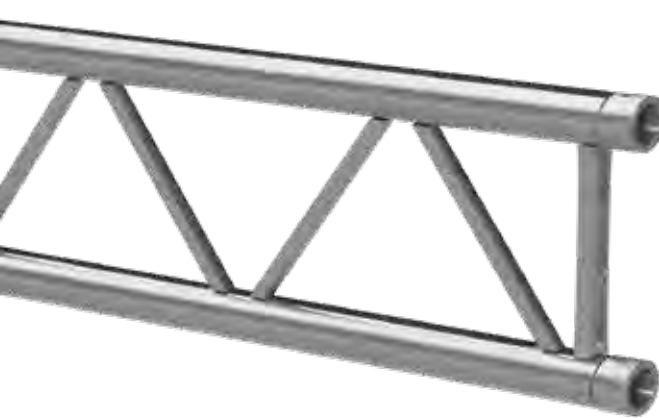

2.8 kg/m



M

ALU/BLACK

(RFID)
READY



P.128

Ladder - TPM29L

Code	Length
121501	21 cm
121502	25 cm
121503	50 cm
121514	60 cm
121504	71 cm
121515	75 cm
121505	100 cm
121506	150 cm
121507	200 cm
121508	250 cm
121509	300 cm
121511	400 cm
121513	500 cm

Load table single span, supported sideways every 1 meter at top chord TPM29L

Span m	CPL kg	Deflection mm	2 x load kg	Deflection mm	3 x load kg	Deflection mm	4 x load kg	Deflection mm	UDL kg/m	Deflection mm
2.0	976.5	4	488.3	5	325.5	4	244.1	5	488.3	5
3.0	779.0	8	486.9	10	324.6	10	243.5	10	324.6	10
4.0	625.0	15	422.3	19	323.7	17	242.8	19	242.8	18
5.0	520.9	23	357.8	29	286.7	27	223.8	29	193.7	28
6.0	445.7	33	309.8	42	241.9	39	190.6	42	161.0	41
8.0	343.8	58	243.0	74	183.1	69	146.2	74	96.0	73
10.0	277.6	91	198.5	116	146.2	108	117.6	116	60.9	114
11.0	252.3	110	181.3	140	132.3	131	106.8	140	50.0	137
12.0	230.7	131	166.5	167	120.5	155	97.5	167	41.7	164

Load table single span, supported sideways every 2 meter at top chord TPM29L

Span m	CPL kg	Deflection mm	2 x load kg	Deflection mm	3 x load kg	Deflection mm	4 x load kg	Deflection mm	UDL kg/m	Deflection mm
2.0	389.0	1	291.8	1	194.5	1	162.1	1	389.0	1
3.0	257.1	2	192.8	3	128.5	2	107.1	3	171.4	2
4.0	190.5	4	142.8	5	95.2	4	79.4	5	95.2	4
5.0	149.9	6	112.4	7	75.0	7	62.5	7	60.0	7
6.0	122.5	8	91.9	10	61.2	9	51.0	10	40.8	10
8.0	87.1	14	65.3	18	43.6	17	36.3	18	21.8	18
10.0	64.8	22	48.6	28	32.4	26	27.0	28	13.0	28
11.0	56.4	27	42.3	34	28.2	32	23.5	34	10.2	33
12.0	49.1	32	36.8	41	24.5	38	20.5	41	8.2	40

48.3 x 3 mm

TPM29L Length Ladder

Load table free span TPM29L

Span m	CPL kg	Deflection mm	2 x load kg	Deflection mm	3 x load kg	Deflection mm	4 x load kg	Deflection mm	UDL kg/m	Deflection mm
1.0	979.2	1	489.6	1	326.4	1	244.8	1	979.2	1
2.0	389.0	1	291.8	1	194.5	1	162.1	1	389.0	1
3.0	234.0	2	176.0	2	117.0	2	98.0	2	156.0	2
4.0	146.0	3	110.0	3	73.0	3	61.0	3	73.0	3
5.0	90.0	3	68.0	4	45.0	4	38.0	4	36.0	4

Find complete loading tables on SIXTY82.nl



All loading data is based on calculations per EN-1999-1-1 and the following assumptions:

- Static loads only.
- Spans supported or suspended at both ends.
- Triangle trusses solely used apex-up, apex-down.
- 2 chords truss to be placed upright, supported from top chord and loaded from bottom chord.
- Truss spans can be constructed of elements of different length.
- Interaction between bending moment and shear force considered.
- Self-weight of truss is already considered.
- Assembled truss systems need an individual structural calculation. Please contact SIXTY82 or a structural engineer.
- Read the manual before use.
- Higher loading can be allowed depending on the truss configuration.



TPM29T Length Triangle

48.3 x 3 mm

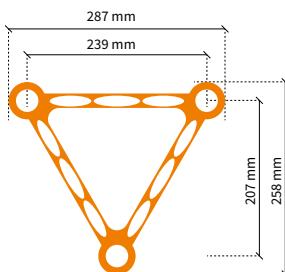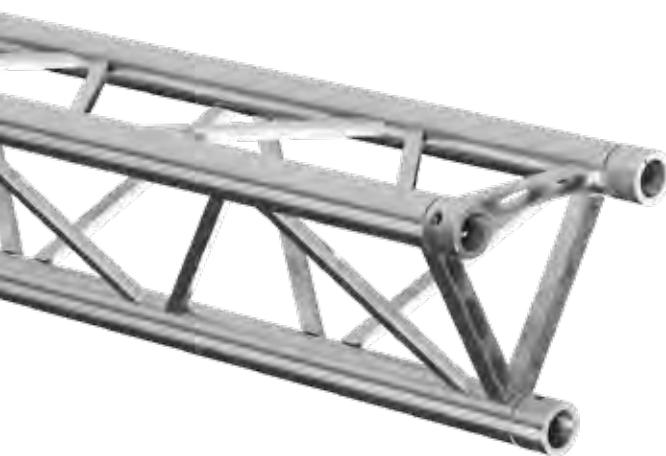

Triangle - TPM29T

Code	Length
125501	21 cm
125502	25 cm
125503	29 cm
125504	50 cm
125505	71 cm
125506	100 cm
125507	150 cm
125508	200 cm
125509	250 cm
125510	300 cm
125512	400 cm
125514	500 cm

Load table TPM29T

Span m	CPL kg	Deflection mm	2 x load kg	Deflection mm	3 x load kg	Deflection mm	4 x load kg	Deflection mm	UDL kg/m	Deflection mm
2.0	1620.2	3	1062.6	4	708.4	4	531.3	4	1062.6	4
4.0	802.0	12	601.5	16	401.0	15	334.2	16	401.0	15
6.0	525.7	28	394.3	36	262.8	33	219.0	36	175.2	35
8.0	384.8	49	288.6	63	192.4	59	160.3	63	96.2	62
10.0	298.1	77	223.6	99	149.1	92	124.2	99	59.6	97
12.0	238.5	111	178.9	142	119.3	132	99.4	142	39.8	139
14.0	194.4	151	145.8	193	97.2	180	81.0	193	27.8	189
16.0	160.0	198	120.0	253	80.0	235	66.7	253	20.0	247
20.0	108.6	309	81.4	395	54.3	367	45.2	395	10.9	386

Cantilever load

Span m	1 x Load kg	Deflection mm	UDL kg/m	Deflection mm
0.5	1066.7	0.1	2130.7	0.2
1.0	810.1	1.6	1062.6	01.5
1.5	537.8	5.2	706.6	05.1
2.0	401.0	12.4	401.0	09.3
2.5	318.4	24.1	254.7	14.5
3.0	262.8	41.5	175.2	20.9
3.5	222.8	65.4	127.3	28.5
4.0	192.4	96.7	96.2	37.3

Multiple supported span

Span m	CPL kg	Deflection mm	2 x load kg	Deflection mm	UDL kg/m	Deflection mm
2.0	1543.7	1	791.1	1	849.0	0.8
4.0	1072.2	7	602.1	7	401.0	6.3
6.0	702.8	16	394.6	15	175.2	14
8.0	514.4	28	288.9	26	96.2	24.4
10.0	398.6	42	223.8	39	59.6	36.9
12.0	318.9	59	179.1	54	39.8	51
14.0	259.9	76	146.0	69	27.8	66
16.0	213.9	93	120.1	85	20.0	81
20.0	145.1	123	81.5	113	10.9	124.7

Find complete loading tables on SIXTY82.nl



All loading data is based on calculations per EN-1999-1-1 and the following assumptions:

- Static loads only.
- Spans supported or suspended at both ends.
- Triangle trusses solely used apex-up, apex-down.
- 2 chords truss to be placed upright, supported from top chord and loaded from bottom chord.
- Truss spans can be constructed of elements of different length.

- Interaction between bending moment and shear force considered.
- Self-weight of truss is already considered.
- Assembled truss systems need an individual structural calculation. Please contact SIXTY82 or a structural engineer.
- Read the manual before use.
- Higher loading can be allowed depending on the truss configuration.

● 48.3 x 3 mm

TPM29S Length Square

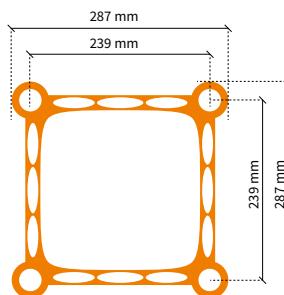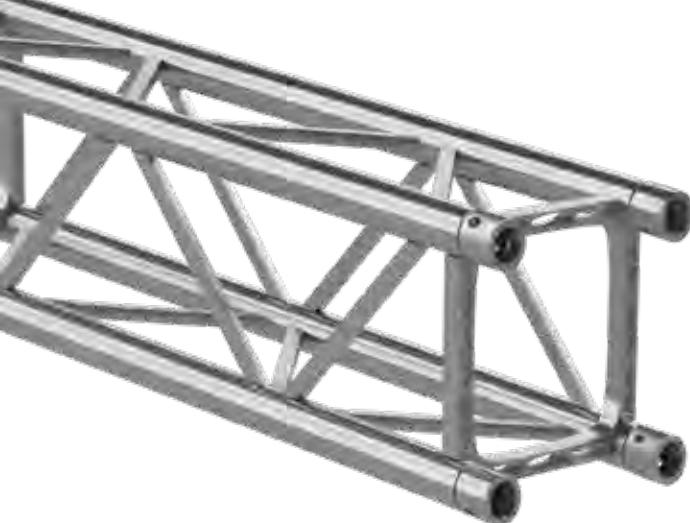

- 6.4 kg/m
- (RFID)
- M
- P.128
- ALU/BLACK

Square - TPM29S

Code	Length
128501	21 cm
128502	25 cm
128503	29 cm
128504	50 cm
128505	71 cm
128515	75 cm
128506	100 cm
128507	150 cm
128508	200 cm
128509	250 cm
128510	300 cm
128512	400 cm

Load table TPM29T

Span m	CPL kg	Deflection mm	2 x load		3 x load		4 x load		UDL kg/m		Deflection mm
			kg	mm	kg	mm	kg	mm	kg	mm	
2.0	2455.0	3	1227.5	4	818.3	4	613.7	4	1227.5	4	
4.0	1399.4	13	972.3	17	779.7	16	610.9	17	610.9	17	
6.0	985.9	30	695.2	38	526.7	35	419.7	38	377.0	37	
8.0	755.7	53	541.1	68	397.4	63	320.2	68	209.5	66	
10.0	607.9	83	440.0	106	316.5	98	256.8	106	132.0	103	
12.0	504.2	119	368.0	152	260.6	141	212.7	152	89.9	149	
14.0	426.7	162	313.8	207	219.4	192	179.8	207	64.5	202	
16.0	366.2	212	271.1	270	187.6	251	154.3	270	48.1	264	
20.0	276.5	330	207.5	422	140.8	392	116.6	422	28.7	413	

Cantilever load

Span m	1 x Load kg	Deflection mm	UDL		Deflection	
			kg/m	mm	kg/m	mm
0.5	1231.8	1	2460.8	0.01		
1.0	1230.4	12	1227.5	0.09		
1.5	880.0	43	816.4	0.30		
2.0	698.0	10.8	610.9	0.71		
2.5	577.2	21.9	410.9	1.17		
3.0	491.0	38.7	290.3	1.73		
3.5	426.3	62.4	219.3	2.43		
4.0	375.8	94	171.2	3.27		

Multiple supported span

Span m	CPL kg	Deflection mm	2 x Load		UDL	
			kg	mm	kg	mm
2.0	1783.4	1	914.4	0.1	980.8	0.5
4.0	1703.4	6	903.6	0.5	487.5	3.9
6.0	1184.9	14	653.0	1.2	283.0	11.4
8.0	927.6	25	513.3	2.3	163.7	20.9
10.0	756.1	41	419.5	3.7	107.9	33.6
12.0	632.6	59	351.7	5.3	75.8	49.0
14.0	538.7	79	299.9	7.2	55.6	66.7
16.0	464.4	102	258.9	9.3	42.2	86.2
20.0	352.7	151	197.0	13.8	25.8	144.7


🌐 Find complete loading tables on SIXTY82.nl

All loading data is based on calculations per EN 17115:2018 and the following assumptions:


- Static loads only.
- Spans supported or suspended at both ends.
- Triangle trusses solely used apex-up, apex-down.
- 2 chords truss to be placed upright or supported from top chord and loaded from bottom chord.
- Truss spans can be assembled from elements of different length.
- Loading data is only applicable when trusses are solely assembled with TPM03/04 (42CrMo4) spigots.
- Interaction of bending moment and shear force considered.
- Self-weight of truss is already considered.
- Assembled truss structures need an individual structural calculation, please contact SIXTY82 or a structural engineer.
- Read the manual before use.
- Higher loading can be allowed depending on the truss configuration.

TPM29L Corners Ladder

48.3 x 3 mm


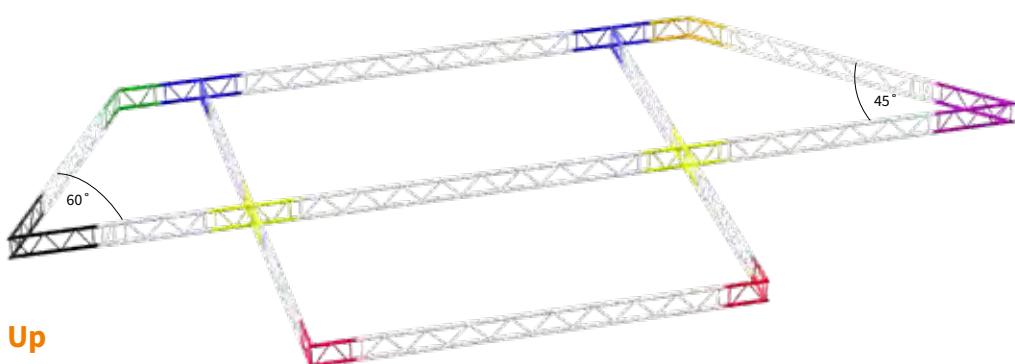


Up

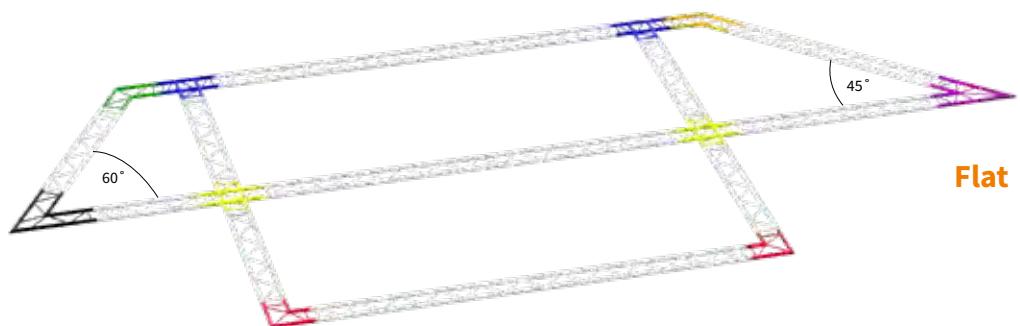


Flat

2way
up

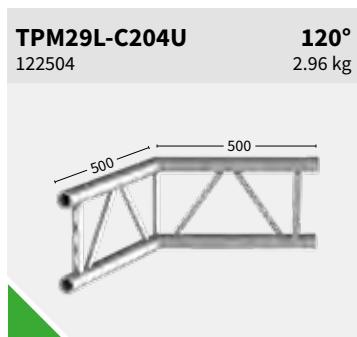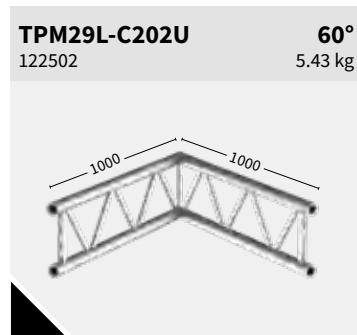

2way
flat

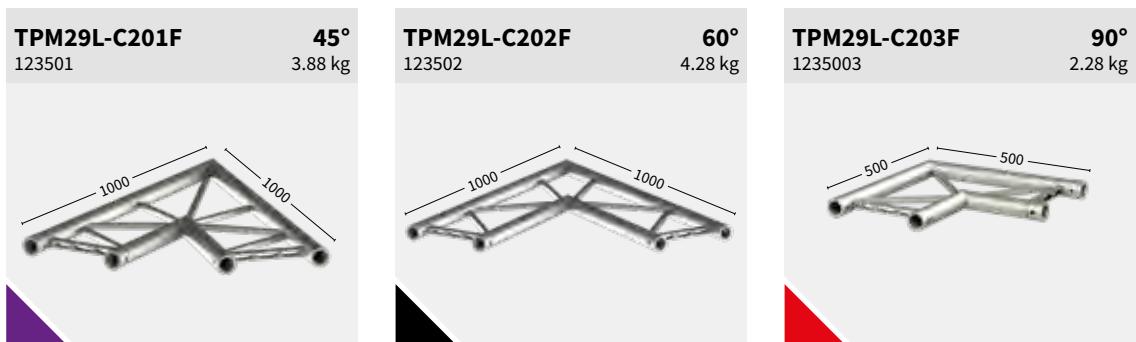


3way



4way




Box



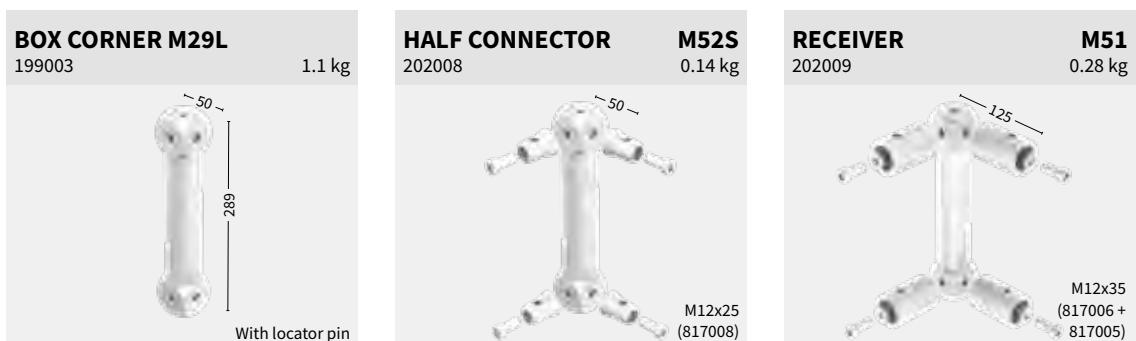


TPM29T Corners Triangle



48.3 x 3 mm

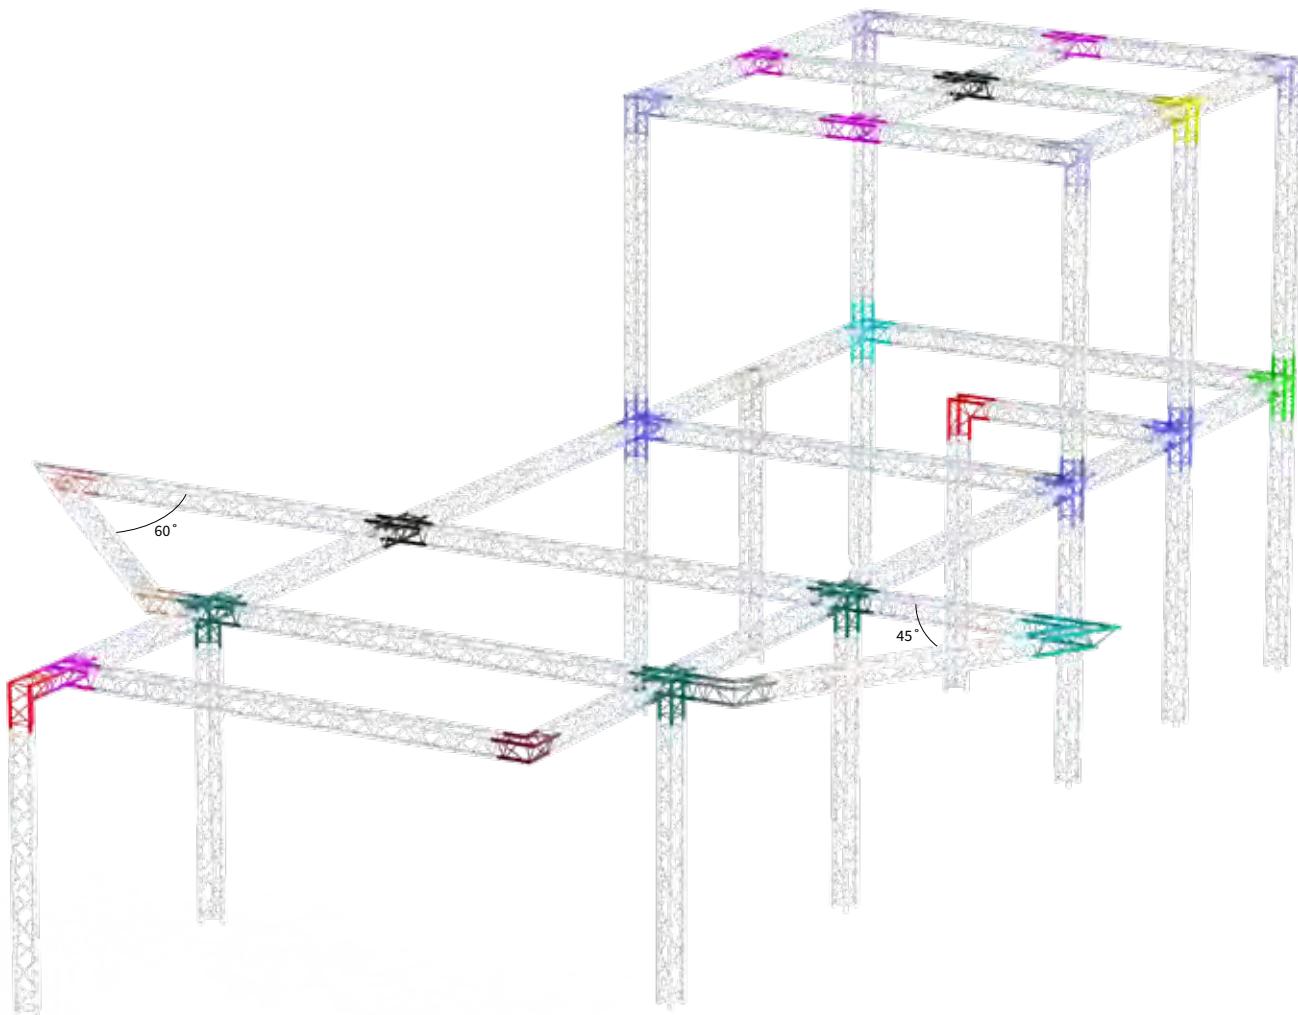




2way

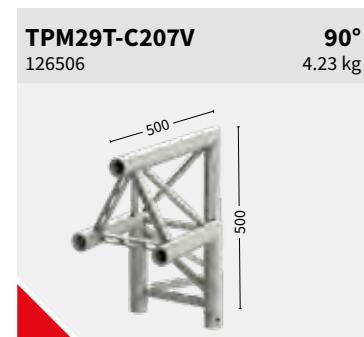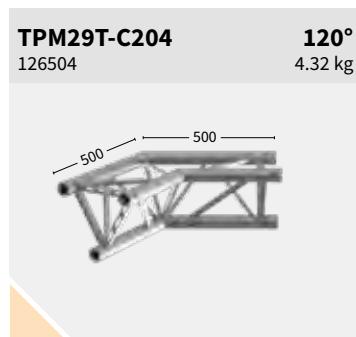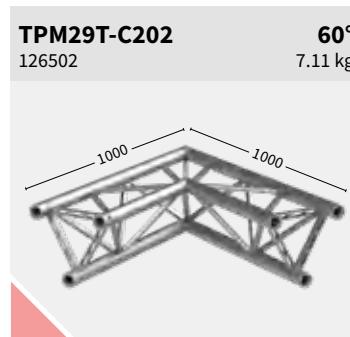

3way

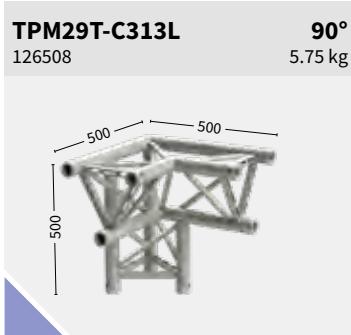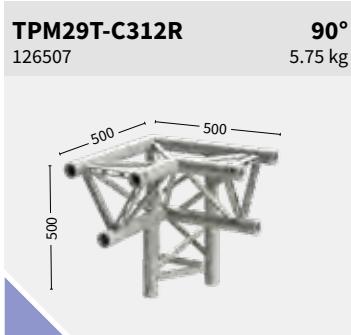

4way

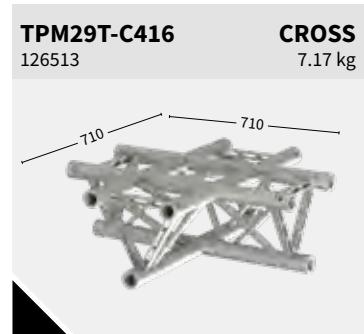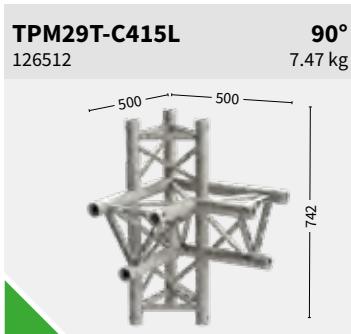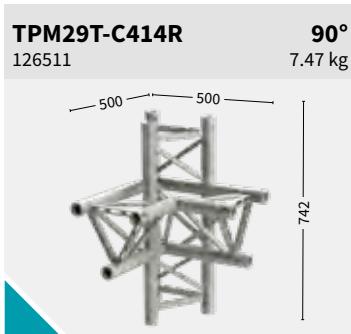


5way







TPM29S Corners Square


48.3 x 3 mm

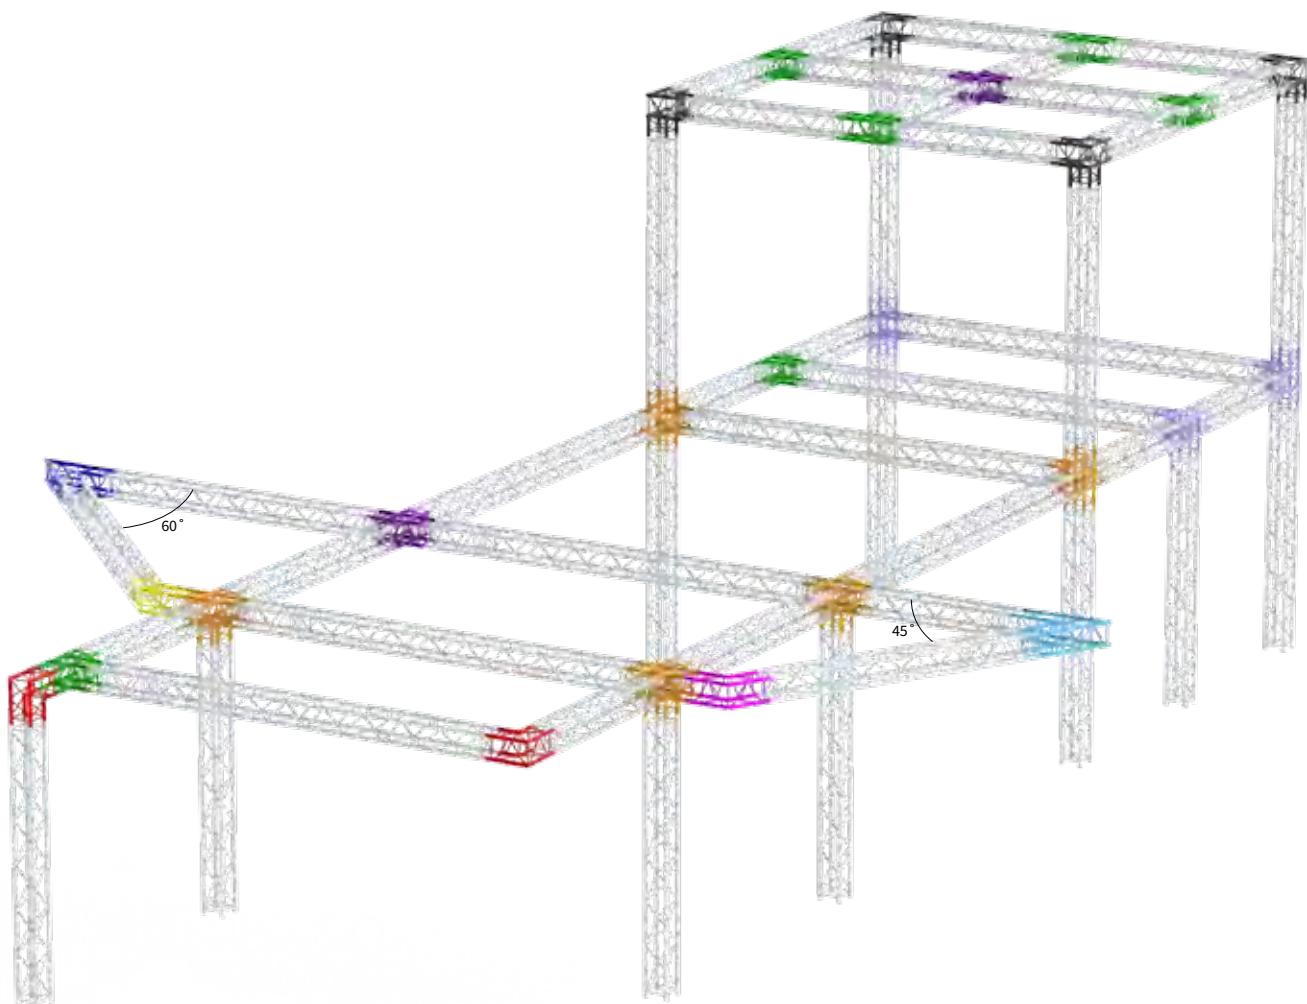


2way

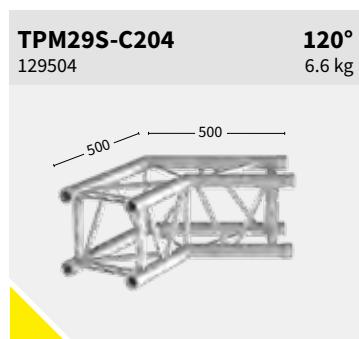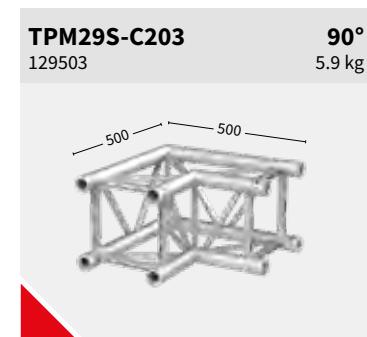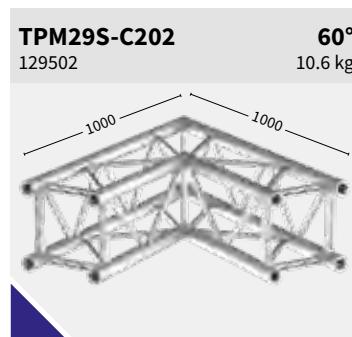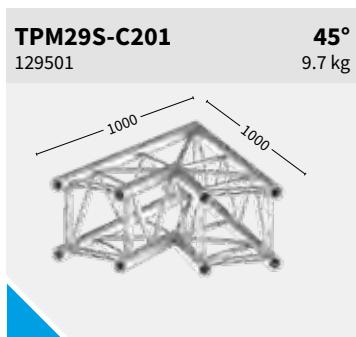


3way

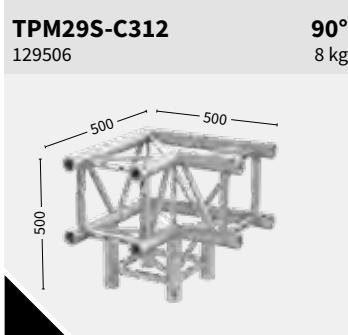




4way

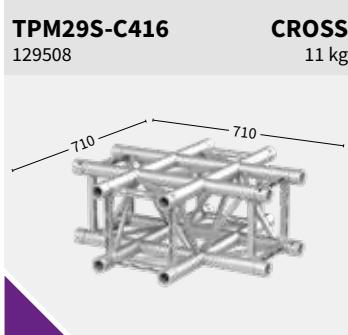

5way

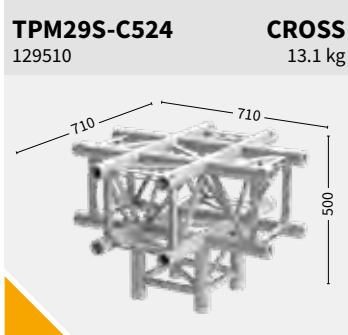

BOX

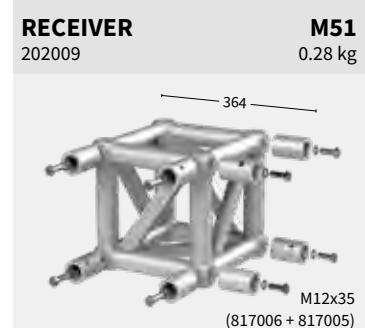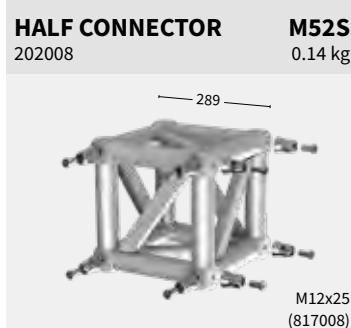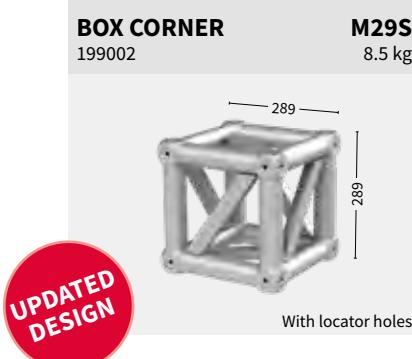

TPM29 Circles

48.3 x 3 mm



3 kg/m

M

ALU/BLACK

((RFID))
READY

P.128

TPM29L Circle part - up

Code	∅ Diameter	Angle	Parts/Circle
124501	2 m	90	4
124502	3 m	90	4
124503	4 m	90	4
124504	5 m	90	4



3 kg/m

M


ALU/BLACK

((RFID))
READY

P.128

TPM29L Circle part - flat

Code	∅ Diameter	Angle	Parts/Circle
124505	2 m	90	4
124506	3 m	90	4
124507	4 m	90	4
124508	5 m	90	4

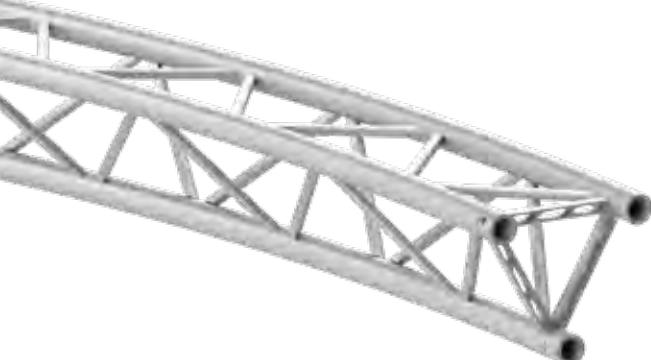

5 kg/m

M

ALU/BLACK

((RFID))
READY

P.128

TPM29T Circle part

Code	∅ Diameter	Angle	Parts/Circle
127501	2 m	90	4
127502	3 m	90	4
127503	4 m	90	4
127504	5 m	90	4
127505	6 m	45	8
127506	8 m	45	8
127507	10 m	30	12
127508	10 m	45	8



6.4 kg/m

M

ALU/BLACK

((RFID))
READY

P.128

TPM29S Circle part

Code	∅ Diameter	Angle	Parts/Circle
130501	2 m	90	4
130502	3 m	90	4
130503	4 m	90	4
130504	5 m	90	4
130505	6 m	45	8
130506	8 m	45	8
130507	10 m	30	12
130508	10 m	45	8

- Subject to tolerance, because product is 100% handmade.

BASE PLATE M29T

211003

1.01 kg


BASE PLATE M29S


211004

1.65 kg


LIFTING BRACKET M29S


212001

2.55 kg

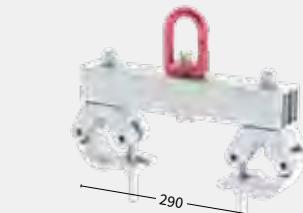
HANG-ON82 M29 TO M29S-T

251003

10.2 kg

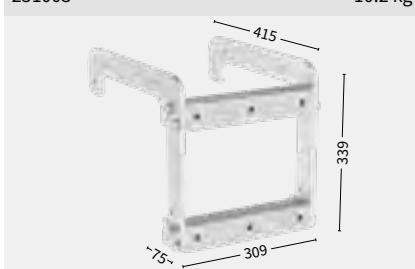
HANG-ON82 M29 TO M29L

251004

7.06 kg


BOOK CORNER M29S-T

198001

11.3 kg


WALL ADAPTER M29S-T


212006

4.35 kg


BOOK-FIX M29S-T

198004

4.43 kg

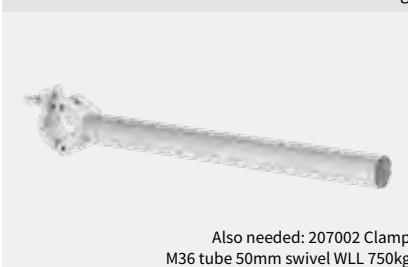
STEEL BASE M29S


211019


TRUSS HINGE TPM29S

Code Finish

211020 Black

211021 Zinc

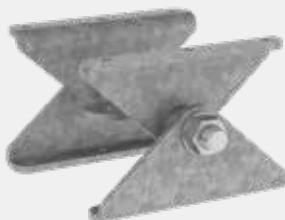
LIFTINGPLATE M29S-T/M39R

Code Finish

212010 Black

212011 Zinc



BASE PLATE STEEL M29/39S-T

Code Finish

35 kg

211009 Black

211010 Zinc

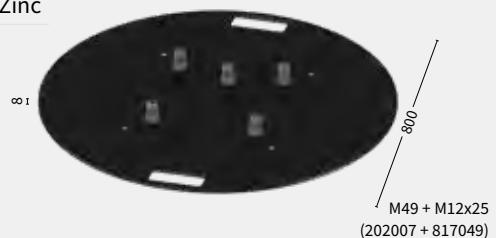

BASE PLATE STEEL M29/M39S-T

Code Finish

41 kg

211011 Black

211012 Zinc

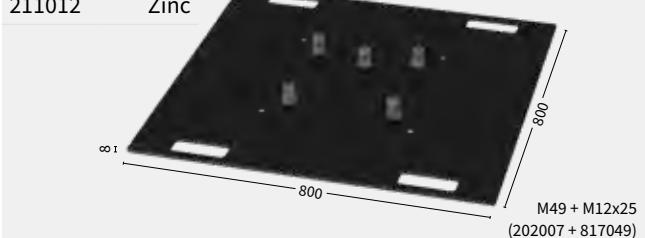


TPM29SMB Middle Beam

48.3 x 3 mm

TPM29SMB Middle Beam

-  6.4 kg/m
-  M
-  ALU/BLACK
-  ((RFID))
READY

Code	Length
120506	100 cm
120507	150 cm
120508	200 cm
120509	250 cm
120510	300 cm

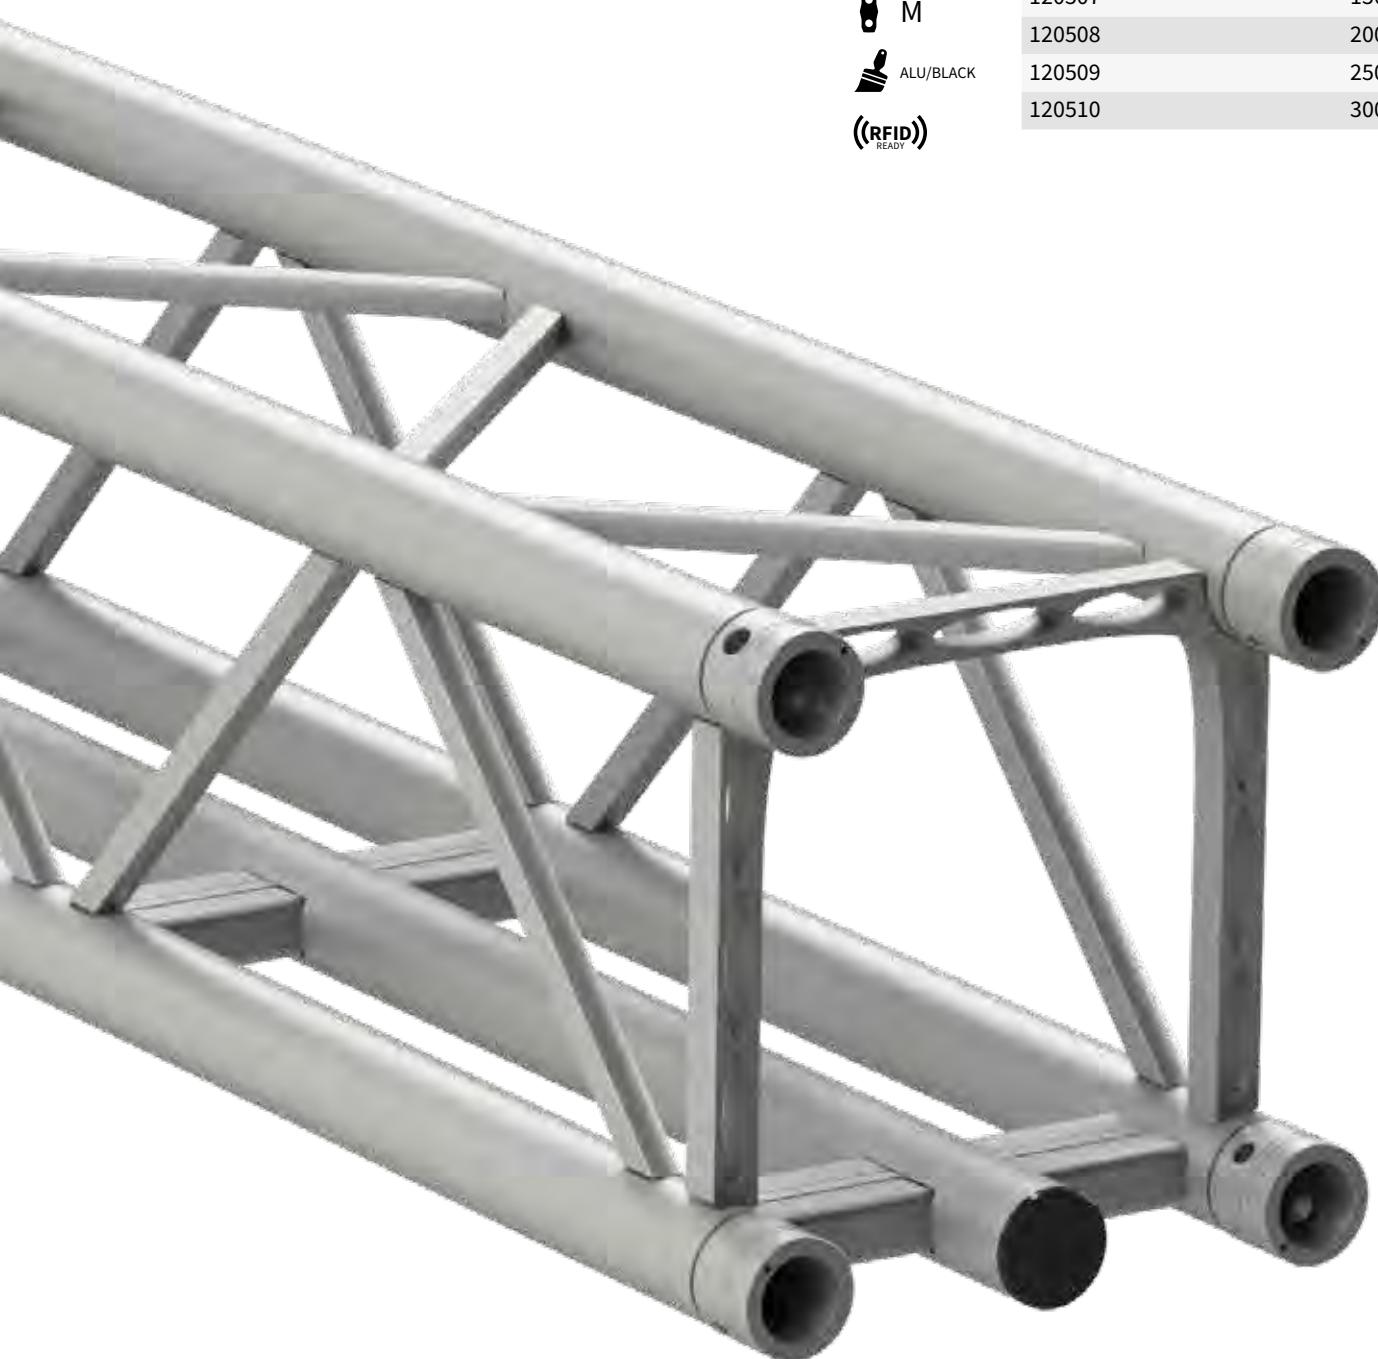

BOX corner invention evolved

Locator pin design and special male connector will allow much easier user configuration of box corners.

Higher shear force capacity due to lower eccentricity when using male connectors.



Less components giving increased user simplicity and better value.

High allowable bending moment due to bigger diagonal.



Length

Square	30
--------	----

Corners

Square	32
--------	----

Circle

Square	34
--------	----


Middle beam	34
--------------------	----

Accessories	35
--------------------	----

Hang-on82	36
------------------	----


Wall adapter82	38
-----------------------	----

Accessories M Series	39
-----------------------------	----

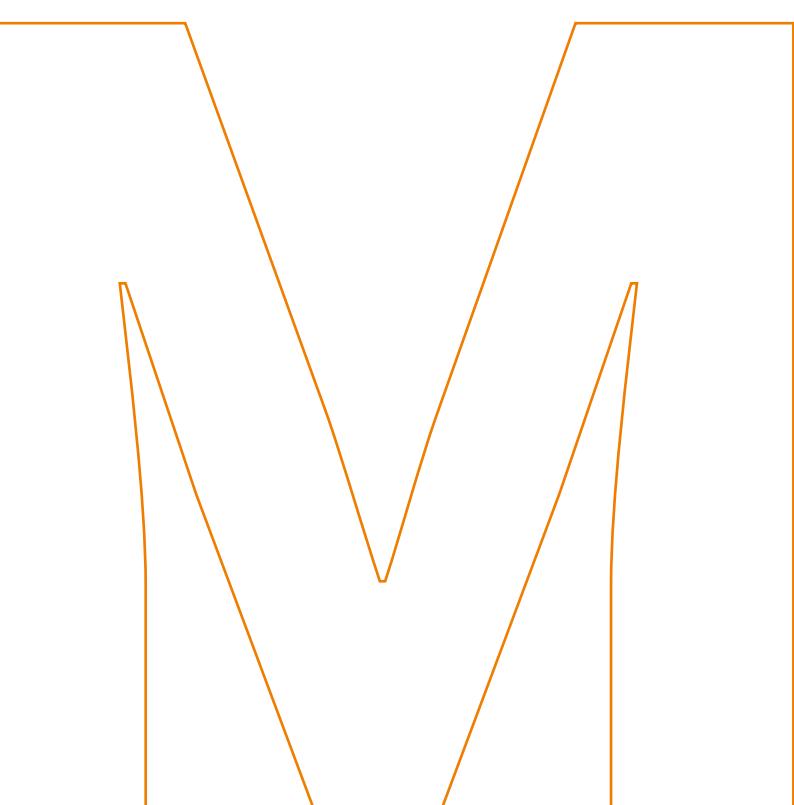

M39S Length Square

48.3 x 3 mm

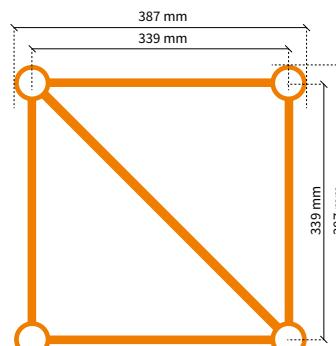

- 6.9 kg/m
- (RFID READY)
- M
- P.128
- ALU/BLACK

Square - M39S

Code	Length
138001	21 cm
138002	25 cm
138004	50 cm
138005	81 cm
138006	100 cm
138008	200 cm
138010	300 cm
138012	400 cm

Load table M39S

Span m	CPL		Deflection		2 x load		Deflection		3 x load		Deflection		4 x load		Deflection		UDL		Deflection	
	kg	mm	kg	mm	kg	mm	kg	mm	kg	mm	kg	mm	kg	mm	kg	mm	kg/m	mm		
2.0	2512.6	3	1256.3	3	837.5	3	628.1	3	1256.3	3	625.0	13	414.6	29	279.4	52	120.7	116		
4.0	1726.7	10	1227.7	13	833.4	12	625.0	13	625.0	13	534.7	30	333.7	83	237.4	162	87.0	158		
6.0	1244.2	23	858.9	30	681.0	28	518.5	49	412.2	53	412.2	53	251.6	196	205.3	211	65.2	207		
8.0	967.3	41	680.2	53	518.5	49	412.2	53	344.8	110	344.8	110	292.3	150	237.4	162	374.3	259		
10.0	786.3	65	560.1	83	415.9	77	333.7	83	292.3	150	292.3	150	251.6	196	205.3	211	374.3	259		
12.0	658.1	93	473.4	119	344.8	110	278.6	119	251.6	196	251.6	196	212.2	307	192.2	307	157.9	330	374.3	259
14.0	561.7	127	407.5	162	292.3	150	237.4	162	212.2	307	212.2	307	180.9	224	157.9	330	120.7	116	374.3	259
16.0	486.3	166	355.3	211	251.6	196	205.3	211	180.9	224	180.9	224	157.9	330	157.9	330	95.5	36	374.3	259
20.0	374.3	259	277.2	330	192.2	307	157.9	330	157.9	330	157.9	330	120.7	116	100.3	108	39.5	323	374.3	259

Cantilever load

Span m	1 x Load		Deflection		UDL		Deflection	
	kg	mm	kg/m	mm	kg	mm	kg	mm
0.5	1260.9	0	2518.8	0				
1.0	1259.4	1	1256.3	1				
1.5	1107.4	3	835.4	2				
2.0	861.1	8	625.0	4				
2.5	721.3	16	498.8	8				
3.0	619.5	29	365.4	13				
3.5	541.9	47	270.9	18				
4.0	480.8	71	212.0	24				

Multiple supported span


Span m	CPL		Deflection		2 x Load		Deflection		UDL		Deflection	
	kg	mm	kg	mm	kg	mm	kg	mm	kg/m	mm	kg/m	mm
2.0	1825.1	0	935.5	0	1003.8	0						
4.0	1813.8	4	923.8	3	498.8	2						
6.0	1477.6	10	825.5	9	330.5	8						
8.0	1154.3	19	635.7	17	204.7	15						
10.0	954.6	30	527.5	27	134.0	25						
12.0	808.2	44	447.7	40	95.5	36						
14.0	695.7	60	386.1	55	70.9	50						
16.0	606.0	79	336.8	71	54.4	66						
20.0	470.3	119	262.0	108	34.1	112						

Find complete loading tables on SIXTY82.nl

All loading data is based on calculations per EN-1999-1-1 and the following assumptions:

- Static loads only.
- Spans supported or suspended at both ends.
- Triangle trusses solely used apex-up, apex-down.
- 2 chords truss to be placed upright, supported from top chord and loaded from bottom chord.
- Truss spans can be constructed of elements of different length.
- Interaction between bending moment and shear force considered.
- Self-weight of truss is already considered.
- Assembled truss systems need an individual structural calculation. Please contact SIXTY82 or a structural engineer.
- Read the manual before use.
- Higher loading can be allowed depending on the truss configuration.


Truss terminology... **what is what?**

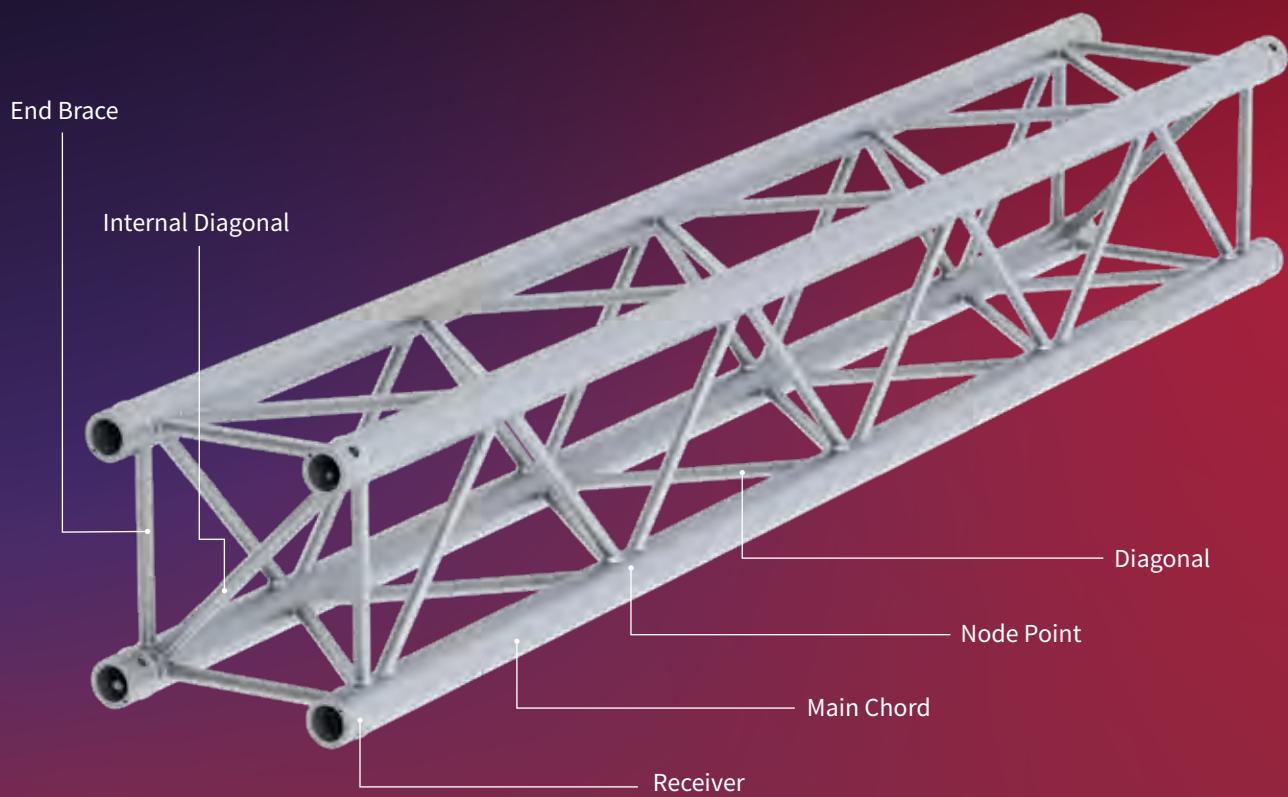




For further information, please refer to the SIXTY82 original user manual.

M39S Corners Square


48.3 x 3 mm

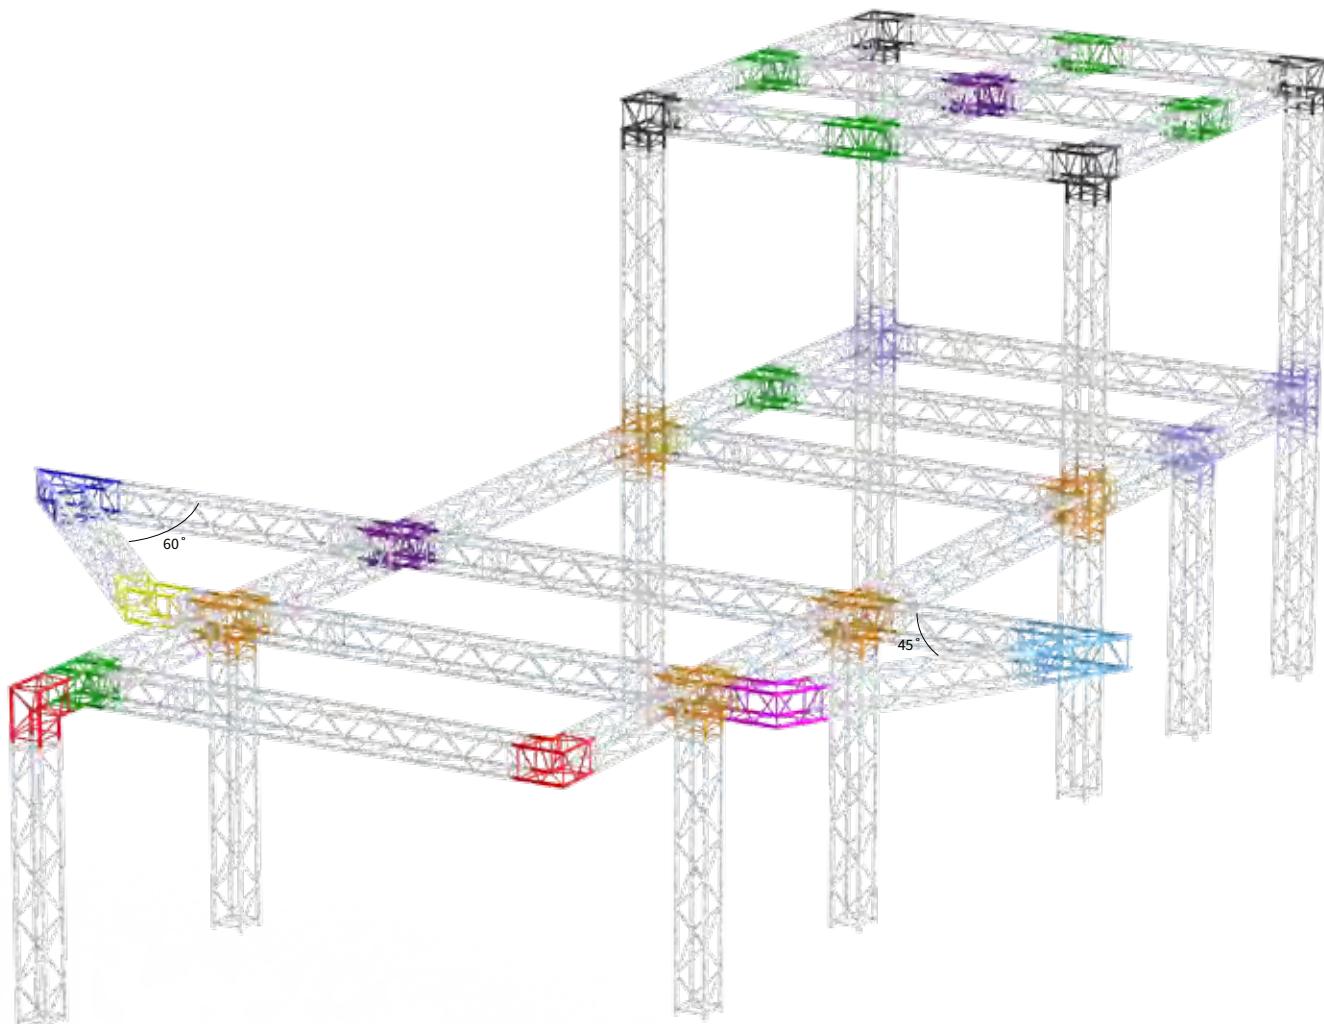

2way

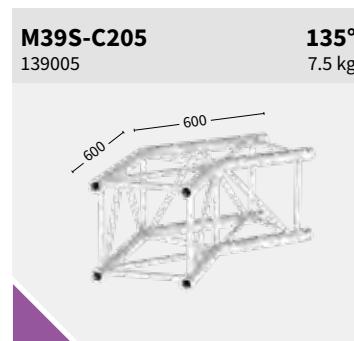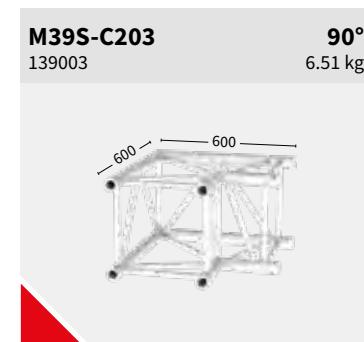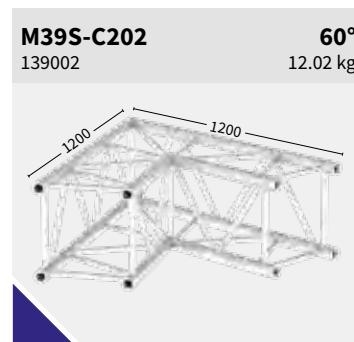

3way

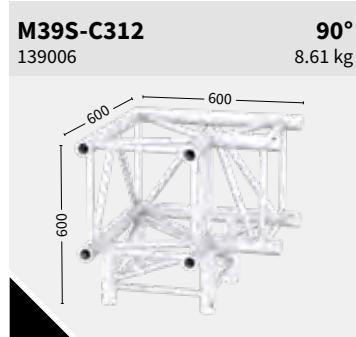


4way



5way



Box

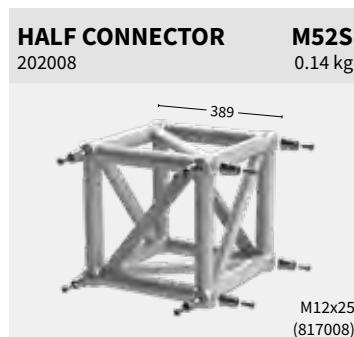

M39S Circles

48.3 x 3 mm



- Subject to tolerance, because product is 100% handmade.

M39S Circle part

- 6.3 kg/m
- M
- ALU/BLACK
- ((RFID))
READY
- P.128

Code	∅ Diameter	Angle	Parts/Circle
140001	2 m	90	4
140002	3 m	90	4
140003	4 m	90	4
140004	5 m	90	4
140005	6 m	45	8
140006	8 m	45	8
140007	10 m	45	8
140008	10 m	30	12

M39S Middle Beam



M39S Middle Beam

- 7.9 kg/m
- M
- ALU/BLACK

- ((RFID))
READY
- P.128

Code	Length
143002	100 cm
143004	200 cm
143006	300 cm

BASE PLATE M39T

211005

1.63 kg


BASE PLATE M39S


211006

2.92 kg


LIFTING BRACKET M39S


212002

2.6 kg

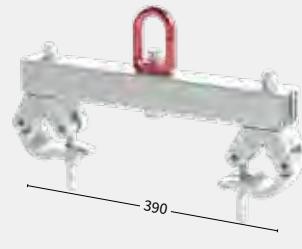
HANG-ON82 M39 TO M29S-T


251005

11.72 kg

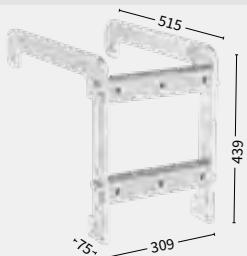
HANG-ON82 M39 TO M39S-T

251006

13.1 kg

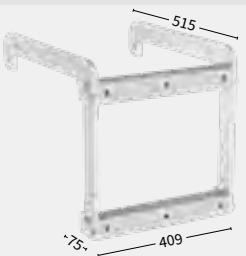
HANG-ON82 M39 TO M39L


251007

8.58 kg


WALL ADAPTER M39R

212006

4.35 kg

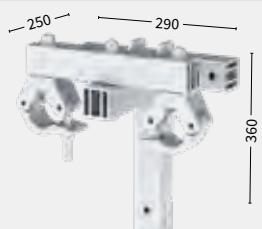
WALL ADAPTER M39S-T

212009

4.65 kg


BOOK CORNER M39S-T

198005

24.5 kg


LIFTINGPLATE M29S-T/M39R

Code


Finish

212010

Black

212011

Zinc


BOOK-FIX M39S-T

198006

4.43 kg



Also needed: 207002 Clamp
M36 tube 50mm swivel WLL 750kg

BASE PLATE STEEL M29/39S-T

Code

Finish

35 kg

211009

Black

211010

Zinc


BASE PLATE STEEL M29/M39S-T

Code

Finish


41 kg

211011

Black

211012

Zinc

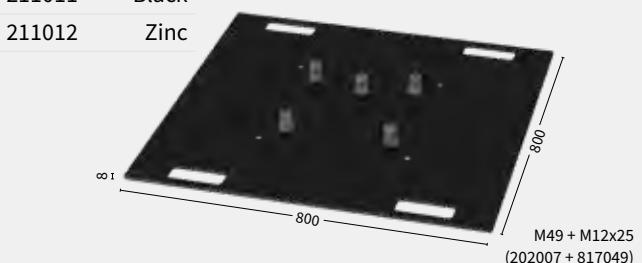

WHY HANG-ON82?


- Alternative for the T-joint
- Flexible in use: can be used on every point in the grid
- Easy to use and assemble
- Can be used in conjunction with box corners and weld corners (spacers or special truss length needed)
- Can be used for ladder, triangle and square truss
- Natural and black finish available
- Load capacity 900 KG

Spare parts

1	202008	Half connector M52S	M series
2	817008	Bolt M12x25 Low head	M series
3	251008	Hang-on82 Spacer 30 mm	M series
4	817025	Bolt M12x60 Low head	M series

Safety


1 x 251014	Hang-on82 safety
2 x 817002	Nut self locking M12 DIN985
2 x 817005	Washer M12 Spring DIN127B
2 x 817006	Bolt M12x035 DIN933

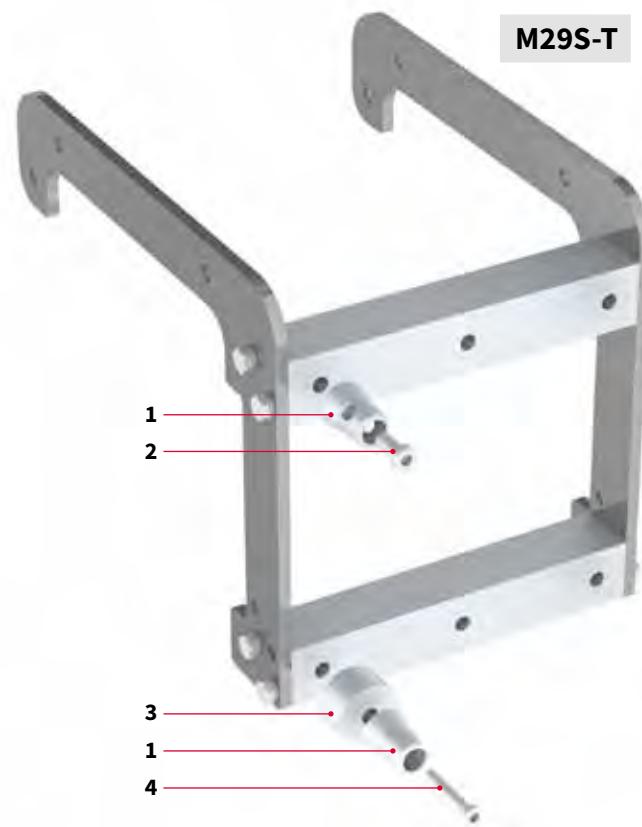

The design of this product is intellectually protected.




Hang-on82 in use

- 1 The grid is built with **weld corners**: the hang-on needs to be assembled with 30 mm spacers, and an extra piece of 210 mm (or 710 mm) truss needs to be used in the span (spare parts 1, 3 and 4).
- 2 The grid is built with **box corners with M51 receivers** (75 mm): the hang-on needs to be assembled with M52S connectors, and the same length of truss can be used for the span as is used in the grid (spare parts 1 and 2).
- 3 The grid is built with **box corners with M52S connectors**: the hang-on needs to be assembled with spacers, and an extra piece of 290 mm truss needs to be used in the span (spare parts 1, 3 and 4).

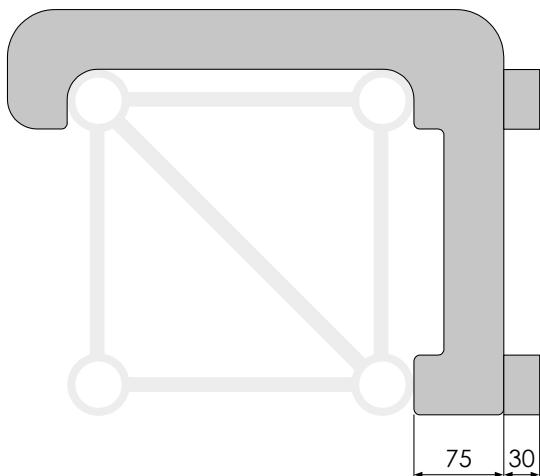

Scan the QR-Code

to watch the Hang-on82 technical video

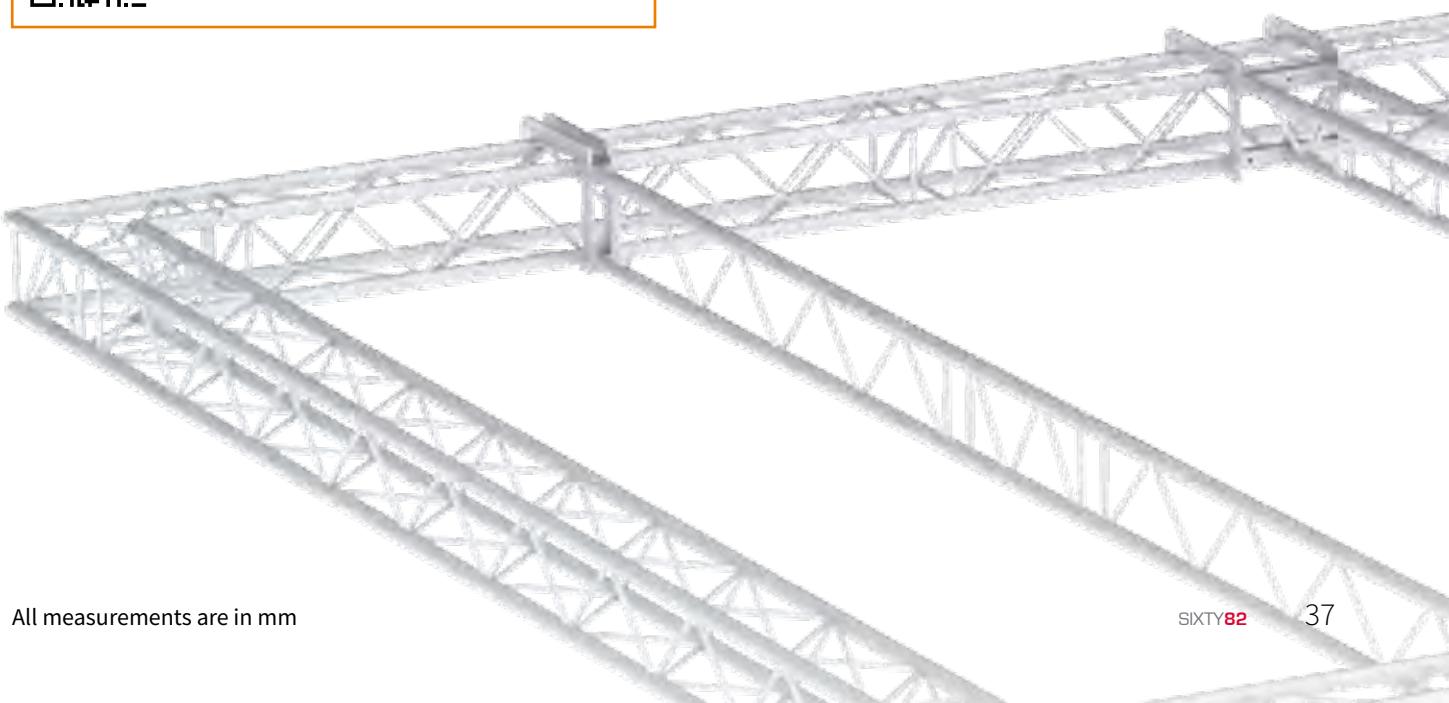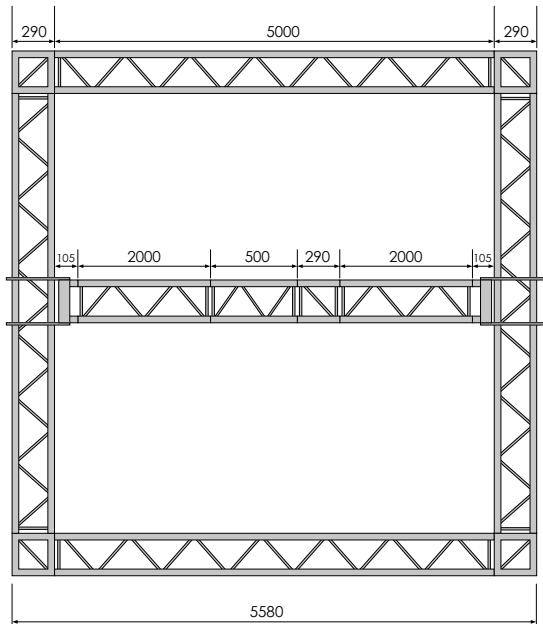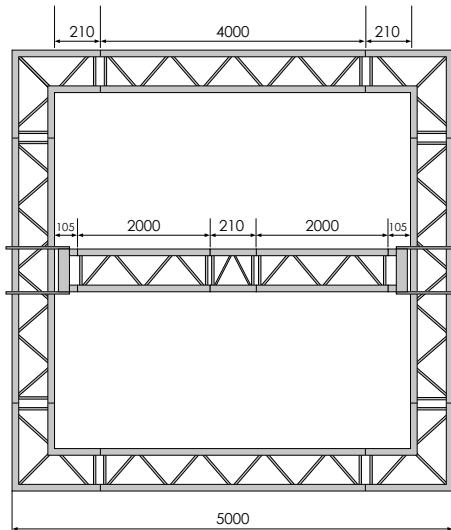

M Wall adapter82

WHY WALL ADAPTER82?

- Unique design
- The width is the same as the truss
- Adjustable position of clamps
- Can be used upright and upside down
- Suitable for triangle, square and rectangular shaped truss
- Can be positioned on an angle
- Suitable for M39R / M29S-T and M39S-T
- Load capacity 500 KG**



WALL ADAPTER M39R / M29S-T

212006



4.35 kg



WALL ADAPTER M39S-T


212009

4.65 kg

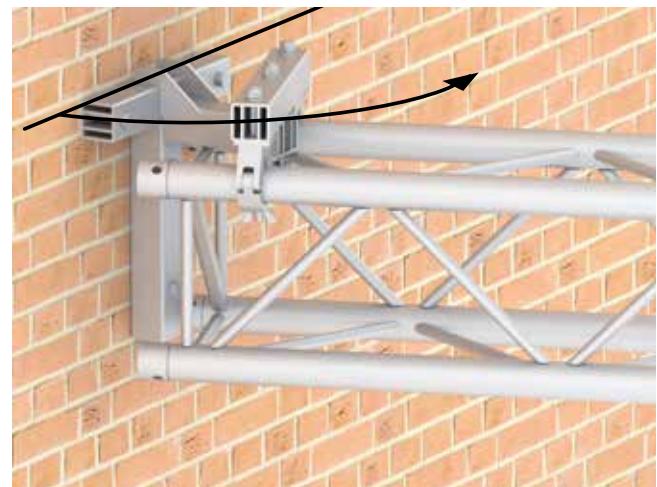

* Connection materials for the wall are not included.



Accessories M Series

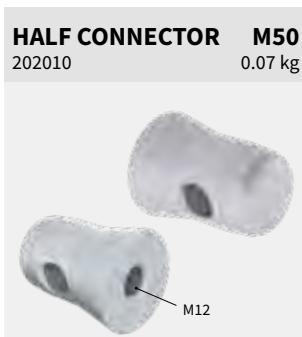

SPACER

Code	Length	Weight
202011	2 mm	0.16 kg
202027	5 mm	0.18 kg
202012	10 mm	0.2 kg
202013	20 mm	0.25 kg
202014	30 mm	0.3 kg
202015	40 mm	0.36 kg
202016	50 mm	0.41 kg

L

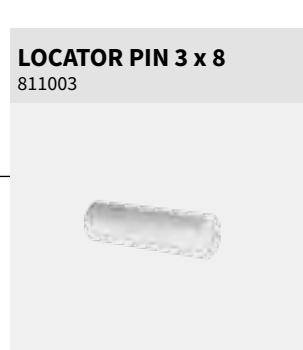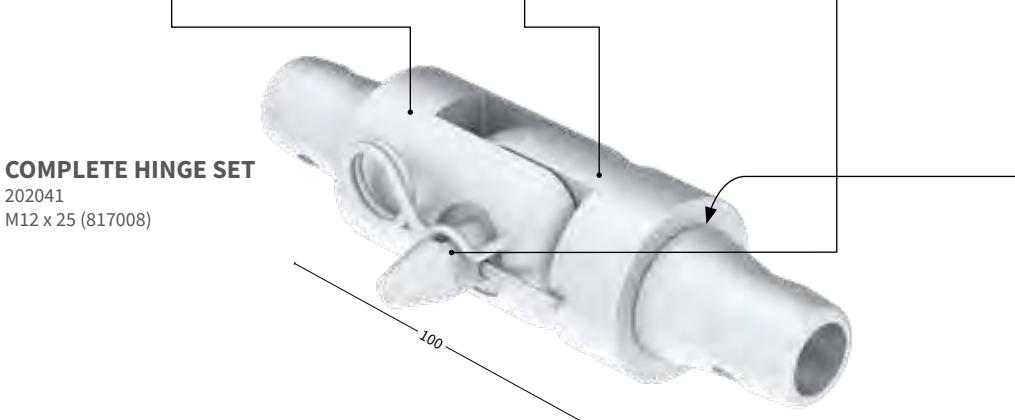

All measurements are in mm



Length

Square	42
--------	----

Corners

Square	43
--------	----

Circle

Square	43
--------	----


Middle Beam

Square	43
--------	----

Accessories


Accessories L Series	44
-----------------------------	----

Accessories L Series	45
-----------------------------	----

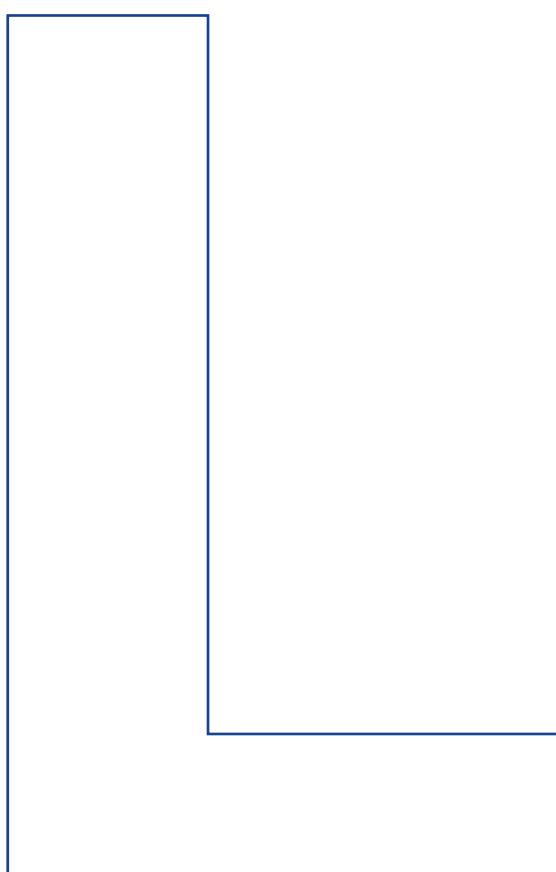

L52S Length Square

50 x 4 mm

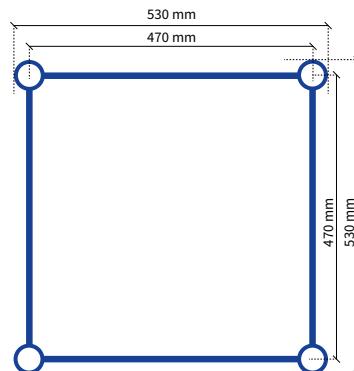

Square - L52S


Code **Length**

161001	50 cm
161002	60 cm
161003	80 cm
161004	100 cm
161005	120 cm
161006	150 cm
161007	200 cm
161008	240 cm
161009	250 cm
161010	300 cm
161012	400 cm

15 kg/m



(RFID
READY)



L



P.128



Load table L52S

Span m	CPL kg	Deflection mm	2 x load kg	Deflection mm	3 x load kg	Deflection mm	4 x load kg	Deflection mm	UDL kg/m	Deflection mm
2.0	4846.8	2	3066.8	2	2279.7	2	1709.8	2	3419.5	2
6.0	2255.1	15	1518.9	19	1271.6	17	976.2	19	960.7	18
10.0	1480.1	41	1033.6	52	799.5	48	632.2	52	336.6	51
14.0	1094.3	80	779.3	102	576.5	95	464.5	102	164.7	100
18.0	845.5	132	621.1	169	422.8	157	352.3	169	93.9	165
20.0	733.6	163	550.2	208	366.8	193	305.7	208	73.4	204
22.0	639.4	197	479.6	252	319.7	234	266.4	252	58.1	246
24.0	558.6	235	418.9	300	279.3	278	232.7	300	46.5	293
26.0	487.9	275	365.9	352	243.9	327	203.3	352	37.5	344

Cantilever load

Span m	1 x Load kg	Deflection mm	UDL kg/m	Deflection mm
0.5	3430.3	0	6853.5	0
1.0	2420.6	1	3419.5	1
1.5	1839.4	2	1919.4	1
2.0	1518.7	5	1208.5	3
2.5	1292.6	10	824.0	5
3.0	1124.5	17	611.5	7
3.5	994.6	28	473.7	10
4.0	891.0	43	377.9	14

Multiple supported span

Span m	CPL kg	Deflection mm	2 x Load kg	Deflection mm	UDL kg/m	Deflection mm
2.0	4891.4	0	2565.3	0	2732.7	0
6.0	2526.4	6	1373.7	5	565.5	4
10.0	1749.5	18	956.9	16	240.8	15
14.0	1327.8	38	726.3	34	133.1	31
18.0	1059.6	64	578.2	57	83.7	53
20.0	957.9	80	522.0	71	68.4	73
22.0	854.9	94	473.9	85	56.7	107
24.0	746.7	107	432.1	101	46.5	151
26.0	652.3	119	395.4	118	37.5	208

Find complete loading tables on SIXTY82.nl





All loading data is based on calculations per EN-1999-1-1 and the following assumptions:

- Static loads only.
- Spans supported or suspended at both ends.
- Triangle trusses solely used apex-up, apex-down.
- 2 chords truss to be placed upright, supported from top chord and loaded from bottom chord.
- Truss spans can be constructed of elements of different length.

- Interaction between bending moment and shear force considered.
- Self-weight of truss is already considered.
- Assembled truss systems need an individual structural calculation. Please contact SIXTY82 or a structural engineer.
- Read the manual before use.
- Higher loading can be allowed depending on the truss configuration.

50 x 4 mm

L52 Corners

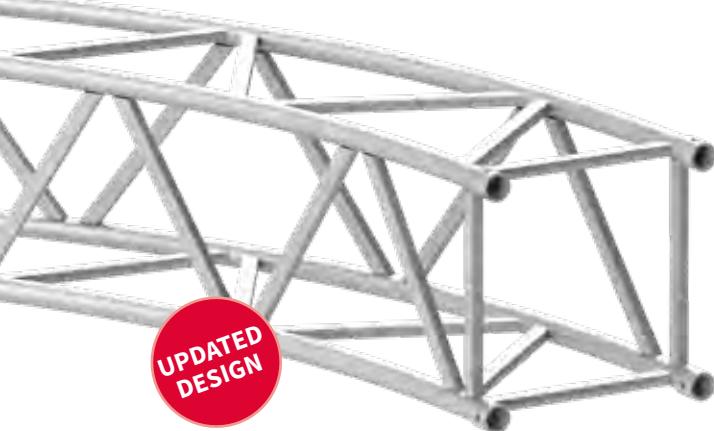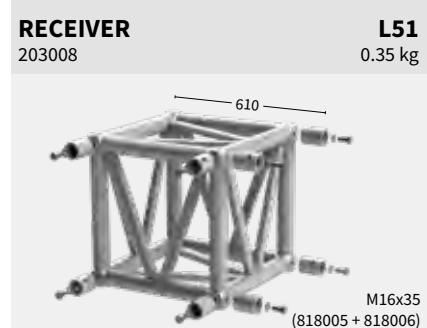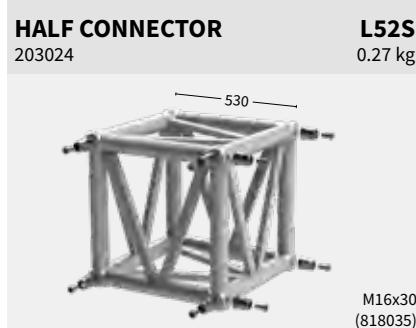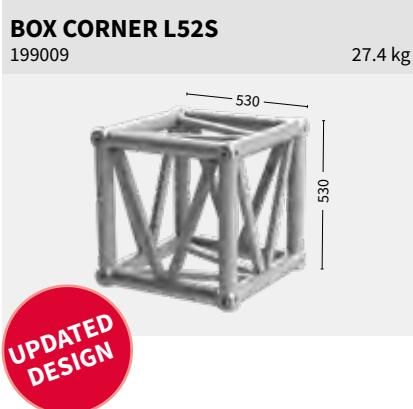

L52S Circle part

Code	∅ Diameter	Angle	Parts/Circle
163001	3 m	90	4
163002	4 m	90	4
163003	5 m	90	4
163004	6 m	90	4
163005	8 m	45	8
163006	10 m	30	12

P.128

• Subject to tolerance, because product is 100% handmade.




L52 Middle Beam







L52 Middle Beam

Code	Length
166004	100 cm
166007	200 cm
166010	300 cm

L52 Accessories

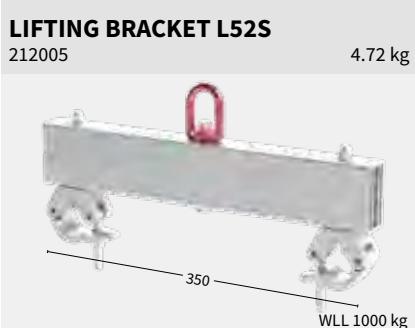

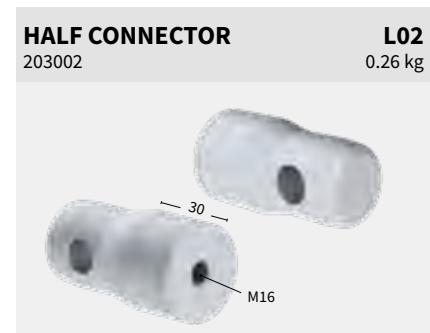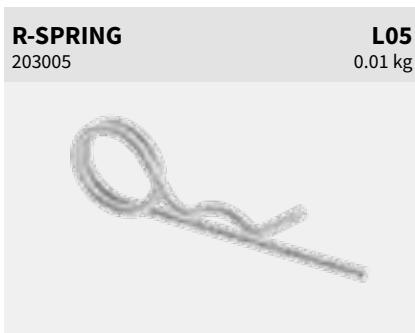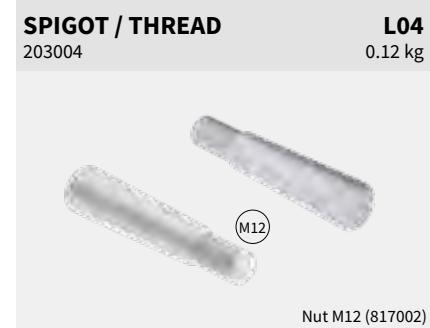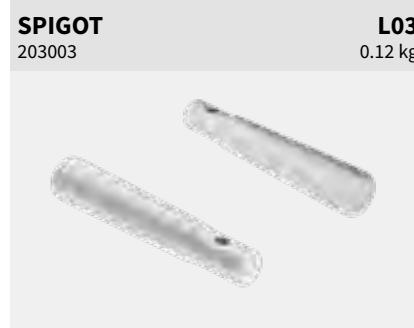

SPACER		
Code	Length	Weight
203009	2 mm	0.3 kg
203010	5 mm	0.33 kg
203011	10 mm	0.36 kg
203012	20 mm	0.44 kg
203013	30 mm	0.51 kg
203014	40 mm	0.59 kg
203015	50 mm	0.67 kg





Length

Rectangle

48

Corners

Rectangle

49



Accessories XL Series

49



XL101R Length Rectangle

● 60 x 6 mm

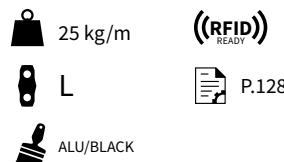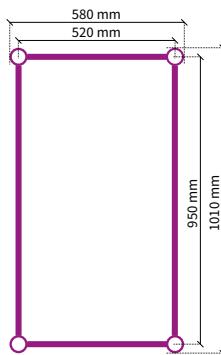

Rectangle - XL101R

Code	Length
171001	80 cm
171002	100 cm
171003	120 cm
171004	200 cm
171005	240 cm
171006	250 cm
171007	300 cm
171009	400 cm
171011	480 cm

Load table XL101R

Span m	CPL kg	Deflection mm	2 x load kg	Deflection mm	3 x load kg	Deflection mm	4 x load kg	Deflection mm	UDL kg/m	Deflection mm
4.0	7034.6	4	4261.0	5	3139.5	4	2500.8	5	2993.4	5
12.0	3549.8	33	2322.7	42	1909.9	39	1549.9	42	808.3	41
16.0	2820.5	58	1894.7	74	1592.0	69	1218.3	74	444.8	73
20.0	2309.7	91	1582.3	116	1273.9	108	990.4	116	276.6	114
24.0	1926.6	131	1341.1	168	1044.8	156	821.8	168	185.2	164
28.0	1624.7	179	1146.9	228	869.5	212	690.4	228	130.1	223
32.0	1377.4	233	984.9	298	729.4	277	583.7	298	94.3	291
36.0	1168.6	295	846.1	377	613.3	350	494.3	377	69.8	369
40.0	987.9	364	724.2	465	514.5	432	417.4	465	52.3	455

Cantilever load

Span m	1 x Load kg	Deflection mm	UDL kg/m	Deflection mm
0.5	5483.6	0	11737.1	0
1.0	4712.9	0	5472.8	0
1.5	4047.9	1	3382.1	0
2.0	3500.7	2	2346.6	1
2.5	3058.4	4	1736.7	2
3.0	2771.9	7	1340.4	3
3.5	2532.3	12	1066.0	4
4.0	2328.6	18	867.2	5

Multiple supported span

Span m	CPL kg	Deflection mm	2 x Load kg	Deflection mm	UDL kg/m	Deflection mm
4.0	6638.8	1	3518.0	1	1991.3	1
12.0	3763.9	11	2037.5	10	409.3	8
16.0	3090.1	22	1683.6	19	257.1	17
20.0	2584.5	35	1415.0	31	175.2	28
24.0	2186.3	51	1201.7	46	125.3	53
28.0	1861.0	70	1026.1	63	92.5	98
32.0	1587.5	89	877.6	80	69.8	167
36.0	1352.0	107	749.2	97	53.3	267
40.0	1145.4	125	636.0	113	41.0	400

🌐 Find complete loading tables on SIXTY82.nl



All loading data is based on calculations per EN-1999-1-1 and the following assumptions:

- Static loads only.
- Spans supported or suspended at both ends.
- Triangle trusses solely used apex-up, apex-down.
- 2 chords truss to be placed upright, supported from top chord and loaded from bottom chord.
- Truss spans can be constructed of elements of different length.





- Interaction between bending moment and shear force considered.
- Self-weight of truss is already considered.
- Assembled truss systems need an individual structural calculation. Please contact SIXTY82 or a structural engineer.
- Read the manual before use.
- Higher loading can be allowed depending on the truss configuration.

60 x 6 mm

Corners Rectangle XL

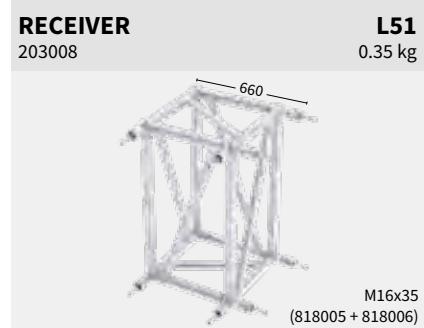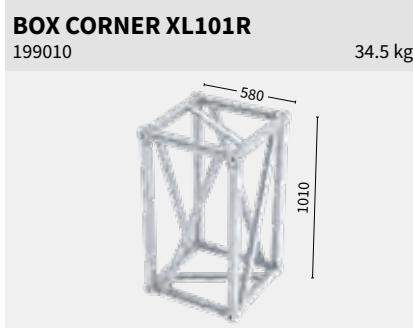

Accessories XL Series

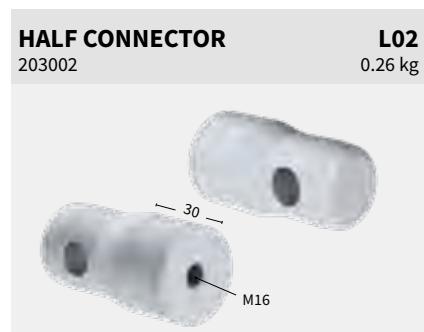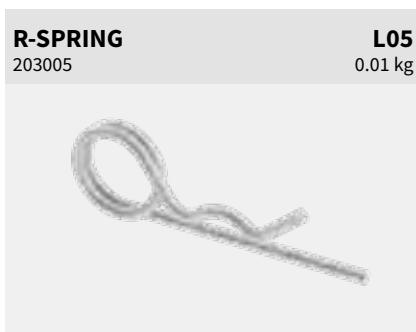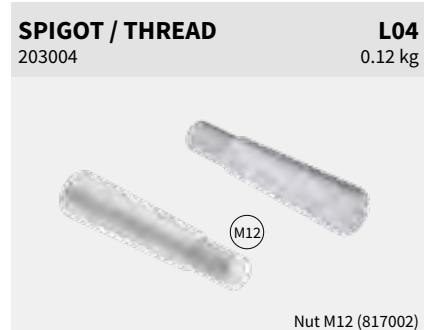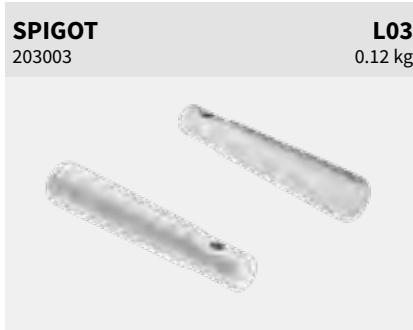

SPACER	Code	Length	Weight
	203009	2 mm	0.3 kg
	203010	5 mm	0.33 kg
	203011	10 mm	0.36 kg
	203012	20 mm	0.44 kg
	203013	30 mm	0.51 kg
	203014	40 mm	0.59 kg
	203015	50 mm	0.67 kg







ΑΛΦΑ⁸²

MODULAR TRUSS SYSTEM



WORLDWIDE PATENT

Opening new doors

ALPHA82 is a brand-new patented truss system that you can configure to the job ahead. The unique ALPHA connectors can be connected to expertly designed ALPHA ladder trusses (sizes L52 and XL101) to form a 3D truss with similar strength compared to standard trusses with the same dimensions.

The ALPHA connector contains M12 size slots on all 4 sides enabling you to connect accessories such as lifting eyes, clamps, brackets, curtain tracks, trolley beams, braces and/or machinery.


Available in two sizes

Connectable to existing **L52S** and the **XL101R** truss
Available in 4 standard lengths:
50 cm, 100 cm, 200 cm and 300 cm.



Endless possibilities

Once delivered, you can assemble, configure, and let your creativity run free, using either our '**standard' ALPHA connector** or your own configuration to create the shape you need. You can easily adjust your L52 truss from 30 cm width up to 80 cm width with just a couple of bespoke ALPHA connectors and no further investment in truss parts. This results in a much more flexible inventory than your competitors, a lower storage cost due to less warehouse space and, ultimately, a better ROI.

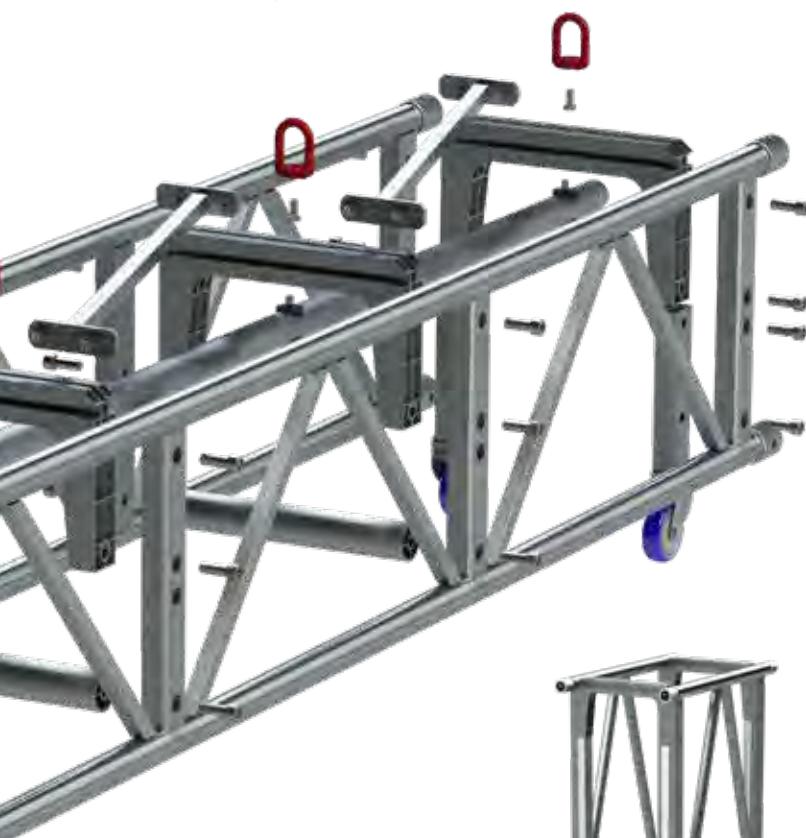

L52 Single

XL101 Single



L52 Vertical Stacked



XL101 Vertical Stacked



I Beam



Stackable Truss



L52 Double Truss



Cable Trunk



L52 Rectangle



Wheel Bracket




60 mm Tube



Stacked L52 Truss

Loading Example:

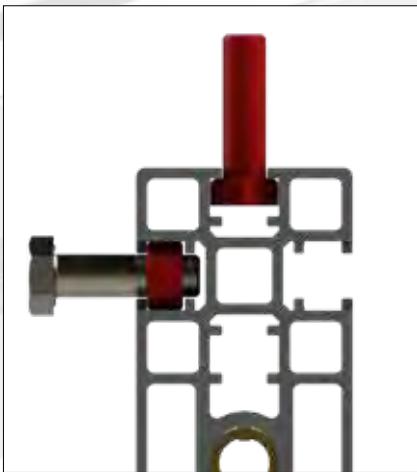

Loading capacity of the Alpha Modular Truss System

Trusses designed from the game-changing **Alpha Modular Truss System** can have different sizes and shapes. To get an idea of the loading capacity of ALPHA trusses we highlight the **ALPHA L52S truss**. The ALPHA L52S truss has the same outer dimensions as the well-known welded L52S truss.

Depending on the ALPHA components chosen in the design of an ALPHA L52S truss, its loading capacities can exceed those of a standard L52S. Using a minimum of components for the ALPHA L52S truss may result in lower loading capacity and stability due to a reduced lateral stiffness depending on the length of a truss span, the amount of supports or the type of load. For custom configurations an ALPHA truss needs an individual structural analysis.

ALPHA L52S truss with **ALPHA connectors** in the top only, has the same maximum loading capacity as an L52S single straight span or multiple supported span if:

1. The truss modules of the truss span are fully equipped with diagonals between the top chords.
2. The truss span has one diagonal per truss module and is horizontally supported at the top chords every 9 meter.
3. The truss span is horizontally supported at the top every 6 meter.
4. The truss span has equally divided hanging points at a distance of maximum 4.5 meter (multiple supported truss). Example: trusses used for trolley track systems.
5. The truss span is 9 meter long and has one diagonal between the top chords in every truss module.
6. The truss span is 6 meter long.

A reduction of the required loading can result in longer allowable spans, less components and no need for horizontal stabilisation.

Load Capacity Bolt Channel

Type of Bolt Head of Nut	Max Load
M12 Hexagon Bolt Head	600 kg
M12 Hexagon Nut Din 934	600 kg

Values given are for vertical loads only.

Allowable loadings are based on Eurocode EN 1999.

Higher loads are possible. E.g. when square nuts or bespoke inserts are used.

The maximum load shall also be checked in relation with the length of the span of the ALPHA joint.



Technical data

AMTS CONNECTOR
181001

L52S
2.2 kg



Bolt M16x045 DIN912

AMTS CONNECTOR L52 STACKABLE
181002



Bolt M16x045 DIN912

AMTS CONNECTOR
181003

XL101
2.4 kg



Bolt M16x045 DIN912

AMTS L52 LADDER

Code	Lenght	Weight
182001	50 cm	5.1 kg
182002	100 cm	7.1 kg
182003	200 cm	11.9 kg
182004	300 cm	16.7 kg



AMTS XL101 LADDER

Code	Lenght	Weight
182031	50 cm	8.5 kg
182032	100 cm	12.5 kg
182033	200 cm	21.9 kg
182034	300 cm	31.3 kg



VERTICAL CONNECTOR TUBE

Code	Type	Weight
183010	AMTS L52S	1.6 kg
183011	AMTS XL101	3.5 kg



including accessoires

DIAGONAL TRUSS

Code	Type	Length
183001	AMTS L52	100 cm
183002	AMTS L52	200 cm
183003	AMTS L52	300 cm
183004	AMTS XL101	100 cm
183005	AMTS XL101	200 cm
183006	AMTS XL101	300 cm



including accessoires

CROSS TUBE 60MM

Code	Type
183012	AMTS L52S
183013	AMTS XL101



Bolt M16x045 DIN912

AMTS WHEEL BRACKET SINGLE

183014 1.9 kg



including accessoires




Scan the QR-Code

to watch the ALPHA82 video

ALPHA Pre-rig Truss

Introducing the **ALPHA82 Pre-rig Truss** - the latest addition to our **ALPHA truss system**. As a leading truss manufacturer, we understand the needs of the AV industry, which is why we've designed the **ALPHA82 Pre-rig Truss** to offer a convenient and efficient pre-rigged solution that can save time and effort during installation.

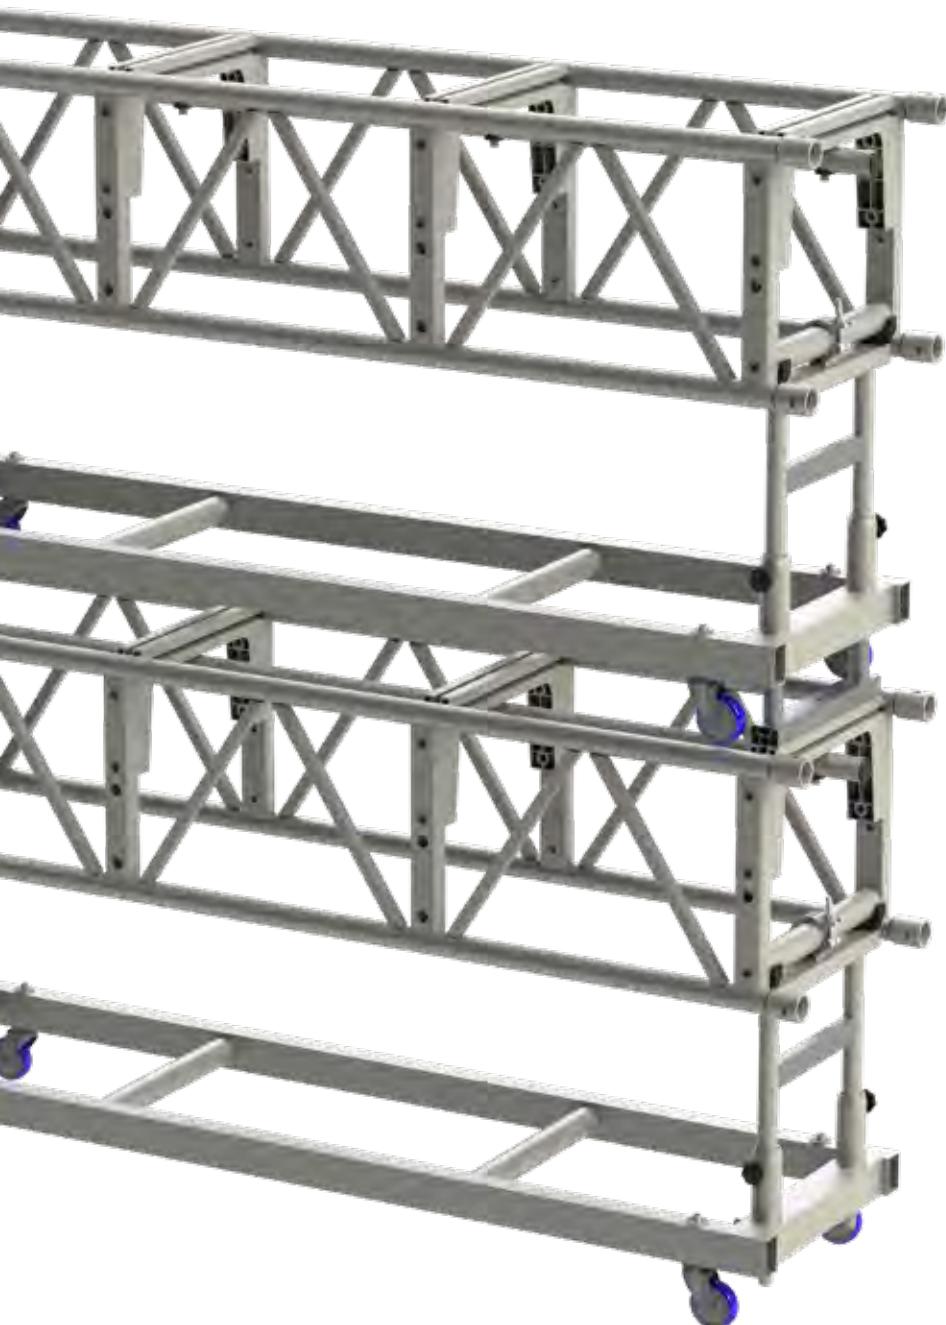

The **ALPHA82 Pre-rig Truss** is a modular truss system that can be easily configured and assembled to fit any venue or event space. The **ALPHA82 Pre-rig Truss** is designed with the **ALPHA connectors** that allow for easy attachment of various accessories, including lifting eyes, clamps, brackets, curtain tracks, trolley beams, braces, and machinery. This gives you the flexibility to add the fixtures and equipment that you need for your specific event.

To make installation even more effortless, we offer a foldable dolly that can be used to transport and set up the **ALPHA82 Pre-rig Truss**. The dolly is compact and easy to maneuver, making it ideal for events with tight deadlines or limited setup time.

AMTS Pre-Rig ladder 240cm 2
182011 14.5kg



AMTS connector Pre rig 4
181005 2.5kg




AMTS middle tube 50x4 240cm 1
183029 4.32kg




AMTS Pre-rig cross tube 60mm 2
183026 1.4kg



AMTS Pre-Rig Dolly 240cm 1
183025 27.5kg

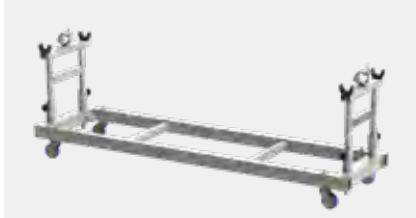

AMTS Pre-rig Stacker 2
183030 1.5kg

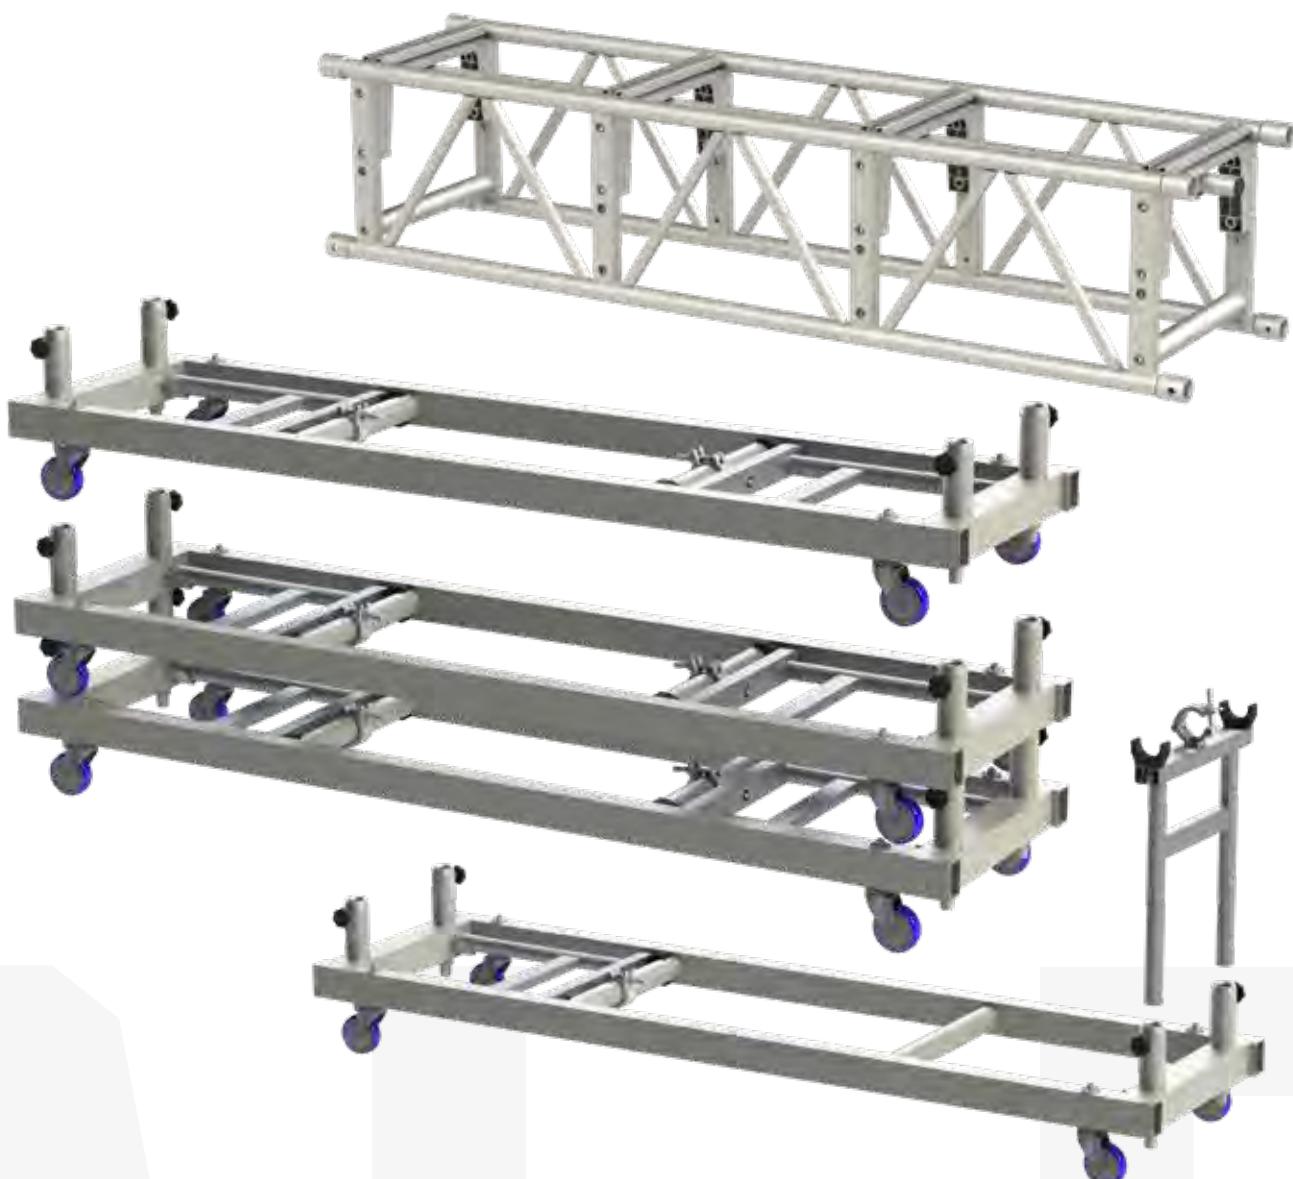




SIXTY82



Tower Model M	60
V-Tower Model M	62
Tower Model L	64
Tower Model XL	66
Multibase Tower	68

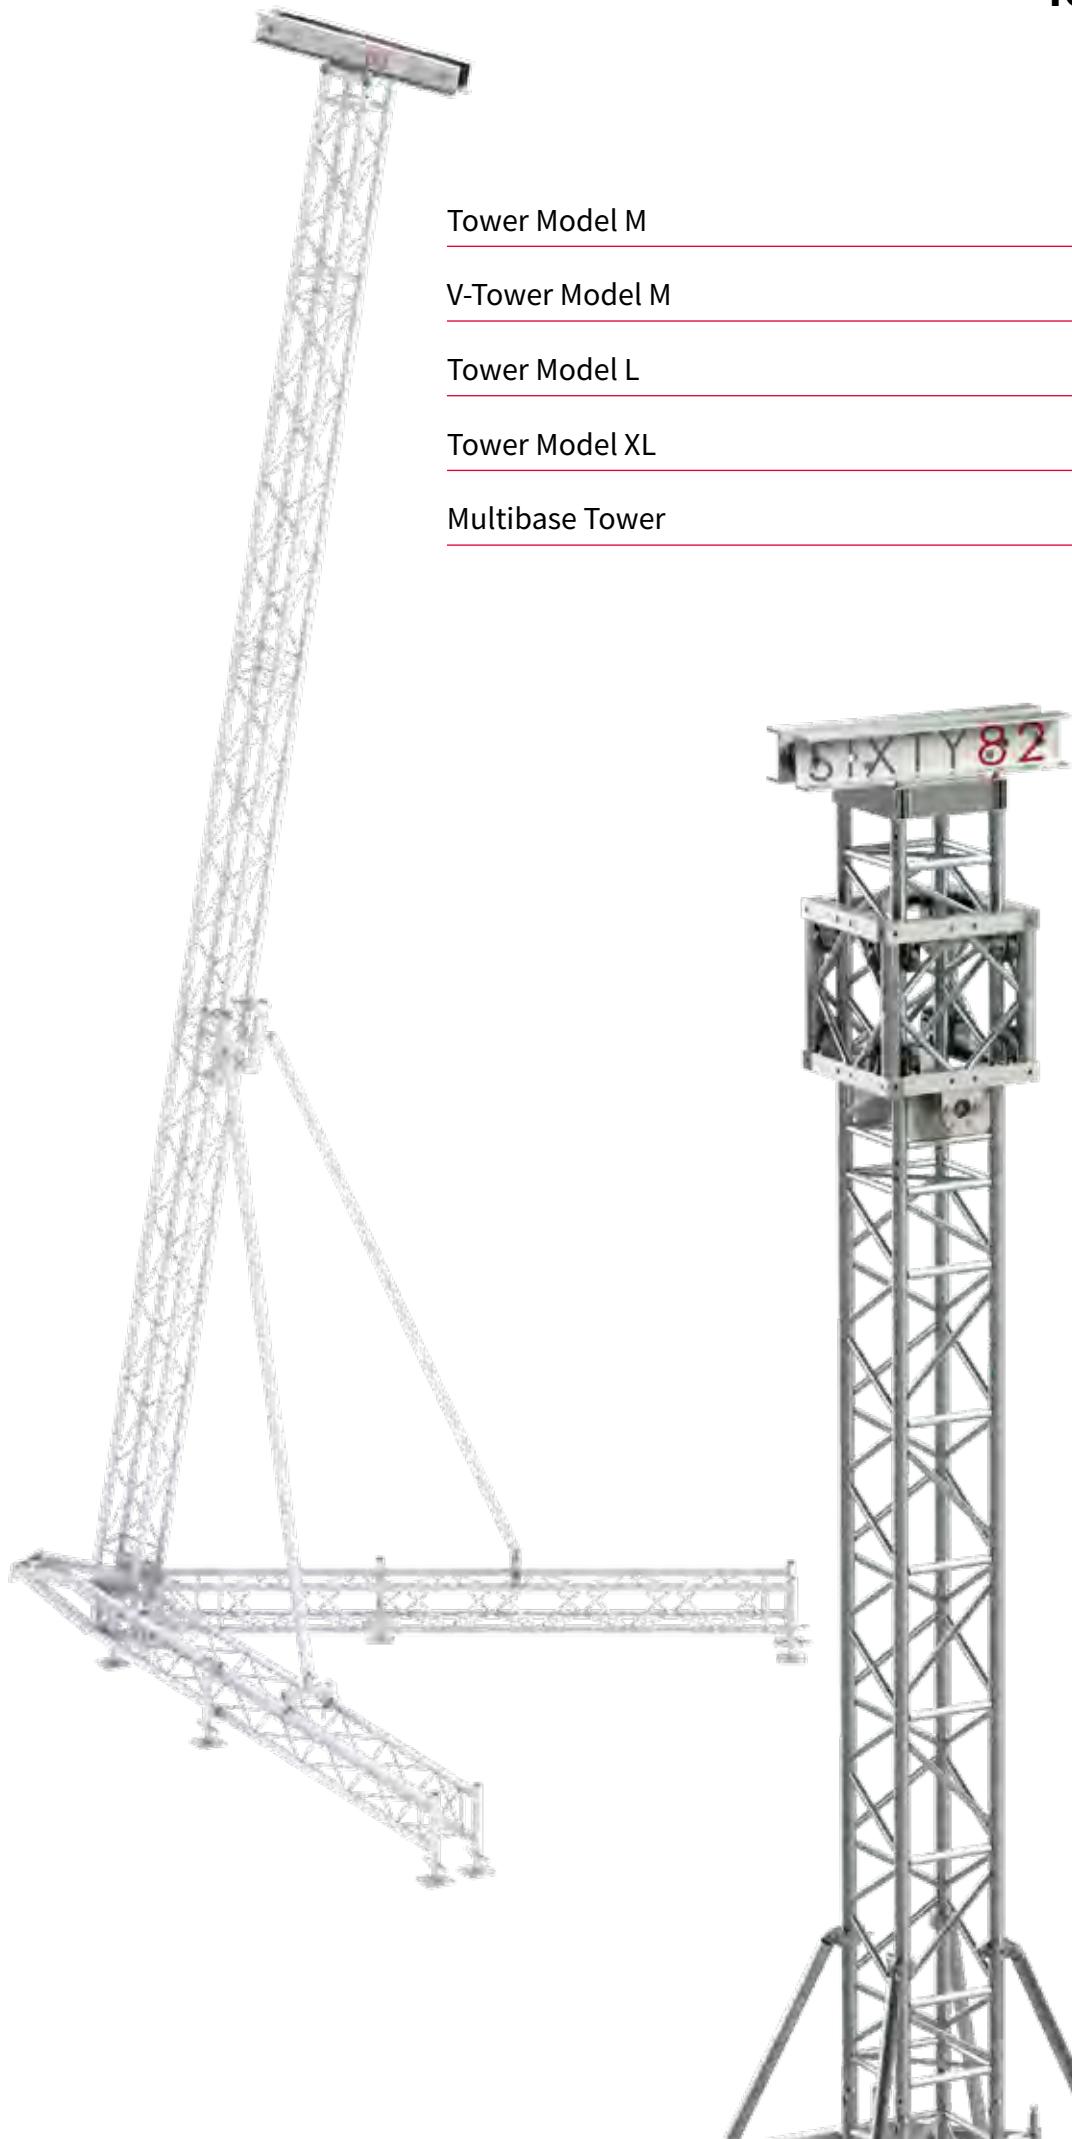




Tower Model M

HOW TO?

UNDERSTANDING TOWER LOADING

The following variables determine the allowable tower loading:








- Tower length
- Tower cross sectional dimensions
- Dimension of chords
- Method of restraining top and bottom of the tower
- Use of guy wires
- If the tower base is ballasted

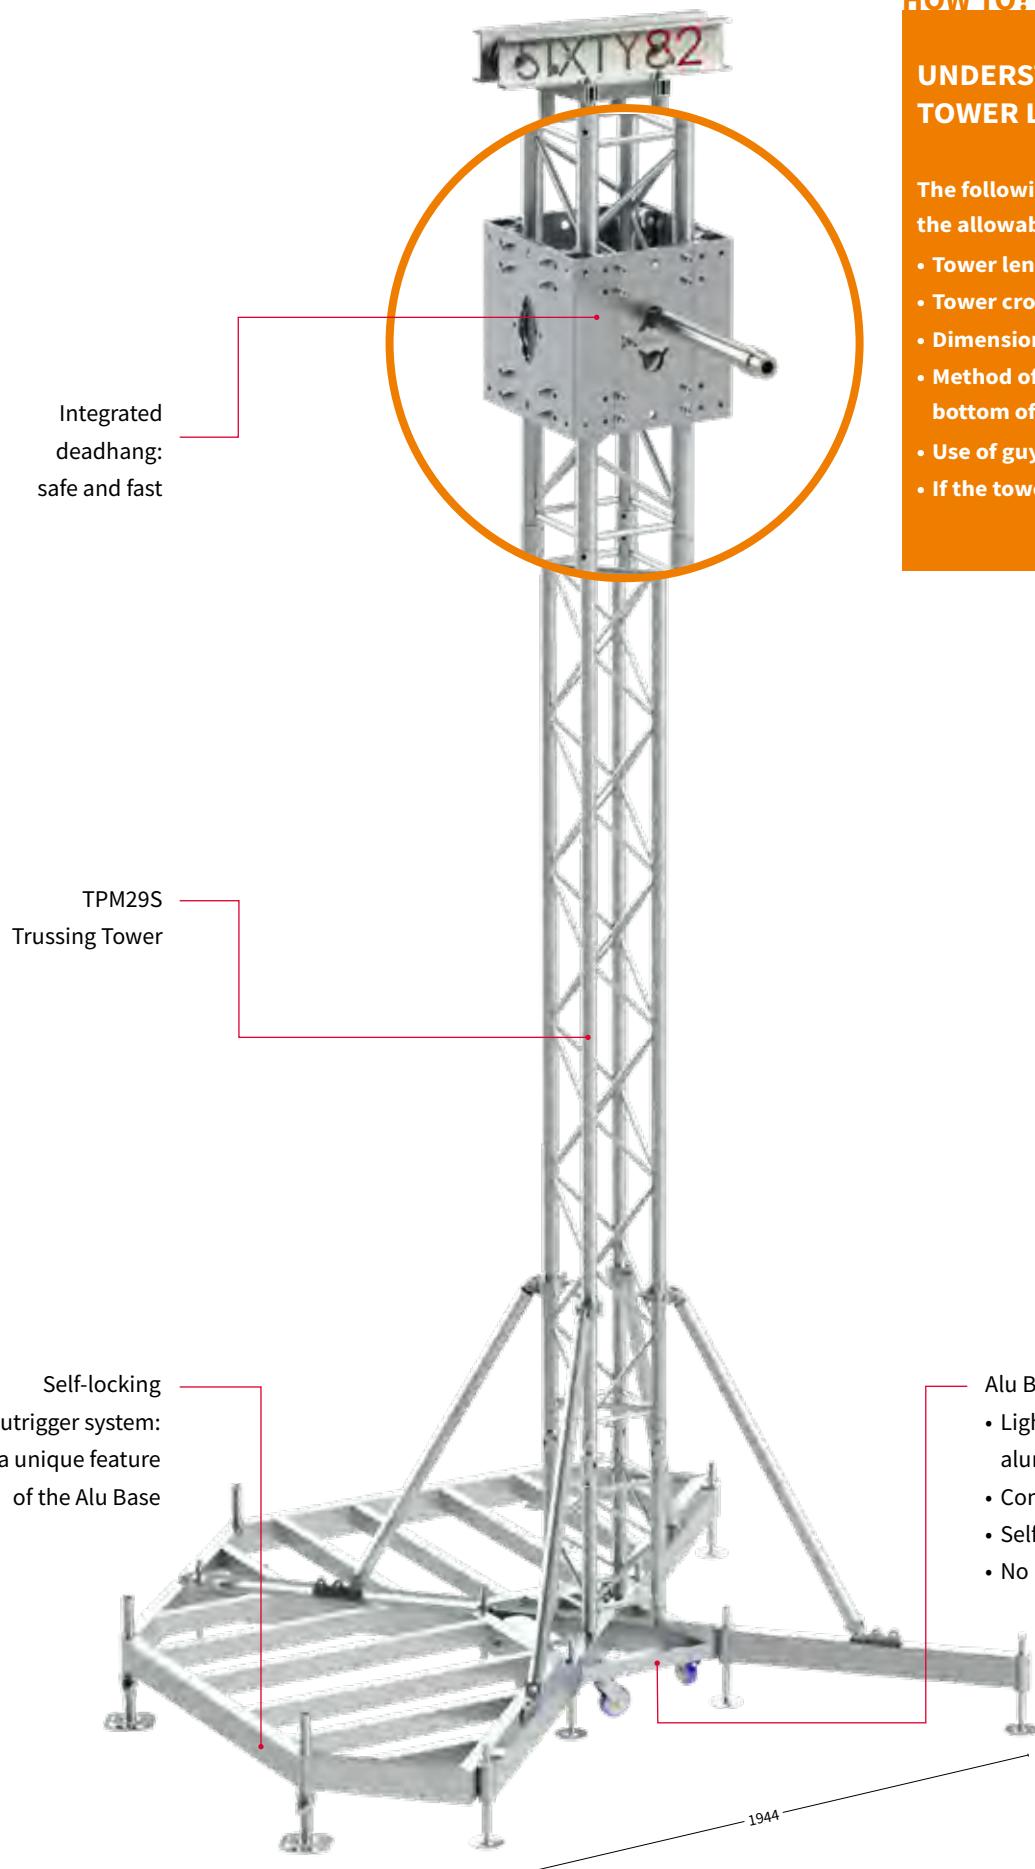




WHY SLEEVE BLOCK PLATED?

- Completely bolted to avoid weakening due to welding
- Lighter weight due to use of special alloys
- Integrated deadhang system
- Deadhang system restrains the sleeve block in 2 directions, therefore optimised for roof systems
- Radiused edges for ease of handling

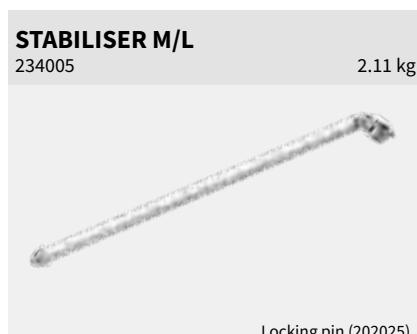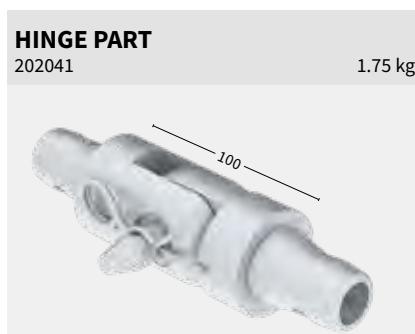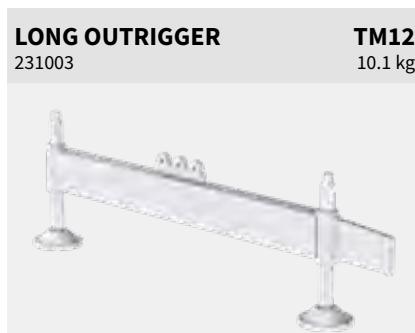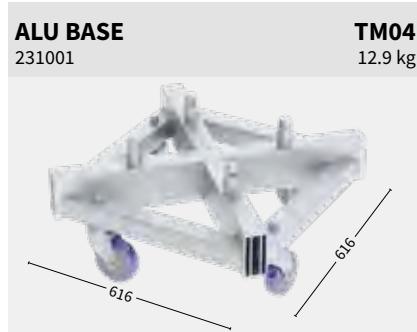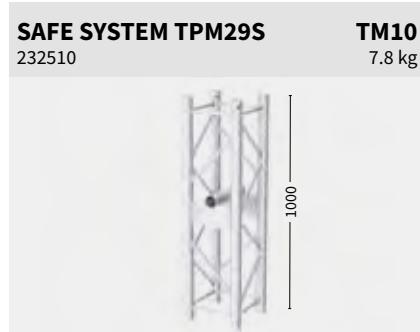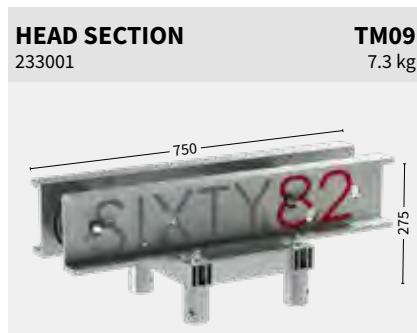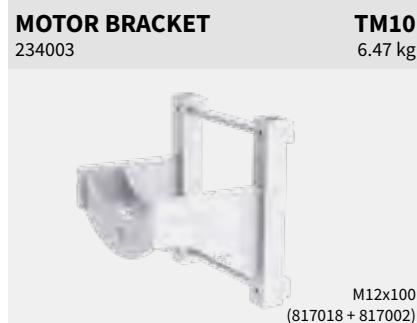



V-Tower Model M

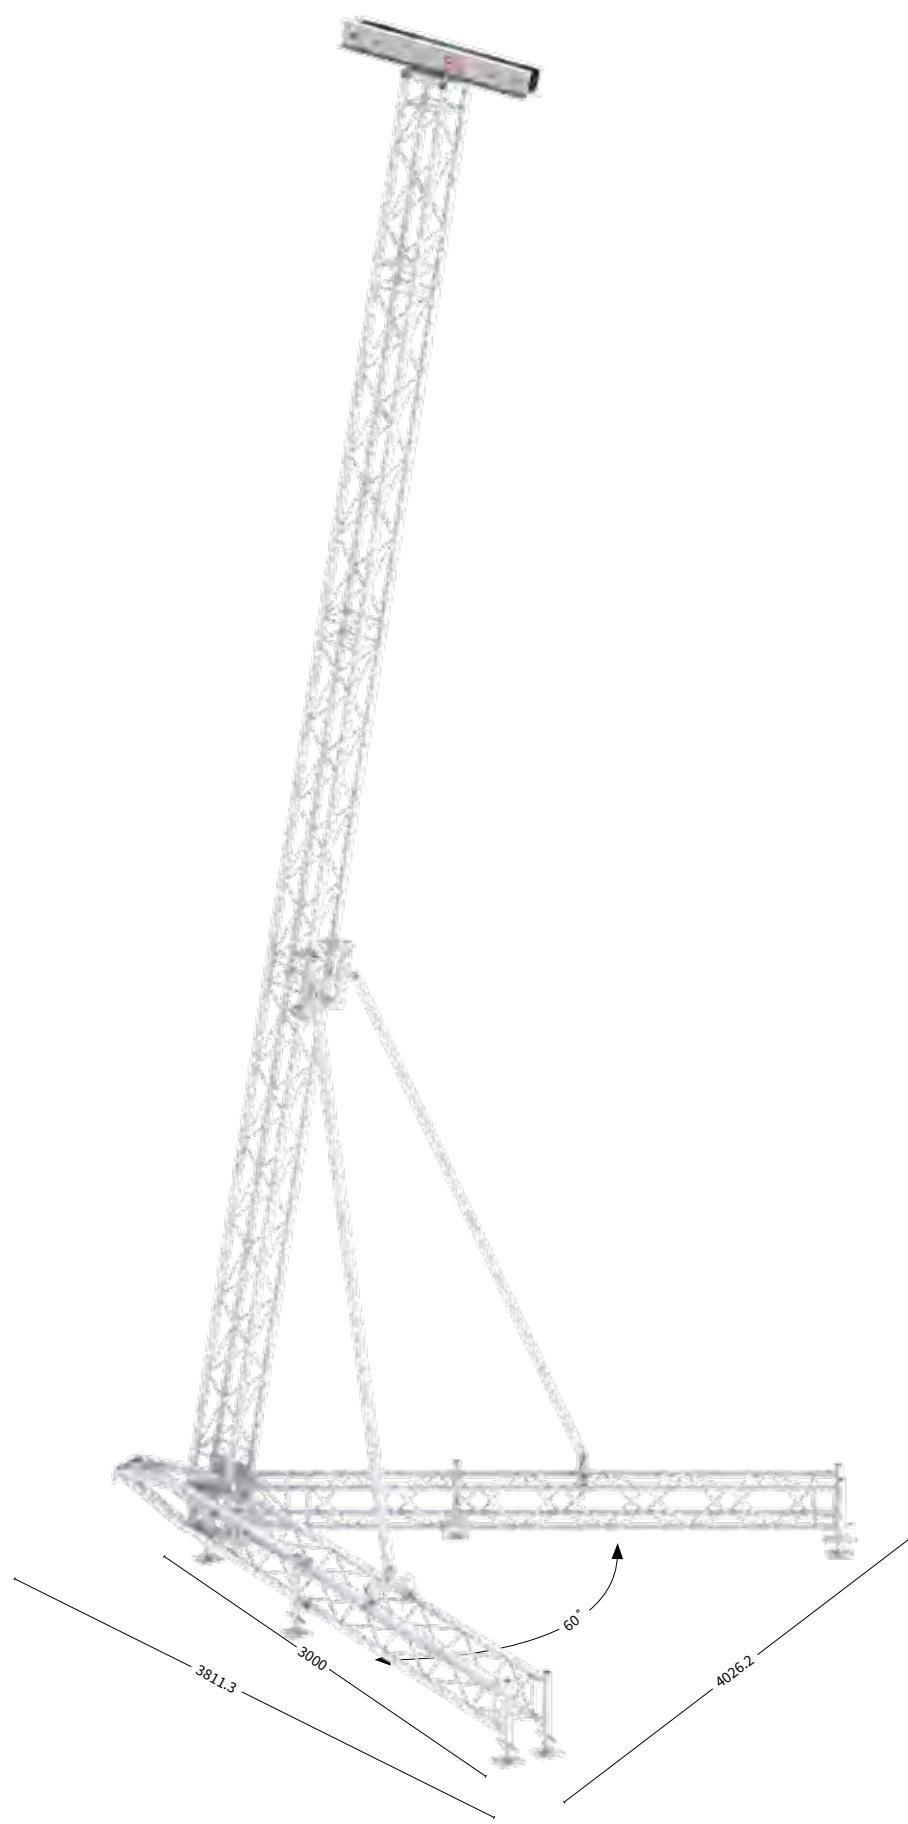

WHY V TOWER MODEL M?

- Self-Standing tower system to hang PA systems
- Minimal ballast required due to its shape
- Faster to build, compared to similar systems
- Complies with latest EN13814 standard for temporary structures
- Small footprint
- Use of standard M29S trusses
- Lifting help available

Technical specifications

- Max load 800 kg H = 750 cm
- Front surface 250 cm²
- Side surface 125 cm²
- Stabilizing profile
50 x 50 x 4 x 4 reinforced
- Max windspeed in service 20 m/s

VT CORNER TPM29S

631502

22.5 kg



VT HEAD SECTION M29S

631003



16.5 kg






Parts


631002	1 VT corner M29S
631003	2 Head section VTM09
631006	3 VT Stabiliser M29S
631008	4 VT Stabiliser adapter
202020	5 Hinge pin M
817008	6 Bolt M12x025 low head
202008	7 Half connector M52S
202018	8 Hinge female
251002	9 Scaff spindle adapter M29 clamp
251010	10 Scaff spindle adapter M29 receiver
203005	11 R-spring L05
631005	12 VT Stabiliser bracket M29S
251013	13 Scaff spindle 40 cm
128010	14 M29S-L300
128008	15 M29S-L200
128006	16 M29S-L100
631007	17 VT Erecting help

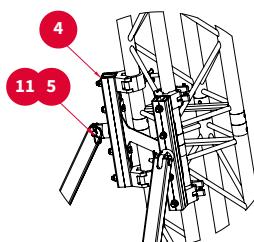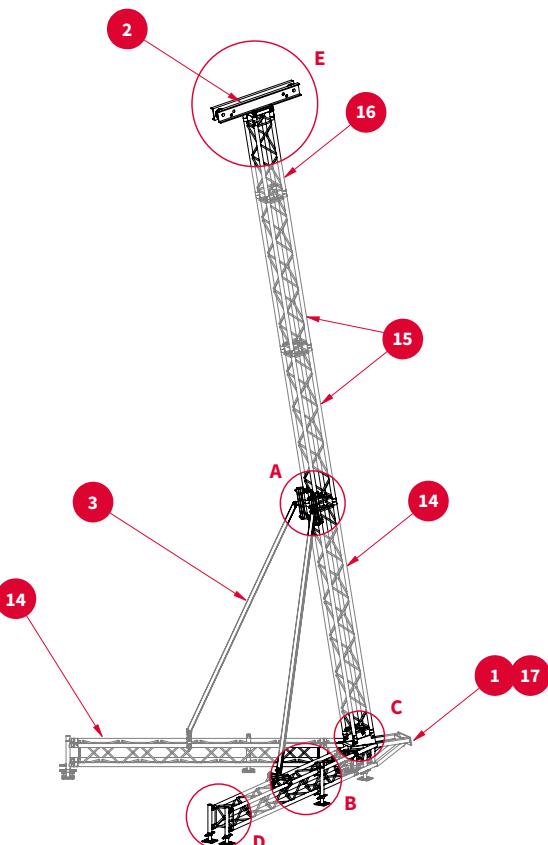


DETAIL A

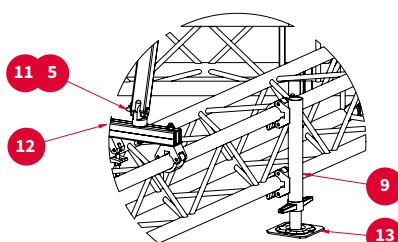

DETAIL B



DETAIL C

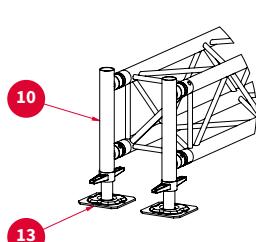

DETAIL D

VT STABILISER ADAPTER

631004

6.8 kg



VT STABILISER BRACKET M29S

631005

2.5 kg



VT STABILISER M29S

631006

9 kg



VT ERECTING HELP M


631007

14.5 kg




SCAFF SPINDLE ADAPTER CLAMP

251002

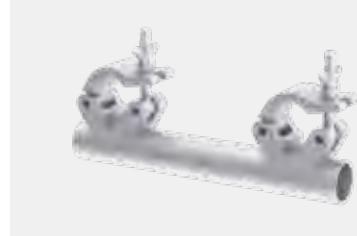


SCAFF SPINDLE ADAPTER RECEIVER

251010

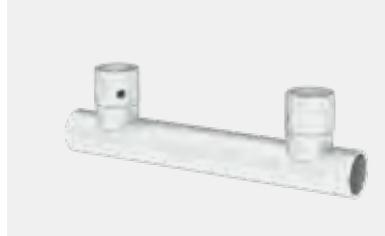



Tower Model L

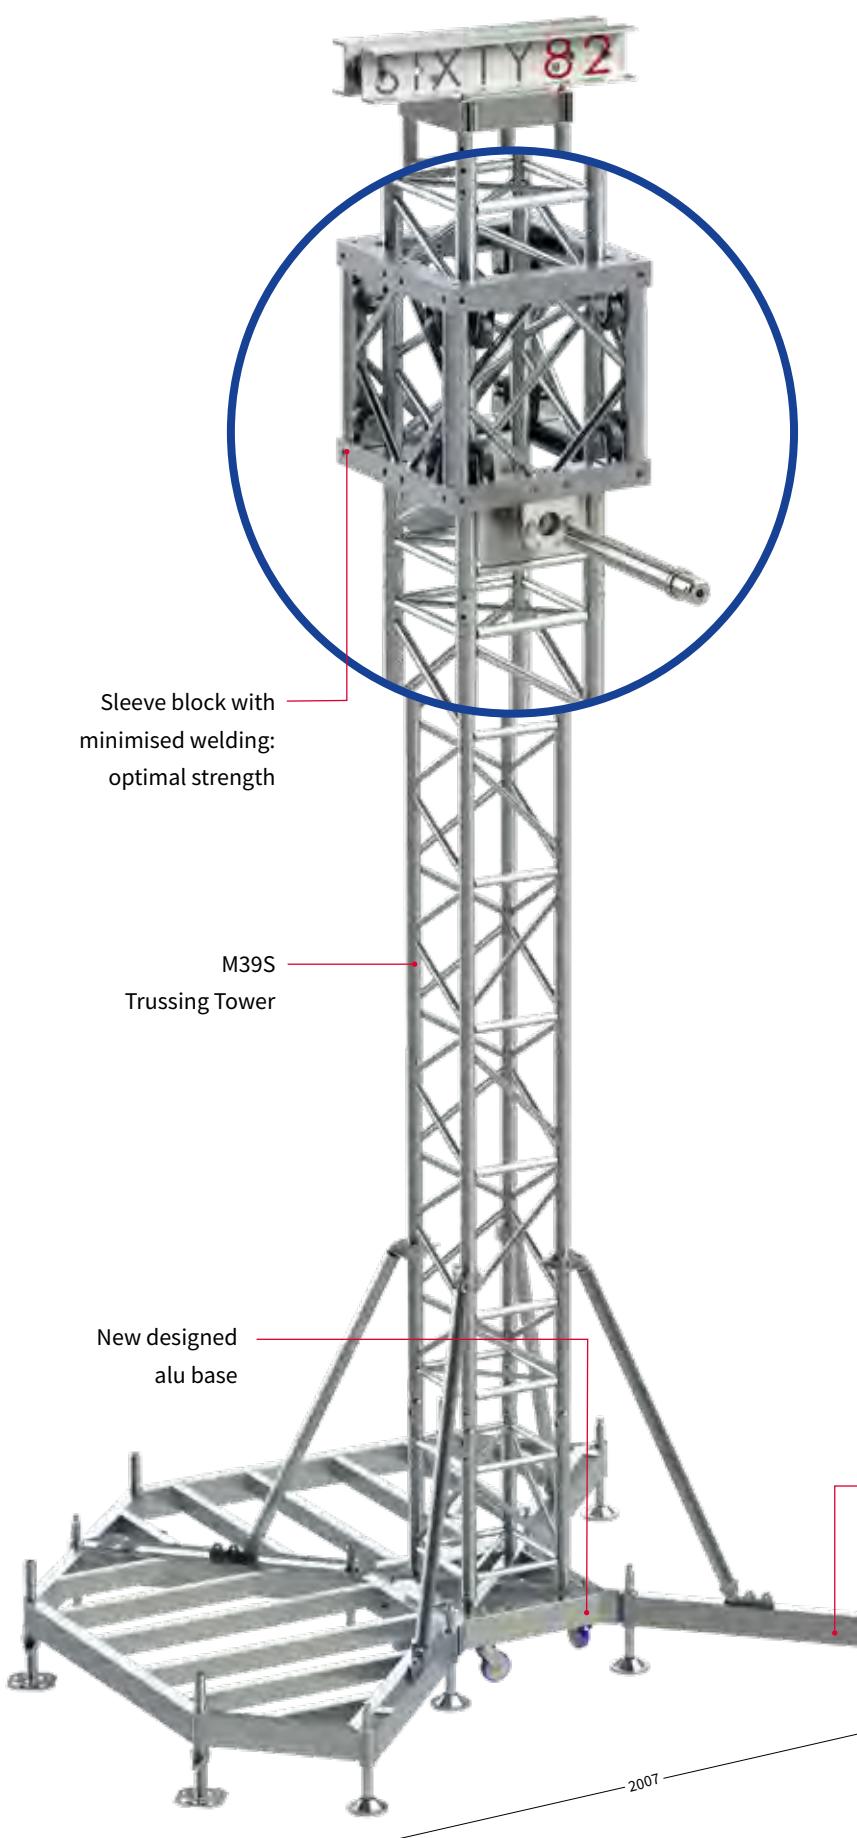

WHY TOWER MODEL L?


- Light weight sleeve block with minimised welding for optimal strength
- Modular concept allowing multiple configurations
- Tower truss with integrated ladder and diagonal bracing on all sides for optimum strength
- Slim design, less bulky footprint
- Sleeve blocks available for all kind of horizontal truss spans

SLEEVE BLOCK L52S

232004

TL10

40 kg

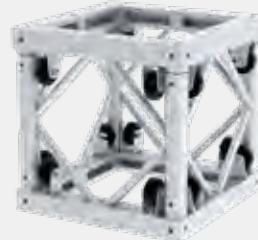


SLEEVE BLOCK XL101R-F

232005





TL10

57.5 kg



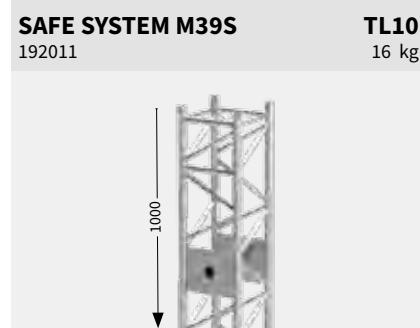


	Code	Length
192001		50 cm
192002		100 cm
192003		150 cm
192004		200 cm
192005		250 cm
192006		300 cm
192007		350 cm
192008		400 cm

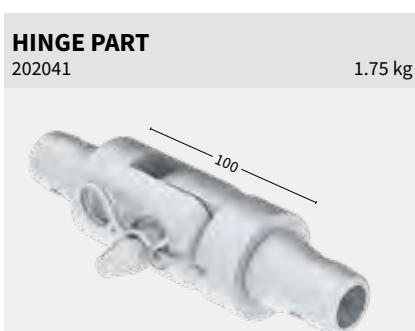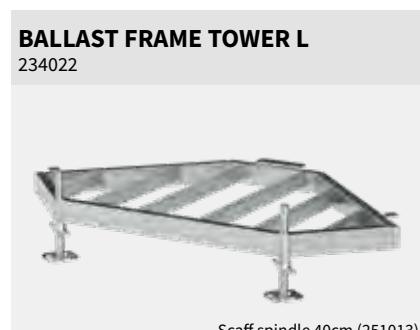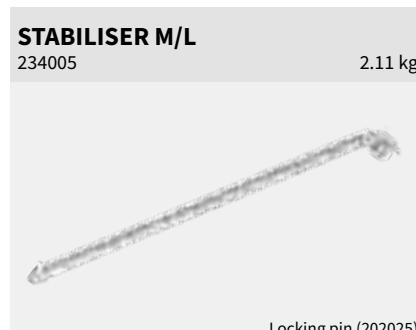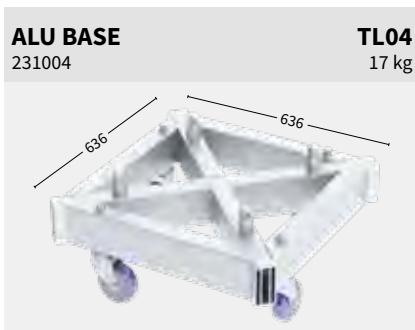




Tower Model XL

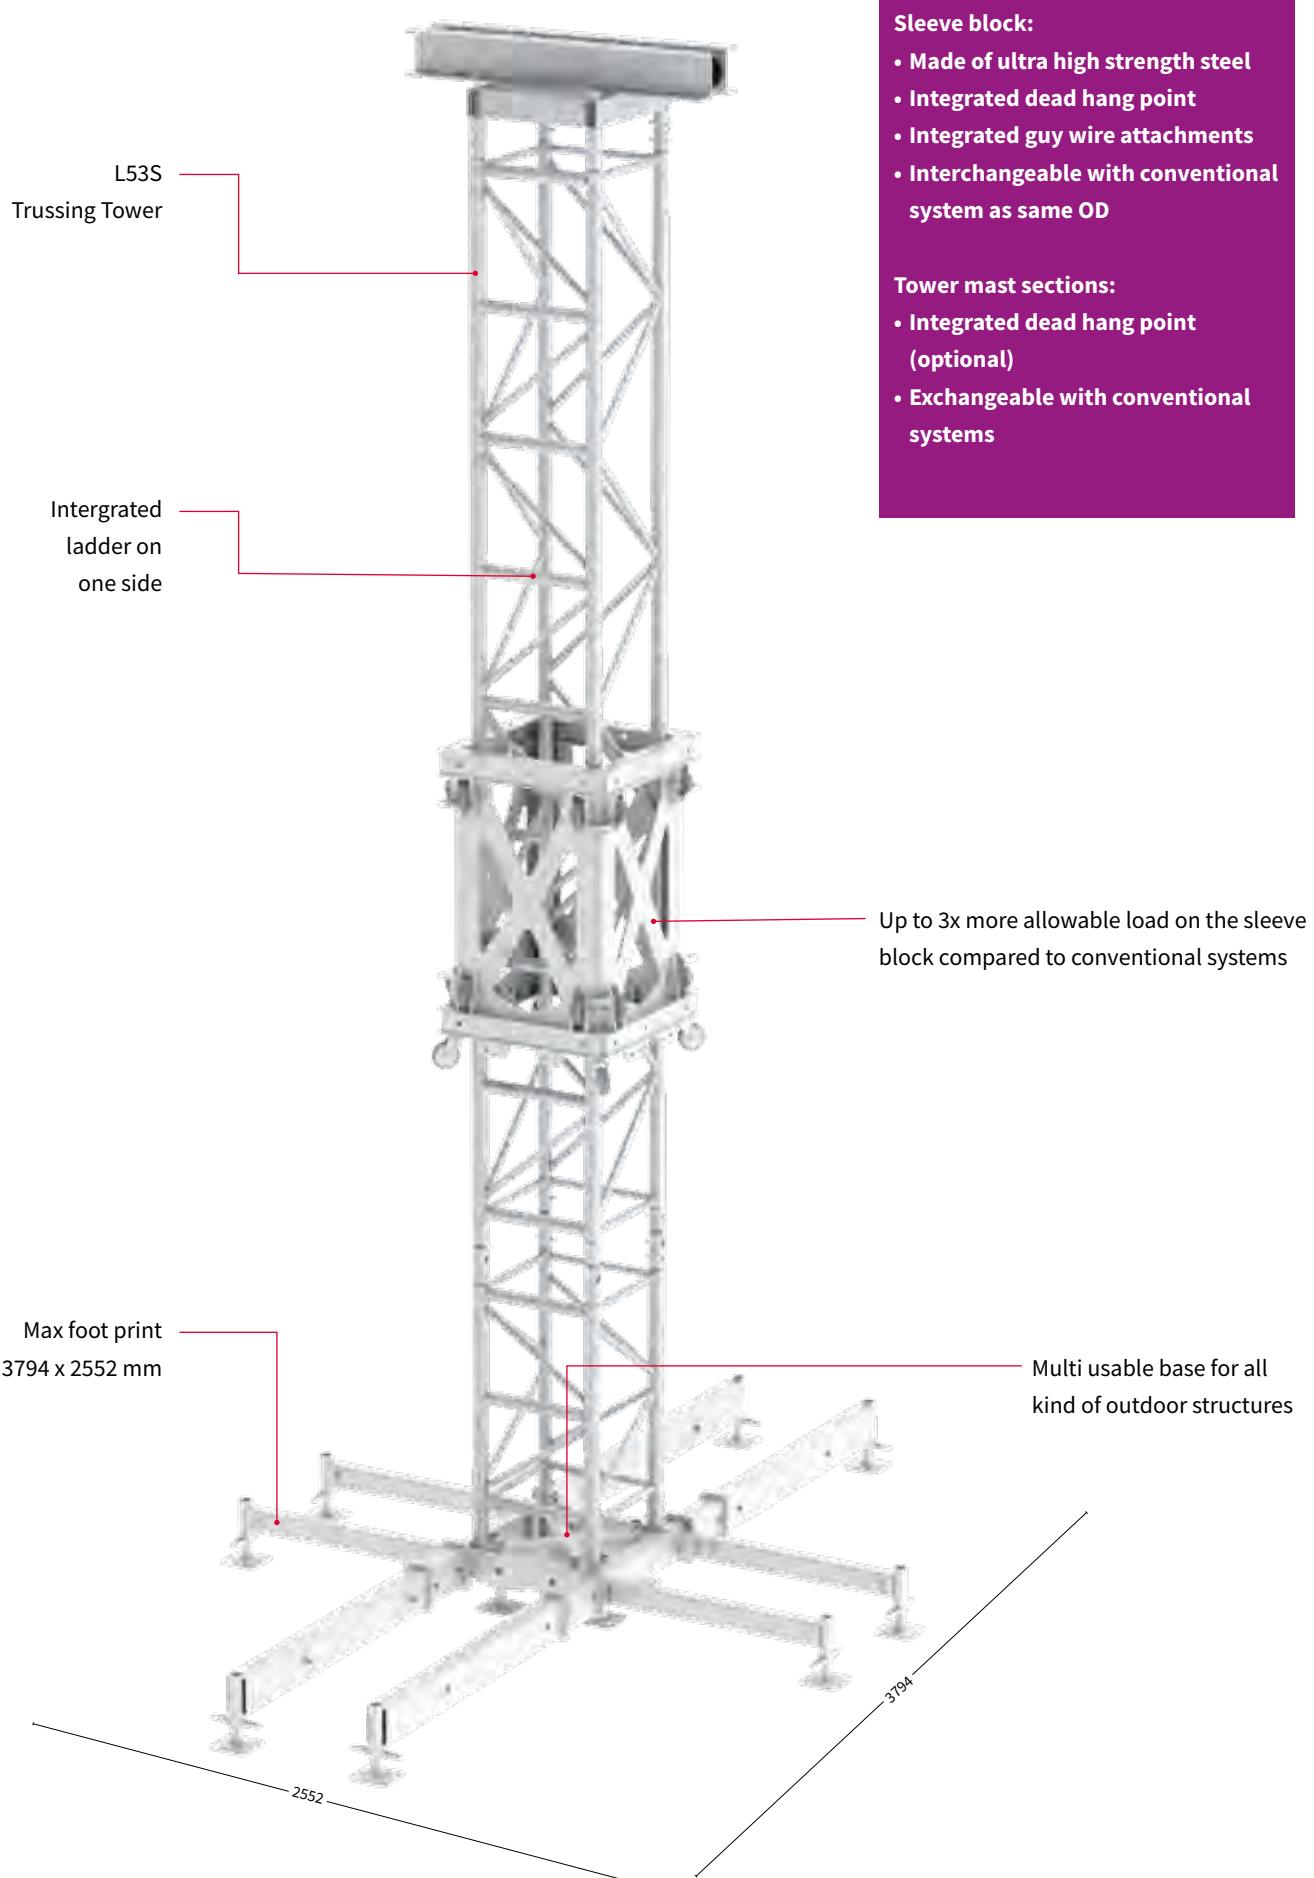




SLEEVE BLOCK XL101R-F
232008

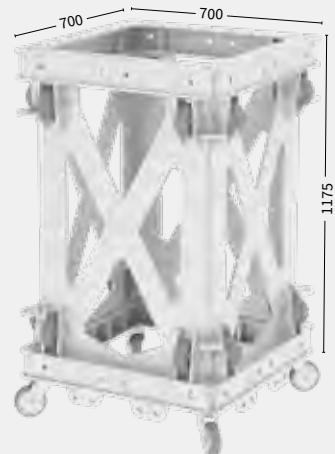

TXL10
230 kg


SLEEVE BLOCK XL101F-R/L52S
232009

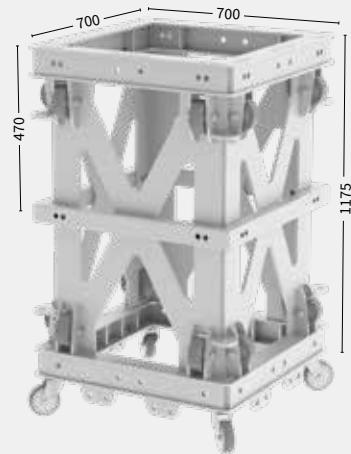

TXL10


HEAD SECTION
233003

TXL09

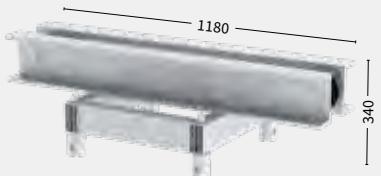

HORSE SHOE
232016

TXL10

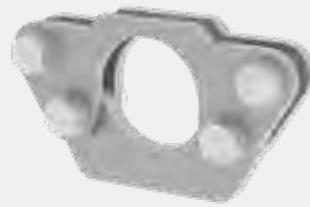


SAFE PIN XL53S
232017

TXL10



XL53TOW
Code Length

193001	50 cm
193002	100 cm
193003	200 cm
193004	300 cm
193005	400 cm

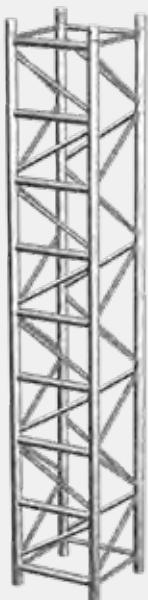


SAFE SYSTEM XL53S
193007

TXL10





Multibase Tower

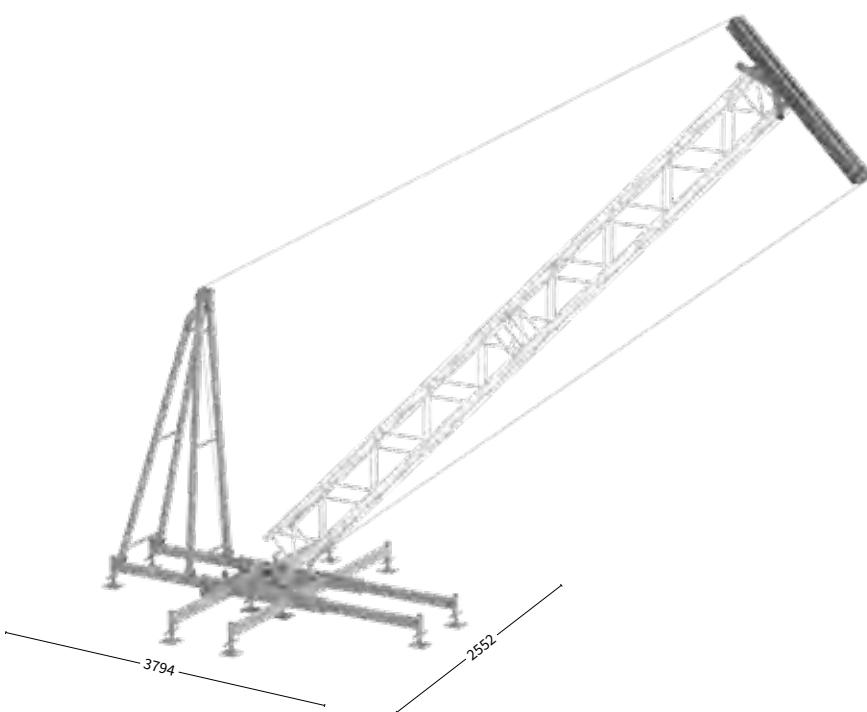

WHY MULTIBASE TOWER?

- Multi usable base for all kind of outdoor structures
- Self erecting by means of chain hoist
- Adapts to many different truss types
- Calculated and proven concept
- Can be used in conjunction with roof systems
- One size fits all head section
- Optional truss head
- Head section comes with multiple suspension points
- Calculated for coastal area (WS4) in Germany

MT BASE UNIT
231010



MT OUTRIGGER M
231012




MT OUTRIGGER L
231013



MT ERECTING SYSTEM
234012



MT HOIST BRACKET
234013

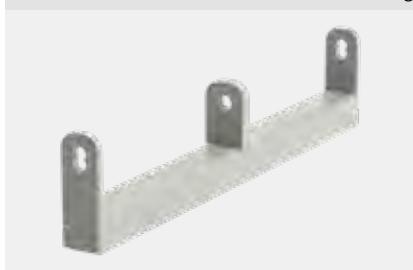

MT HEAD SECTION
233005



MT CROSS
233006



SCAFF SPINDLE 20 CM
251012



L-PIN 16-135
811008





PA Tower	truss type	tower truss	Max. Pay Load	Front dimensions	Side dimensions	Ballast front	Ballast back	Ballast side	Ballast total	Ballast during erection
V1	L52S	10 m	1000 kg	6 m ²	3.4 m ²	-	1000 kg	2 x 1000 kg	3000 kg	2 x 500 kg (side)
V2	L52S	10 m	1000 kg	6 m ²	3.4 m ²	-	400 kg	2 x 1000 kg	2400 kg	2 x 500 kg (side)
V3	L52S	10 m	800 kg	5 m ²	3.4 m ²	-		2 x 1000 kg	2000 kg	2 x 500 kg (side)
V4	L52S	10 m	600 kg	4 m ²	3.4 m ²	-		2 x 900 kg*	1800 kg	2 x 500 kg (side)
V5	L52S	10 m	400 kg	3 m ²	2 m ²	-		2 x 400 kg*	1600 kg	2 x 500 kg (side)
V6	L35S	8 m	800 kg	3.5 m ²	2 m ²	300 kg**	400 kg	-	700 kg	400 kg (back)
V7	M39S / M39TOW	8 m	600 kg	3 m ²	2 m ²	200 kg**	400 kg	-	600 kg	400 kg (back)
V8	M29S	6 m	500 kg	3 m ²	2 m ²	200 kg**	200 kg	-	400 kg	400 kg (back)
Tech Tower										
V9	L35S / M39S / M39TOW	8 m	4 x 150 kg	4 x 1 m ²	4 x 1 m ²	-	-	2 x 600 kg	1200 kg	
V10	M29S	6.5 m	4 x 150 kg	4 x 1 m ²	4 x 1 m ²	-	-	2 x 400 kg	800 kg	
LED Portal										
						Every base				
V11	L52S	8 m incl. corner	LED 2000 kg PA 2 x 600 kg	LED 28 m ² PA 2 x 4 m ²	-	1000 kg	1000 kg	2 x 600 kg**	3200 kg	600 kg (back) or 2 x 500 kg side
V12	L35S	7 m incl. corner	LED 1000 kg PA 2 x 600 kg	LED 19.25 m ² PA 2 x 2.5 m ²	-	400 kg	400 kg	2 x 500 kg**	2200 kg	600 kg (back) or 2 x 500 kg side
V13	M39TOW / L52S	7 m incl. corner	LED 1000 kg PA 2 x 600 kg	LED 17 m ² PA 2 x 1.5 m ²	-	400 kg	400 kg	2 x 500 kg**	2200 kg	600 kg (back) or 2 x 500 kg side

* 50% of the payload may be subtracted proportionally from the ballast.

** The payload may be subtracted proportionally from the ballast.



Scan the QR-Code


to watch the Multibase Tower technical video







Arc Roof 6 x 4	74
Arc Roof 8 x 6	75
Arc Roof 10 x 8	75
Sloping Roof 6 x 4	78
Saddle roof 12 x 10	80
Saddle roof 10 x 8	84
Pitched Roof 14 x 12	86

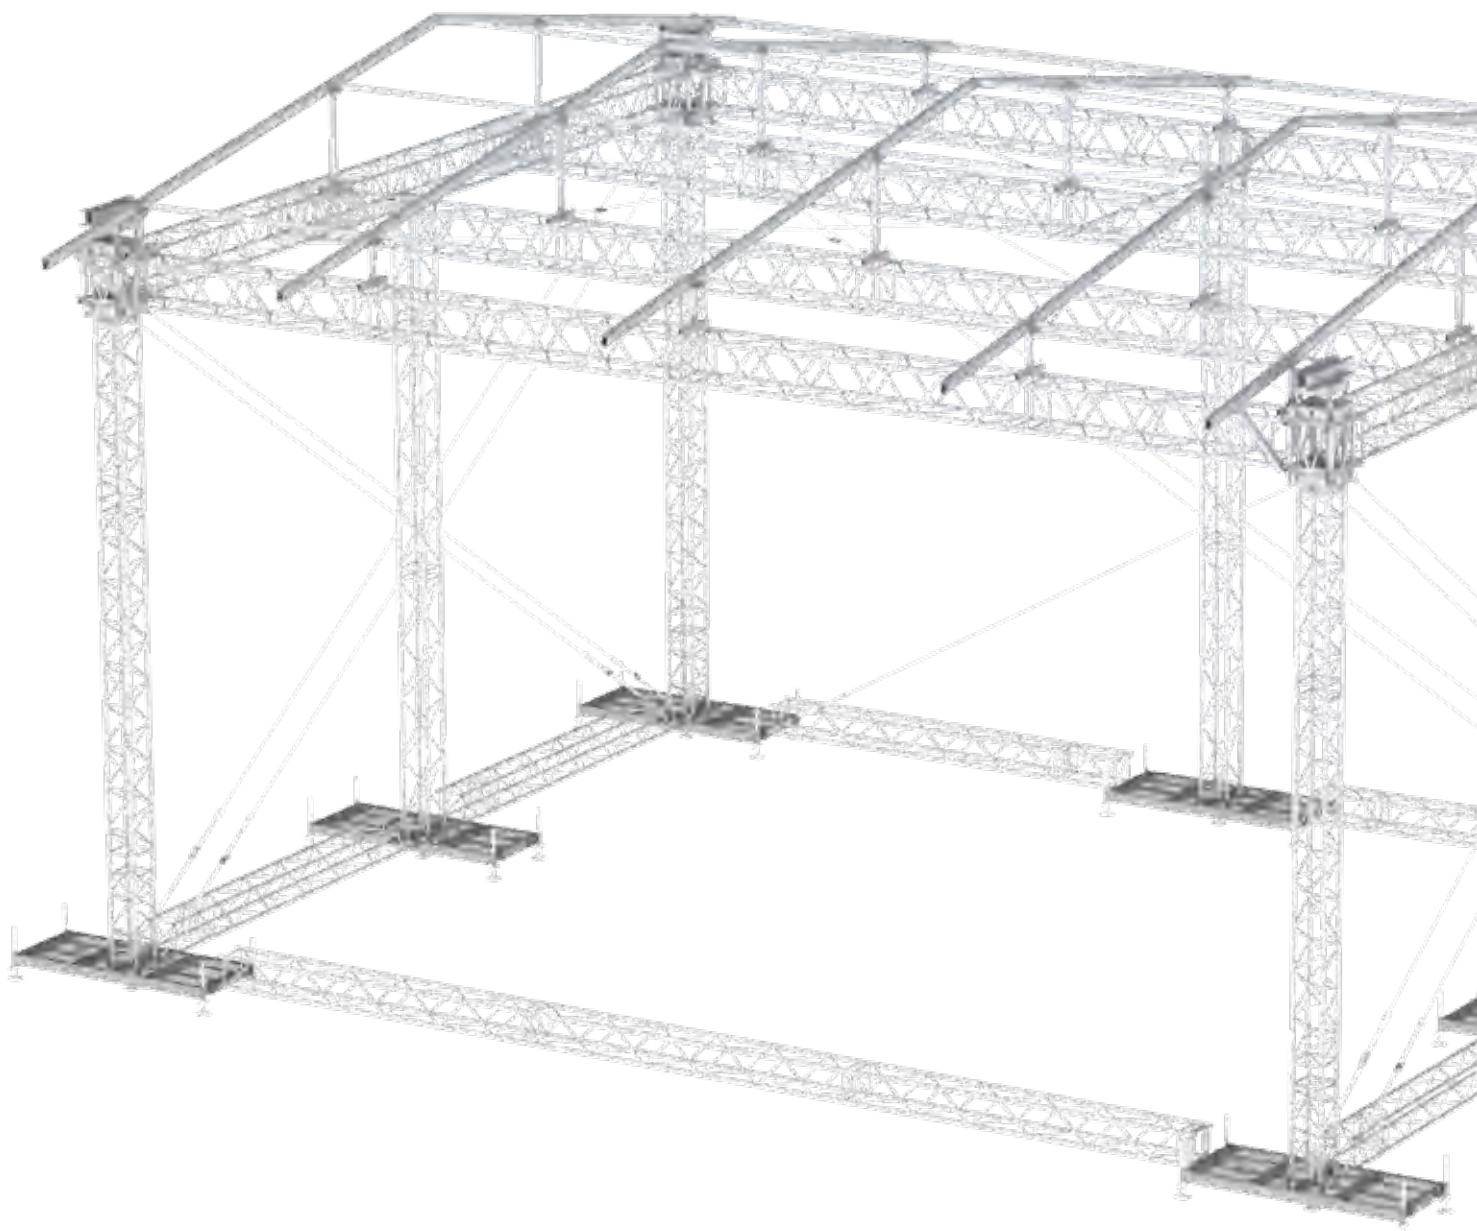



WHY ARC ROOF?

- **Versatile temporary roof structure based on standard trusses**
- **No obstructing guy wires in sides**
- **Bespoke corners can be combined with Model M tower sleeve**
- **Competitively priced**
- **High loading compared to size**
- **Easy set-up by hand or material lifts**
- **Structurally calculated and proven concept**
- **Full aluminium structure**
- **Many options for staging or substructure**
- **Complies with European standards for temporary structures**

	6 x 4 meter *	8 x 6 meter*	10 x 8 meter*
Loading capacity UDL	2100 kg	2441 kg	2502 kg
Loading capacity front cantilever		2 x 250 kg	
Self weight incl. wall canopies	610 kg	682 kg	1282 kg
Max peak gust wind speed in-service		20 m/s (measured at 10 m height)	
Max peak gust wind speed out-of-service		28 m/s	
Max peak gust wind during erecting		10 m/s	
Ballast		Depends on configuration	
Dimensions structure		See drawings	
Dimensions inside for stage platform	6 x 4 m	8 x 6 m	10 x 8 m
Trusses		M29S / M29T	
Canopy		Standard: grey/ black Optional: transparent Optional: other colors	
Staging	Several options possible like aluminium scaffolding system Subframe B		
Structural calculations	EN 13814 / Euro codes		
Miscellaneous	<ul style="list-style-type: none"> • Canopies fitted in kedar profile • No guy wires in side walls • Optional side wings • Baubuch on request • Structural calculations per EN 13814 		

* All data is based on calculated set-up. Other options are possible but need to be investigated on a case-by-case basis.



WHY ARC ROOF?

Boxcorner Adapter

- Machined plated adapter.
- Zero tolerance fitting of curved parts
- Compatible for triangle and square trusses
- Mountable on standard M29S Box corner



Stabilizer Tubes

- One tube, two pins.
- Hole integrated in curved truss
- Increases building speed
- Machined part adapter.



Sleeveblock Adapter

- Interchangeable with box corner adapter.
- Zero tolerance fitting of curved parts
- Compatible for triangle and square trusses
- Mountable on standard plated sleeveblock.



Ratchet Straps



- Hole integrated in curved truss
- Increases building speed






Arc Roof


6 x 4 meter

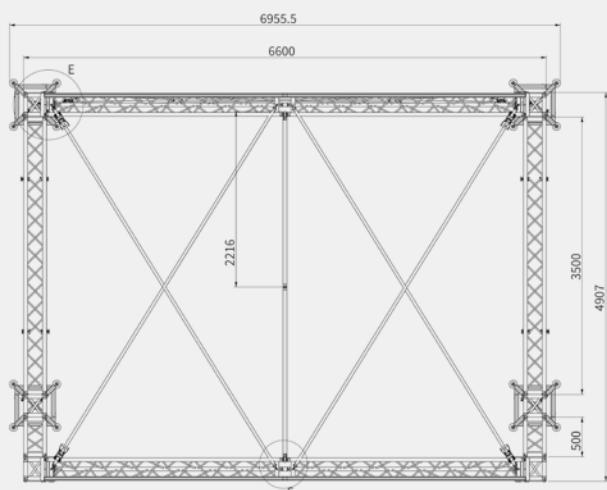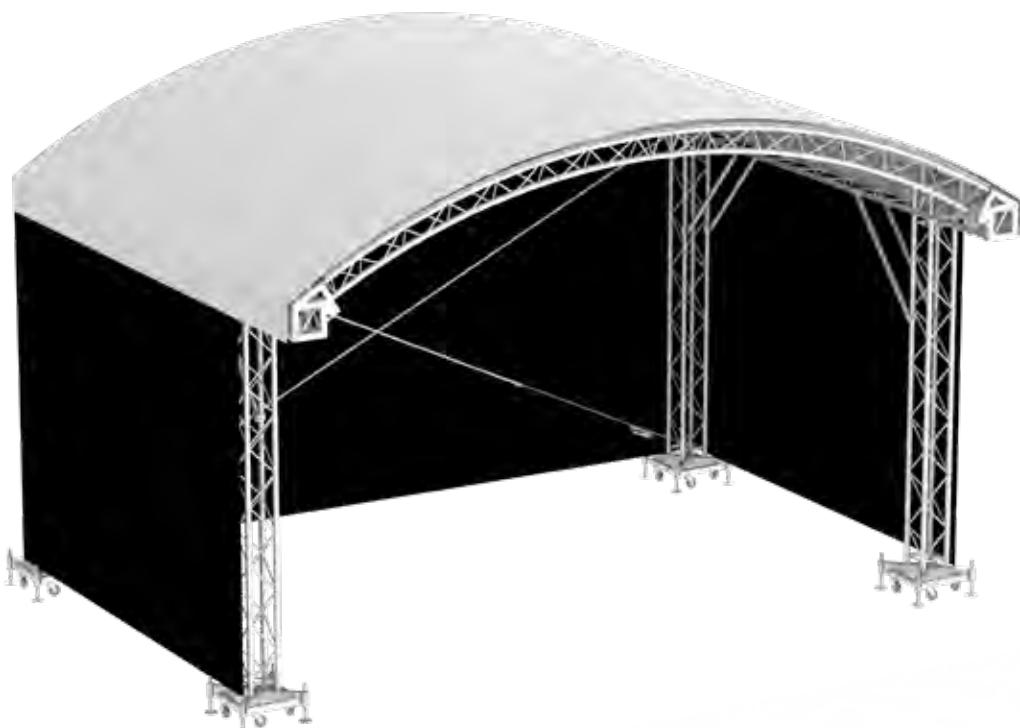


Top view

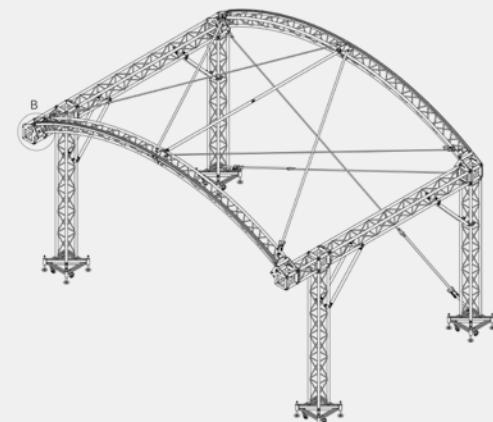

3D view

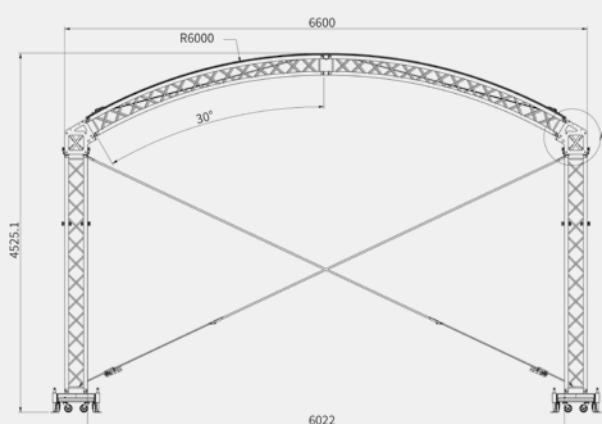



Front view

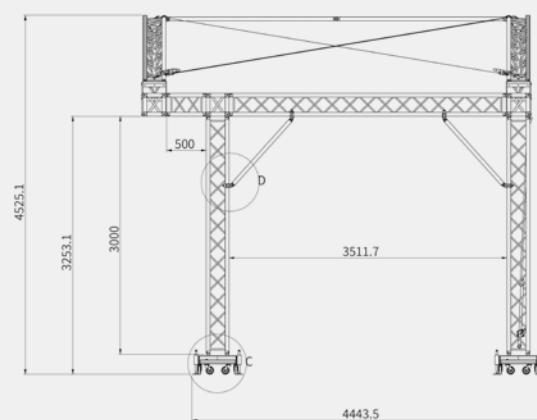


Left view

 8 x 6 meter


Arc Roof

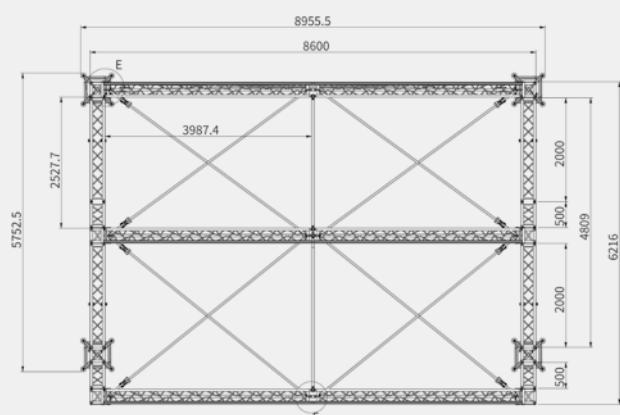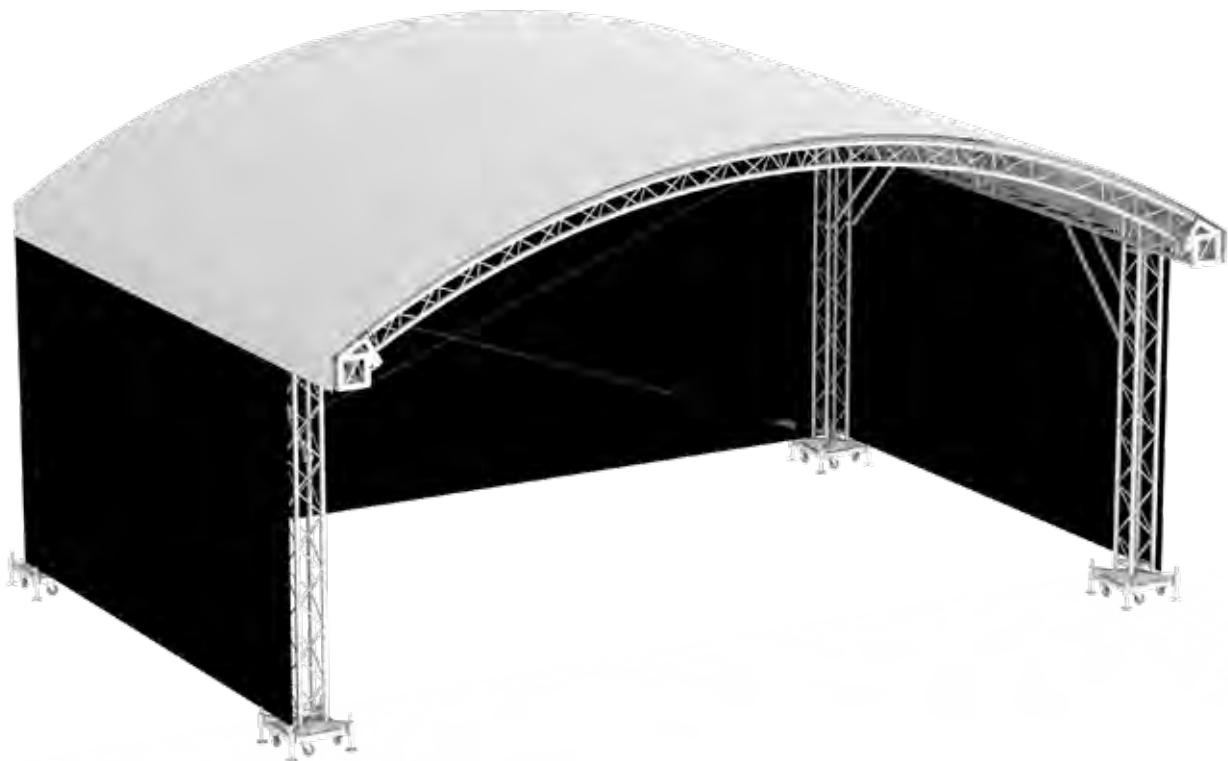


Top view

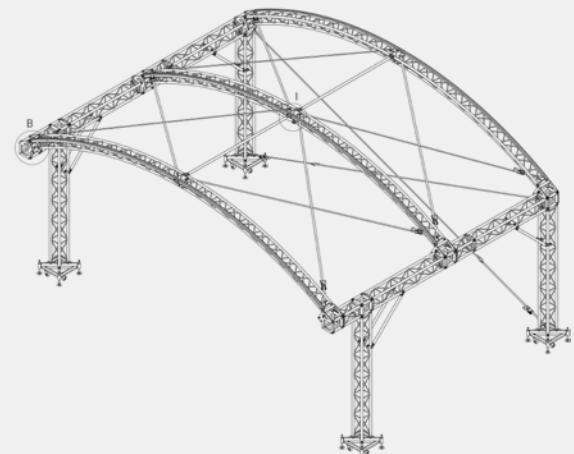

3D view

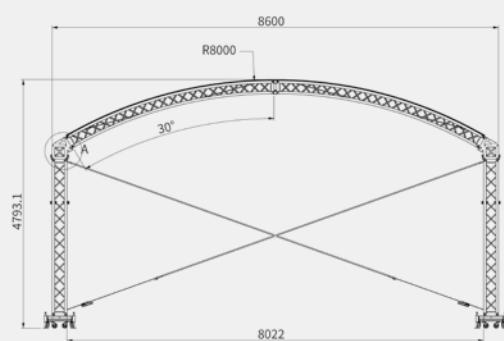

Front view


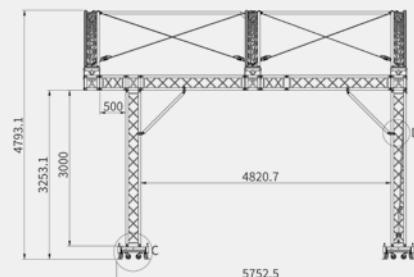


Left view




Arc Roof


10 x 8 meter

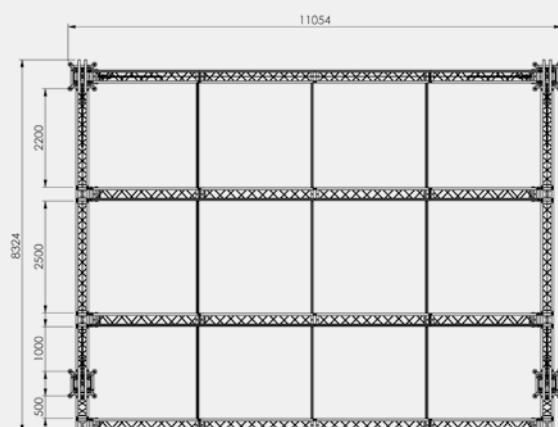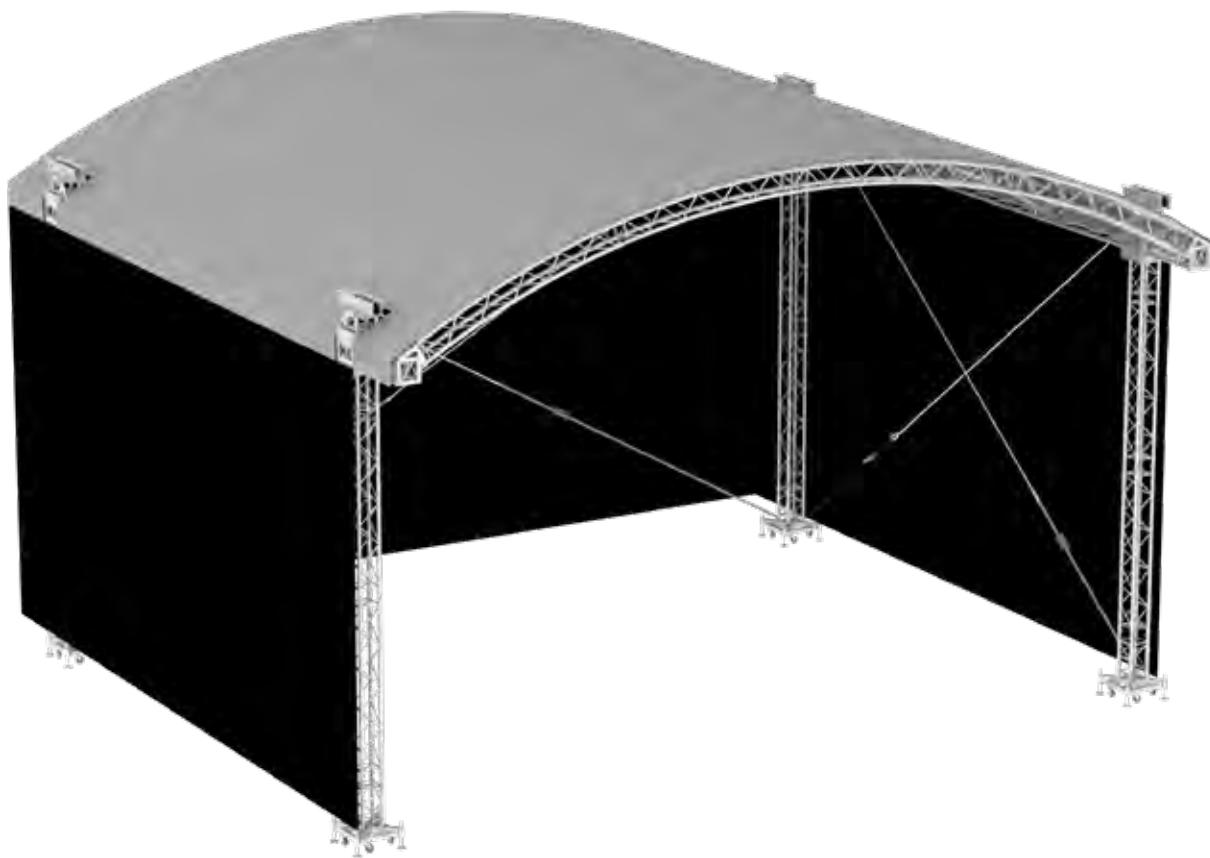


Top view

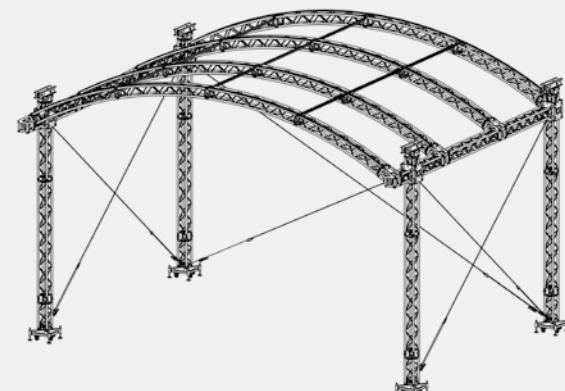

3D view

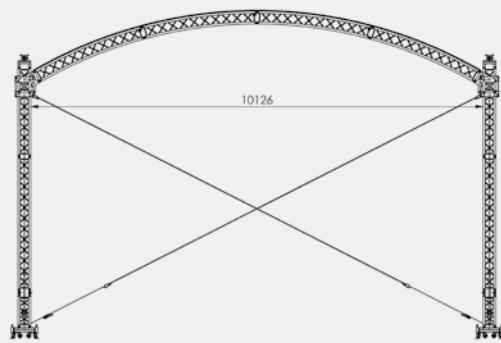

Front view

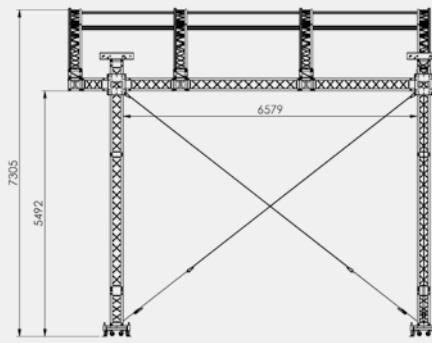

Left view





Sloping Roof

6 x 4 meter

WHY SLOPING ROOF?

- Structural reports for all building sizes available
- No “Baubuch” according German laws required due to building size below 5 m
- Short assembling and disassembling times due to conical coupler system
- Compact size, small transport size
- Maximum safety for audience, technicians and artists, all roof sizes calculated according the latest standards
- Attractive design, allows audience best possible view on the stage

Version

Type	4 x 3	6 x 4	8 x 5
Dimensions structure	4.73 x 3.66 x 4.37	6.73 x 4.63 x 4.63	8.73 x 5.31 x 4.87
Dimensions inside for stage platform	4 x 3	6 x 4	8 x 5

Max. ballast required

Model	per front tower	per back tower
4 x 3	1000 kg (850 kg)	800 kg (600 kg)
6 x 4	1250 kg (1000 kg)	1000 kg (700 kg)
8 x 5	1.450 kg (1.250 kg)	1.150 kg (850 kg)

Figures for a friction coefficient of 0.4 (steel on wood/concrete/gravel/sand)

Figures in brackets for friction coefficient 0.6 (steel on rubber/on wood/on concrete/gravel/sand)

Permanent loads can be calculated as ballast partially


Pay loads for all sizes

Loading type	Back truss	Front truss	Middle truss*
Uniformly distributed load	30 kg/m	30 kg/m	30 kg/m
Central single load	125 kg	125 kg	125 kg
Single load third points	90 kg	90 kg	90 kg
Single load fourth points	60 kg	60 kg	60 kg



* only building size 8x5

 6 x 4 meter


Sloping Roof

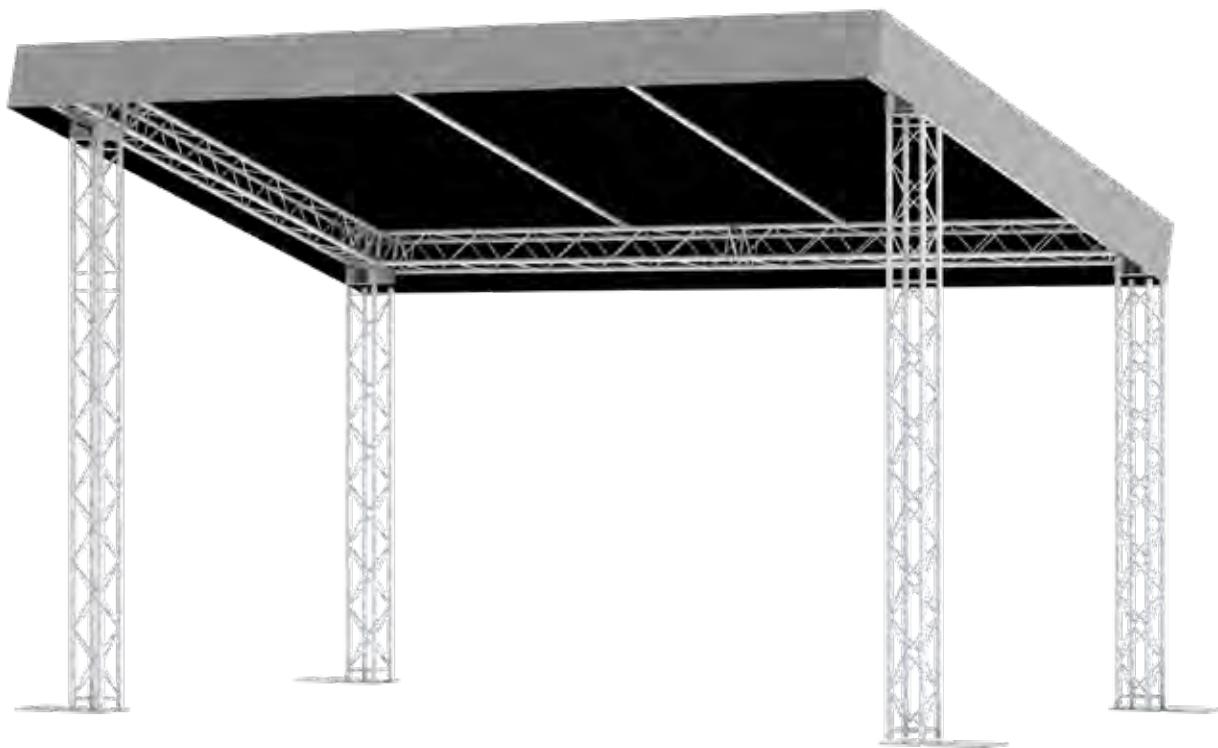

Top view

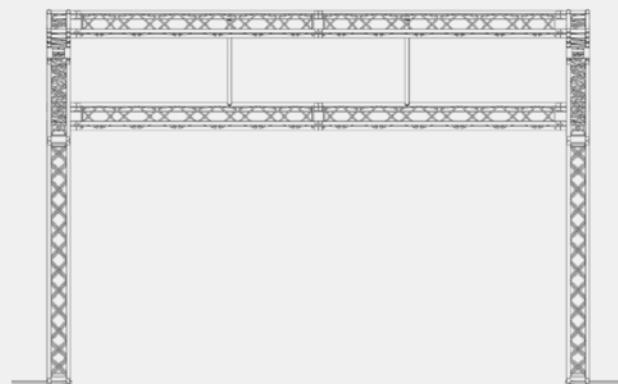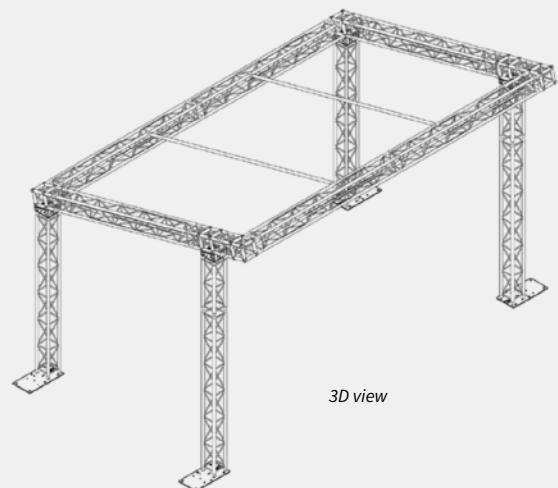

Front view

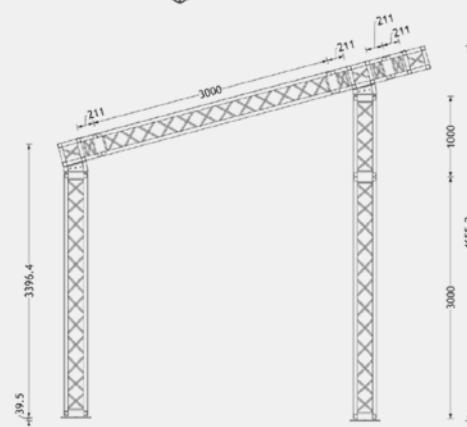


Left view



WHY SADDLE ROOF?

- Use of **boxcorners instead of bespoke corners**
- Gable rafter connection **form-fit instead of clamps**. This is much safer
- Gable rafter connection allows much faster set up
- Pinned deadhang system to save time during set up
- Less lateral compression braces between rafters required due to use of M39S gable rafters

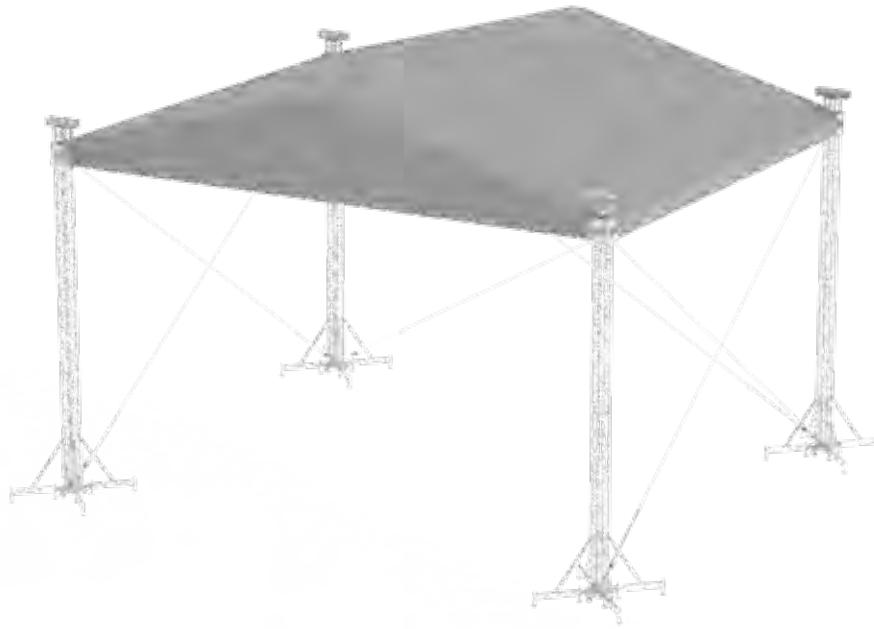

Loading capacity UDL	3982 kg
Loading capacity misc point loads	Depends on configuration
Loading capacity cantilever	1000 kg (4.5 m ²)
Self weight incl. wall canopies	2482 kg
Max peak gust wind speed in-service	20 m/s (measured at 10 m height)
Max peak gust wind speed out-of-service	28 m/s
Max peak gust wind during erecting	14 m/s
Ballast	Depends on configuration. Bespoke ballast bases / layher intergration available
Dimensions structure	W12.90 x D10.83 x H9.42*
Dimensions inside for stage platform	12x10 m
Trusses	M39S / M29S / M29T
Canopy	Standard: grey / black
	Optional: transparent / other colours
Staging	Several options possible like aluminium scaffolding system Subframe B
Structural calculations	DIN-EN 13814 / Euro codes
Miscellaneous	<ul style="list-style-type: none"> • Form fit connection between rafter and grid truss • Use of box corners. No bespoke corners • Auto-release system for wall canopies • Optional side wings • Ground ring or stage intergration for reducing ballast • Intermediate support towers for increased loading • Baubuch on request • M39S gable side rafters to minimise the use of compresion braces • Decreased set up times due to pin fork connections instead of clamps

* All data is based on calculated set-up. Other options are possible but need to be investigated on a case-by-case basis.




WHY SADDLE ROOF?

Corners

- Machined connection strip
- Highly increased building speed
- One adapter, 6 pins
- Zero tolerance fitting
- No specific building order
- Compatible for every roof size

- Machined plated adapter
- Zero tolerance fitting
- Mountable on standard M39S Box corner
- Compatible for every roof size

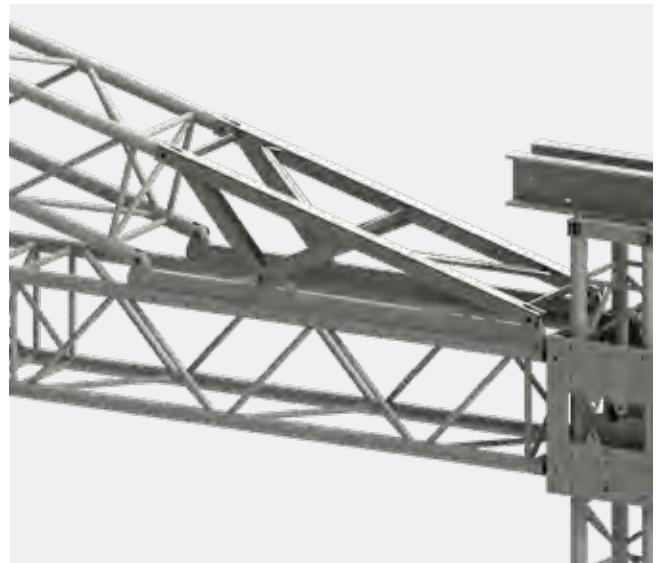

Safe System

- Increases building speed
- Strong and secure locking
- All towers exact same height

Stabilizers




- Machined plated adapter
- Zero tolerance fitting
- Mountable on standard M39S Box corner
- Compatible for every roof size







Saddle Roof

12 x 10 meter

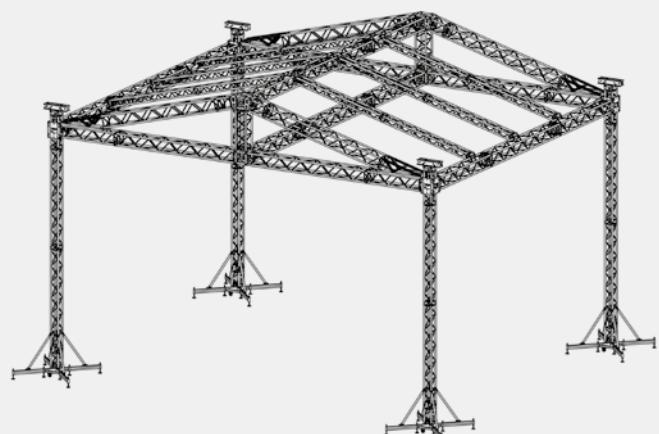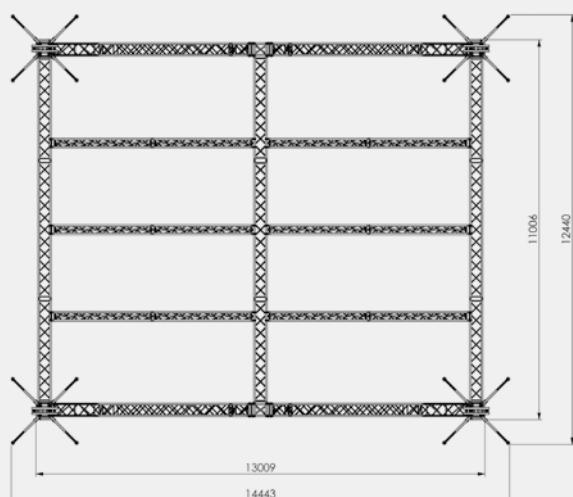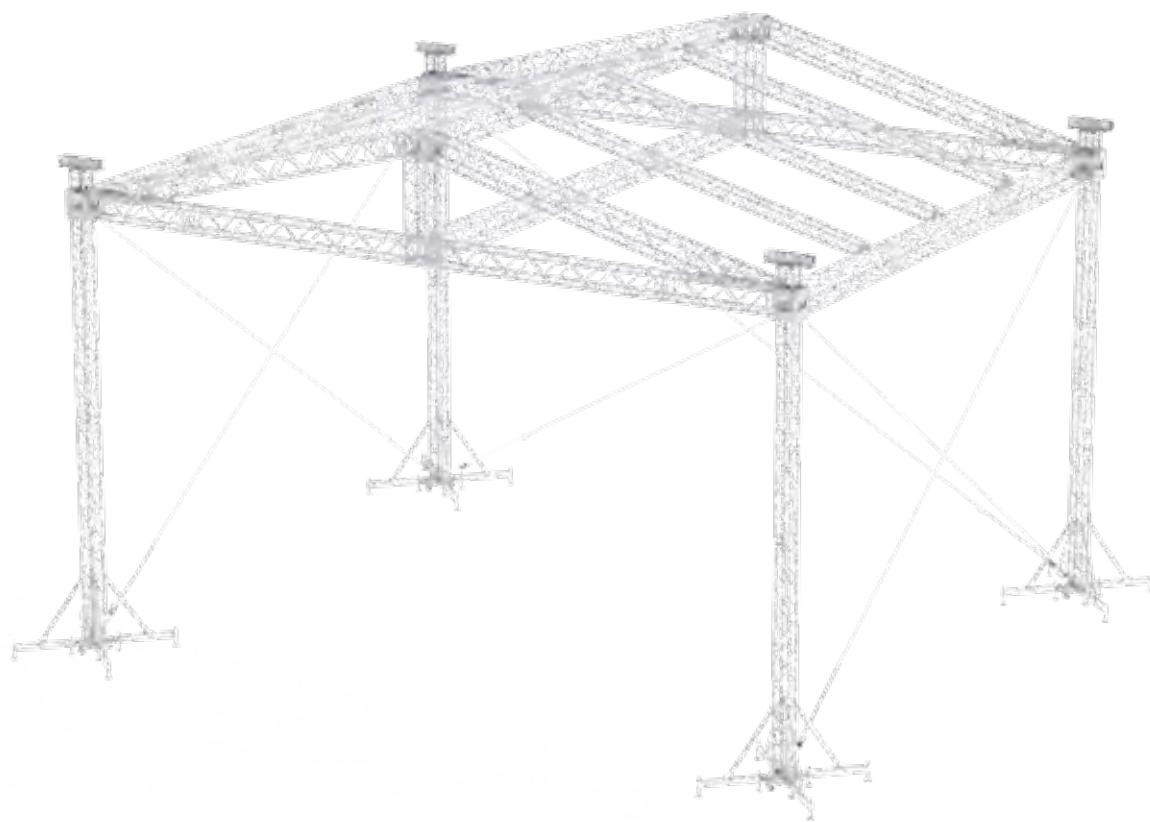

3D view

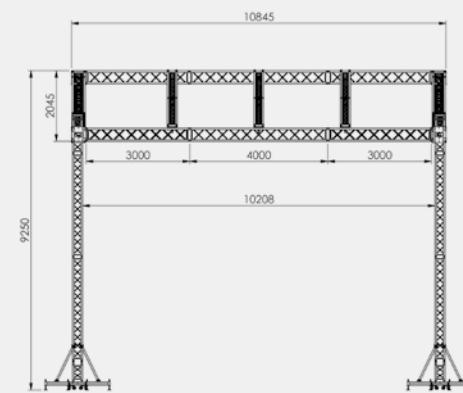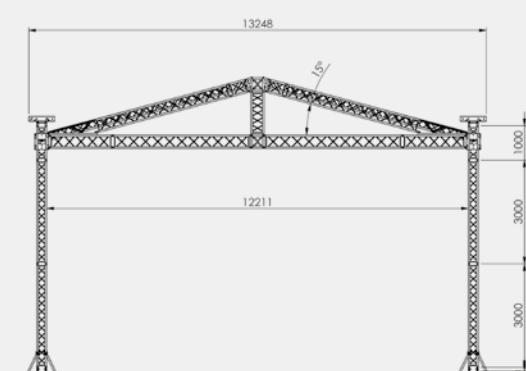





WHY SADDLE ROOF?

- Use of **boxcorners instead of bespoke corners**
- Gable rafter connection form-fit instead of clamps. This is much safer
- Gable rafter connection allows much faster set-up
- Pinned deadhang system to save time during set up
- Less lateral compression braces between rafters required due to use of M39S gable rafters

Special edition





Loading capacity UDL	4482 kg
Loading capacity misc point loads	Depends on configuration
Loading capacity cantilever	1000 kg (4.5 m ²)
Self weight incl. wall canopies	2182 kg
Max peak gust wind speed in-service	20 m/s (measured at 10 m height)
Max peak gust wind speed out-of-service	28 m/s
Max peak gust wind during erecting	14 m/s
Ballast	Depends on configuration. Bespoke ballast bases / layher integration available
Dimensions structure	W10.90 x D7.83 x H9.10*
Dimensions inside for stage platform	10 x 7 m
Trusses	M39S / M29S / M29T
Canopy	Standard: grey / black Optional: transparent / other colours
Staging	Several options possible like aluminium scaffolding system StageFrame82
Structural calculations	DIN-EN 13814 / Euro codes
Miscellaneous	<ul style="list-style-type: none"> • Form fit connection between rafter and grid truss • Use of box corners. No bespoke corners • Auto-release system for wall canopies • Optional side wings • Ground ring or stage intergration for reducing ballast • Intermediate support towers for increased loading • Baubuch on request • M39S gable side rafters to minimise the use of compresion braces • Decreased set up times due to pin fork connections instead of clamps


* All data is based on calculated set-up. Other options are possible but need to be investigated on a case-by-case basis.

 10 x 8 meter


Saddle Roof

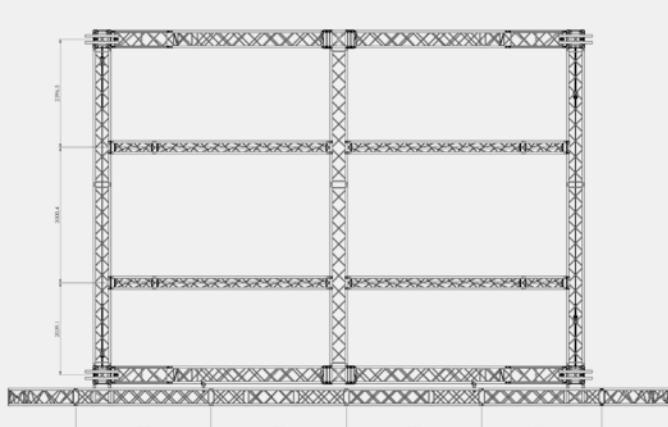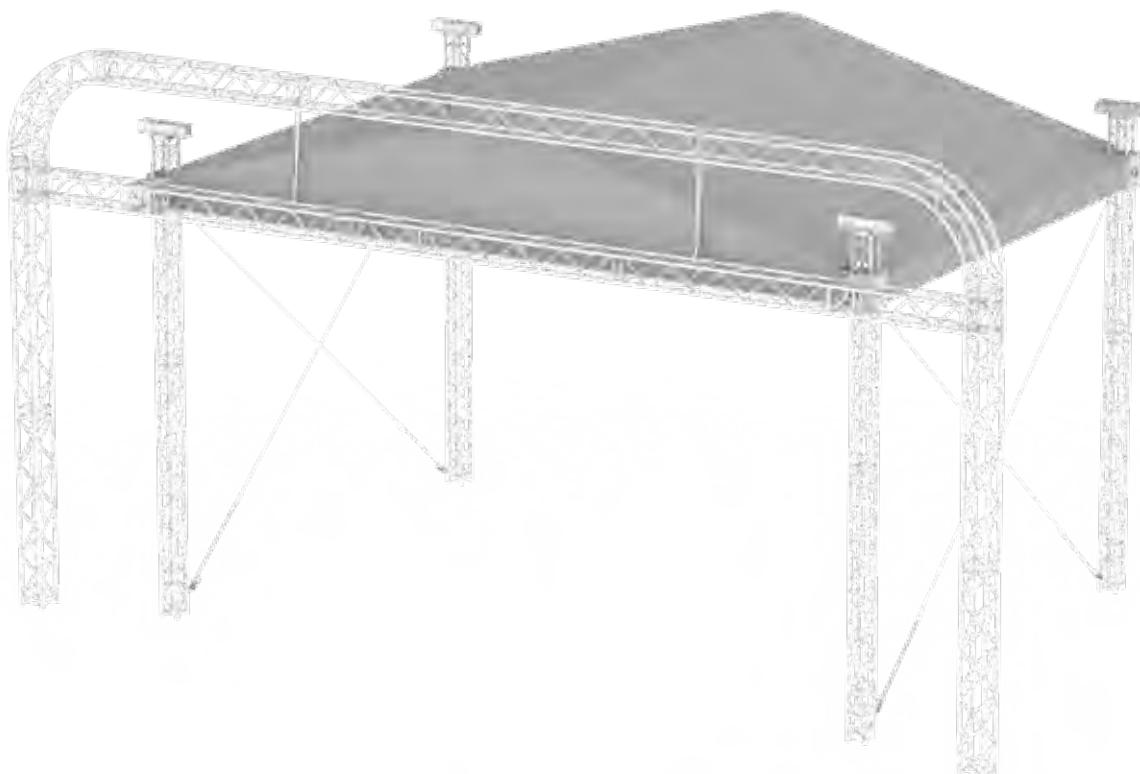


Top view

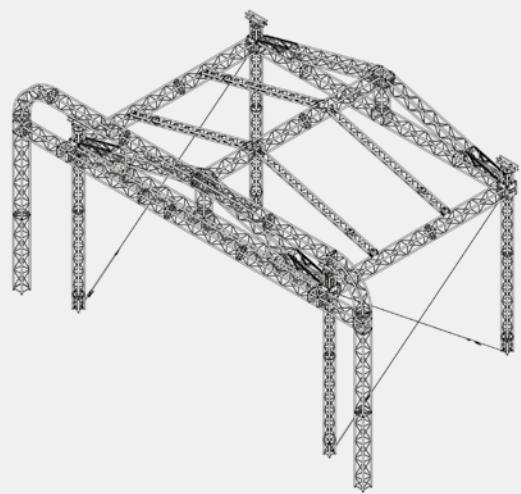

3D view

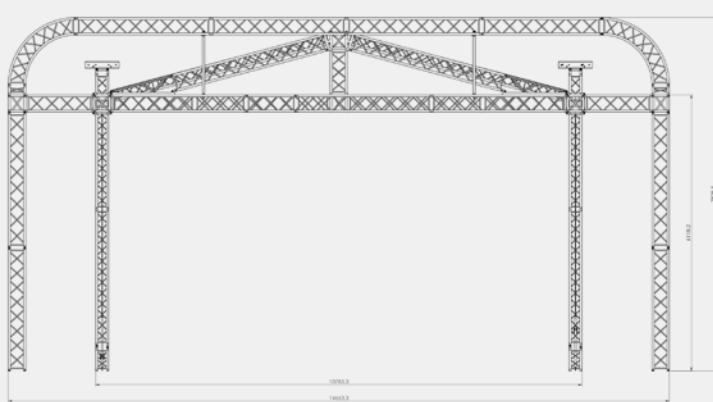

Front view

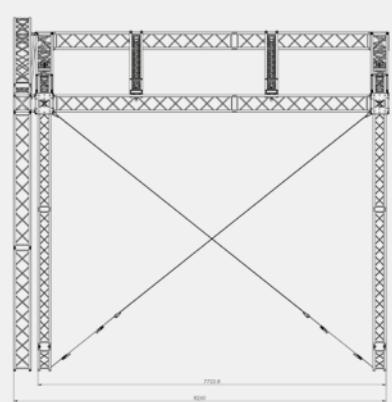

Left view

All measurements are in mm



WHY PITCHED ROOF?


- Hurricane proof design (max 40 m/s)
- Canopies sit in kedar profiles for ease of build
- Auto-release system for wall canopies
- Ground ring for reduced ballast
- Bespoke tower bases for correct integration of ballast
- High load capacity
- Full aluminium structure
- Many options for staging or substructure
- Complies with European standards for temporary structures

Loading capacity UDL	5645 kg
Loading capacity misc point loads	7000 kg
Loading capacity front cantilever beams	2 x 500 kg
Self weight incl. wall canopies	3197 kg
Max peak gust wind speed in-service	20 m/s (measured at 10 m height)
Max peak gust wind speed out-of-service	28 m/s - 40 m/s
Max peak gust wind during erecting	14 m/s
Ballast	Depends on configuration Bespoke ballast bases
Dimensions structure	W15.08 x D13.96 x H9.93
Dimensions inside for stage platform	14 x 12 m
Trusses	M39S / M39TOW / L52S
Canopy	Standard: grey / black Optional: transparent
Staging	Several options possible like aluminium scaffolding system StageFrame82
Structural calculations	EN 13814 / Euro codes
Miscellaneous	<ul style="list-style-type: none"> • Canopies fitted in kedar profile • Auto-release system for wall canopies • Optional side wings • Ground ring for reducing ballast • Intermediate support towers for increased loading • Baubuch on request • Structural calculations per DIN-EN-13814


* All data is based on calculated set-up. Other options are possible but need to be investigated on a case-by-case basis.

 14 x 12 meter


Pitched Roof

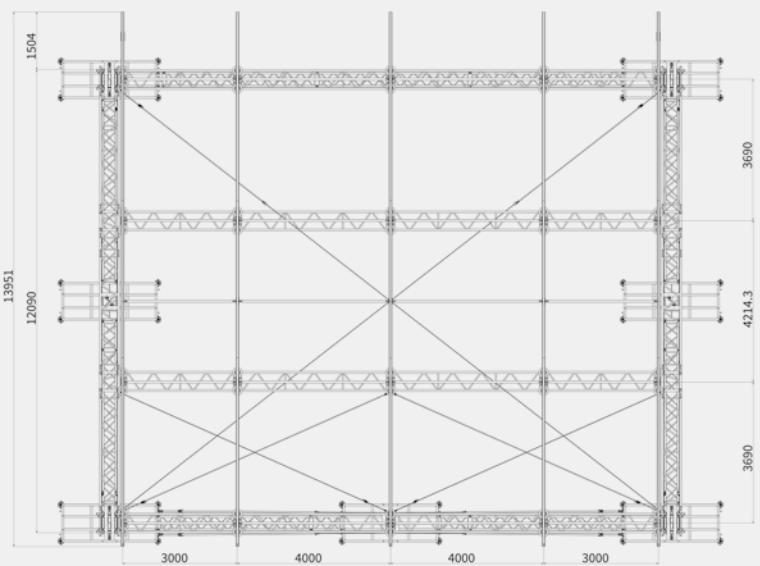


Top view

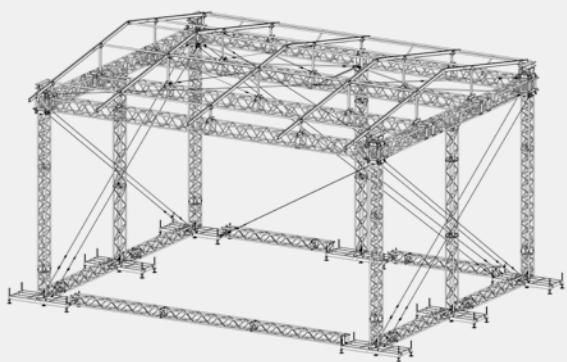

3D view

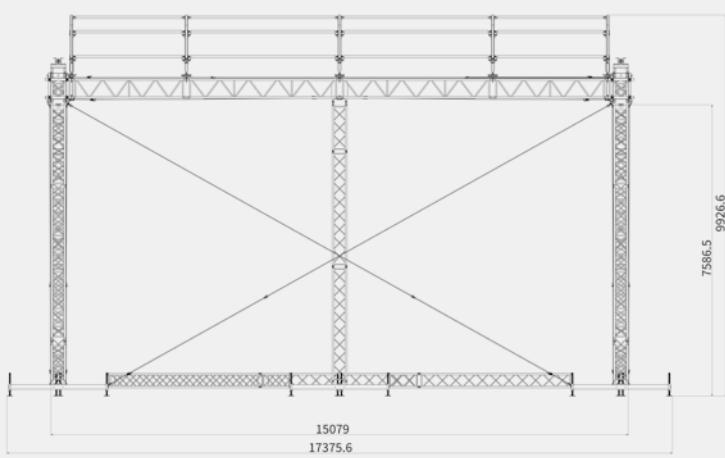

Front view

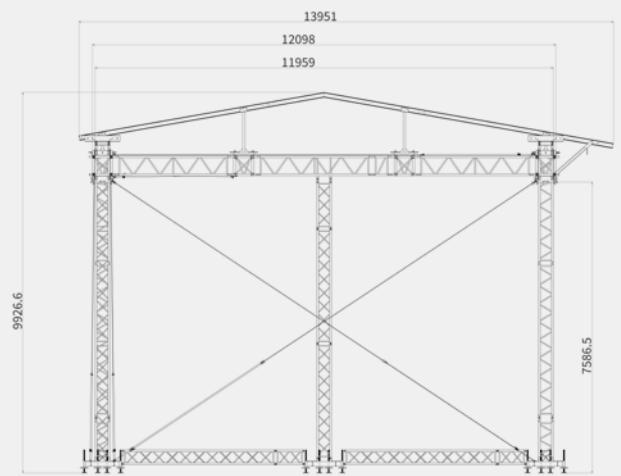

Right view

All measurements are in mm

SIXTY82

87





LED Screen Support 6 x 4

90

LED Screen Support 8 x 6

92





LED Screen Support


 6 x 4 meter


WHY LED SCREEN SUPPORT?

- Versatile LED Screen Support structure based on standard trusses
- Easy set-up due to fixed base structure
- Structurally calculated and proven concept
- Full aluminium structure
- Use of multibase for easy positioning of ballast
- Rafters can be lifted together with erection of tower to save assembly time
- Bespoke head section with integrated brace connection for fast set up and less bespoke parts
- Possibility to deadhang at ground level which eliminates the need to climb the towers



Scan the QR-Code
to watch the LED Screen
Support technical video

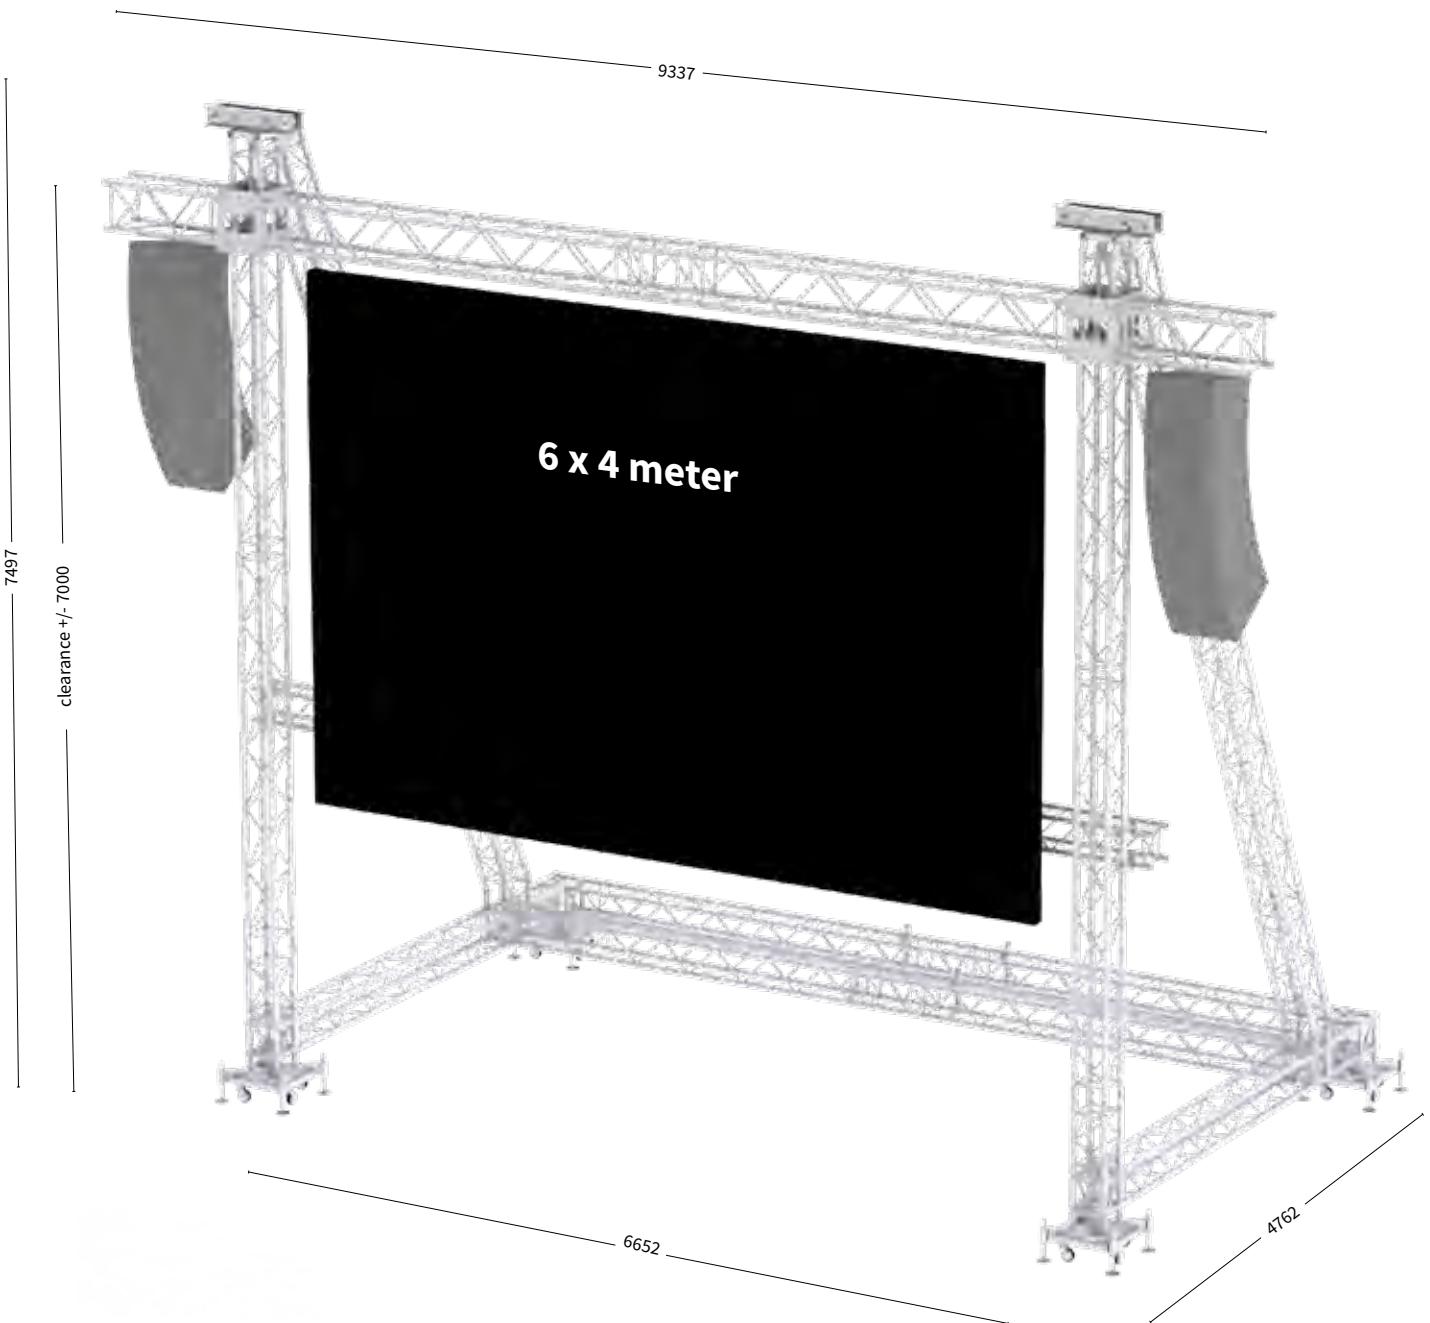



LED Screen Support




Max screen size	6 x 4 meter
Max PA size front	1.5 m ²
Max screen weight	1500 kg
Max PA weight	2 x 250 kg
Max peak gust wind speed in-service	20 m/s (measured at 10 m height)
Max peak gust wind speed out-of-service	27 m/s
Max peak gust during lifting	8 m/s
Ballast (if screen weight is 1500kg)	2 x 900 kg
Dimensions	See drawing
Trusses	M29S / M29T / M39S

* Above data based on calculated set-up.


Other options are possible but need to be investigated on a case-by-case basis.

* Calculations per DIN-EN13814:2013 for WS 1-2 in-land in Germany.


* Baubuch on request.

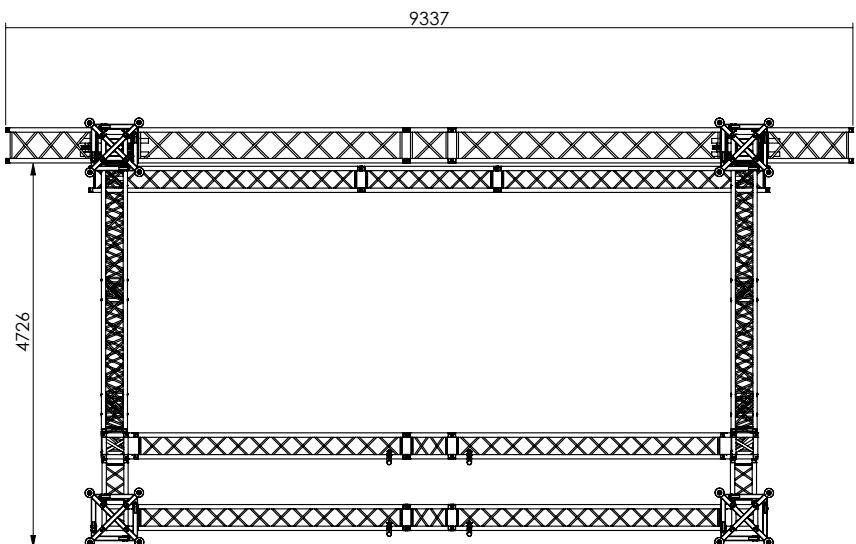

Top view

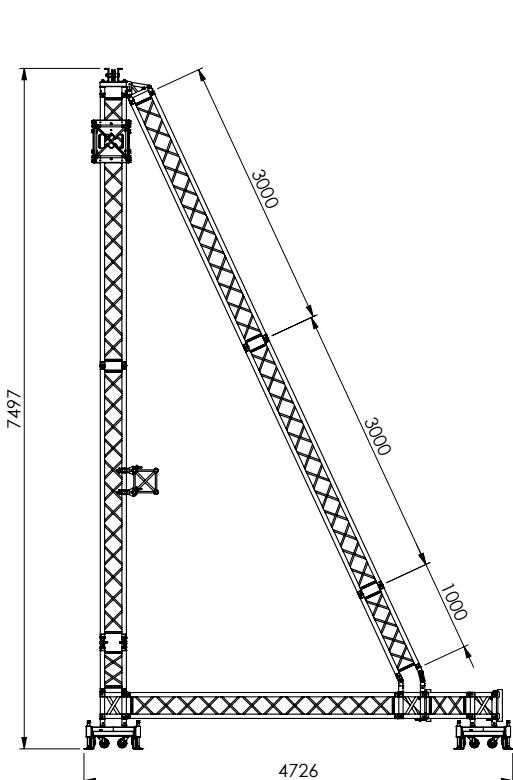

Left view

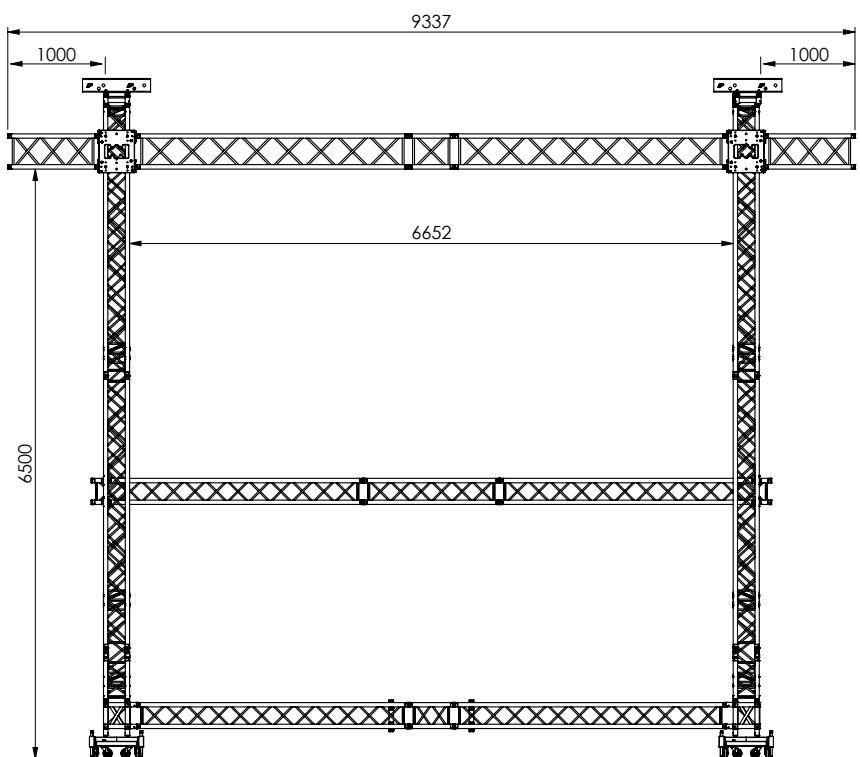


front view



LED Screen Support



8 x 6 meter

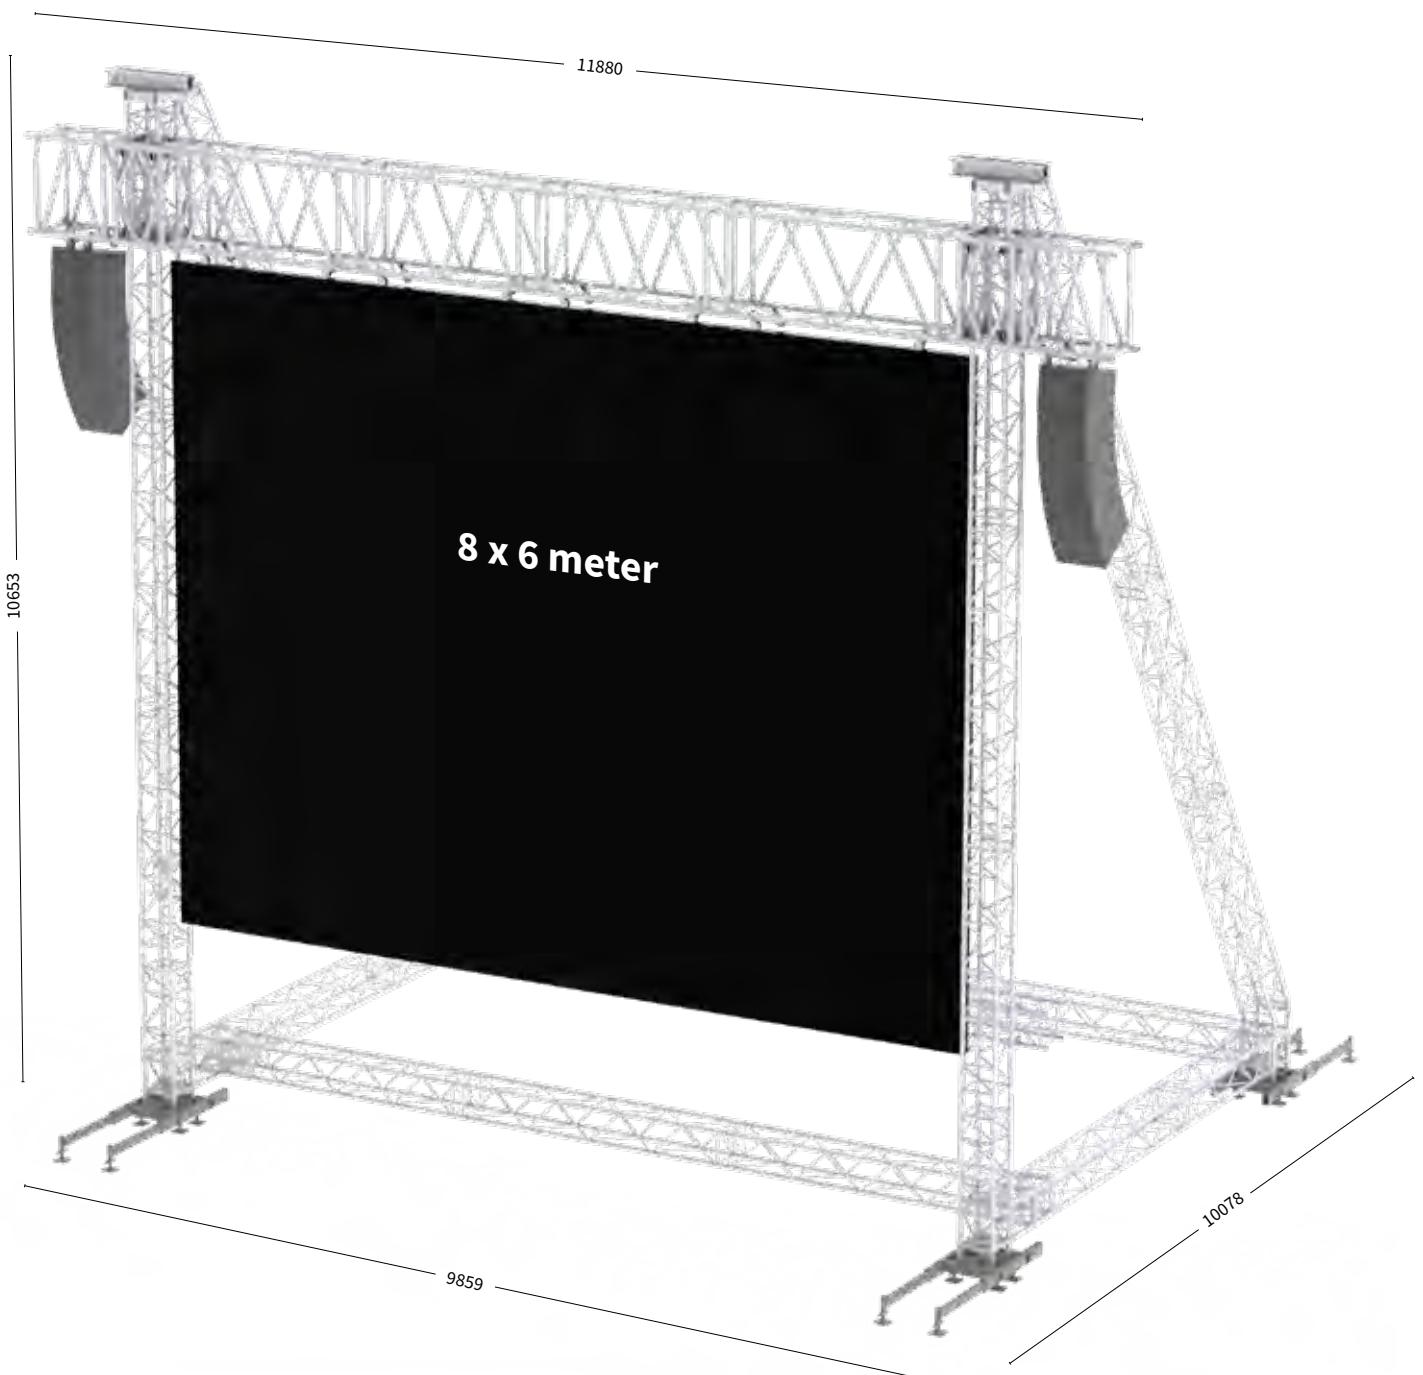

8 x 6 meter

LED Screen Support




Max screen size	8 x 6 meter
Max PA size front	2.5 m ²
Max screen weight	3000 kg
Max PA weight	2 x 500 kg
Max peak gust wind speed in-service	20 m/s (measured at 10 m height)
Max peak gust wind speed out-of-service	27 m/s
Max peak gust during lifting	8 m/s
Ballast	2 x 1000 kg (if screen weight is 1500kg) and 2 x 300 kg
Dimensions	See drawing
Trusses	M39TOW / M39S / XL101

* Above data based on calculated set-up.


Other options are possible but need to be investigated on a case-by-case basis.

* Calculations per DIN-EN13814:2013 for WS 1-2 in-land in Germany.


* Baubuch on request.

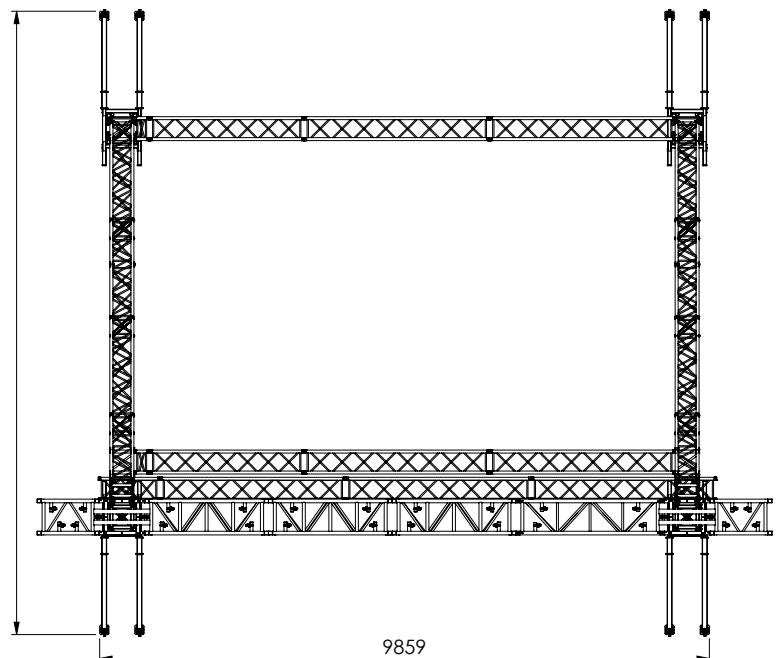


Top view

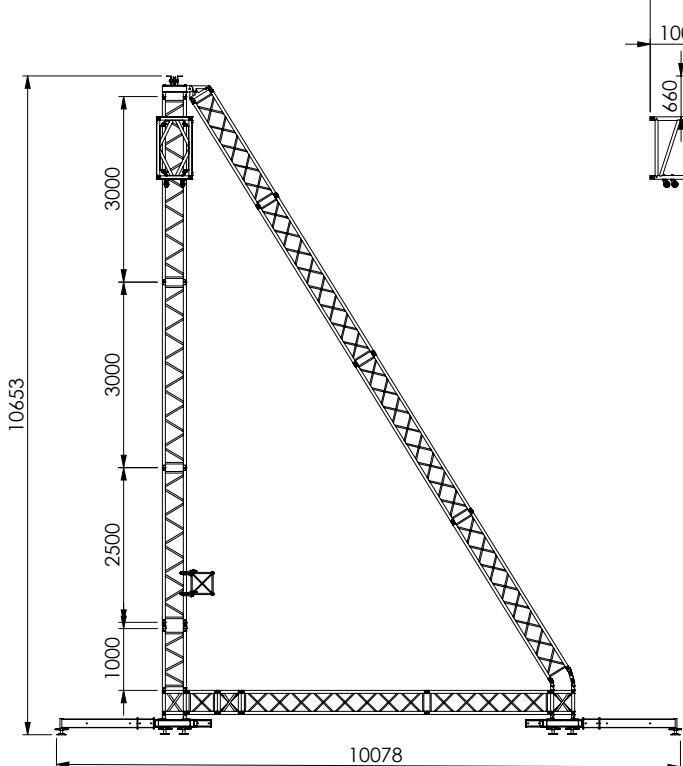

Right view

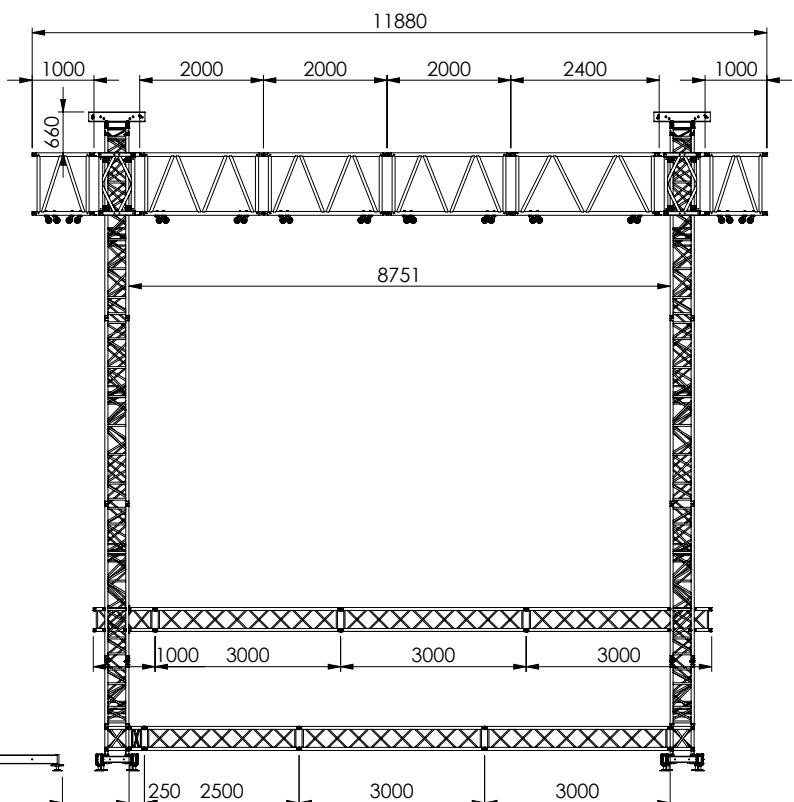

Back view

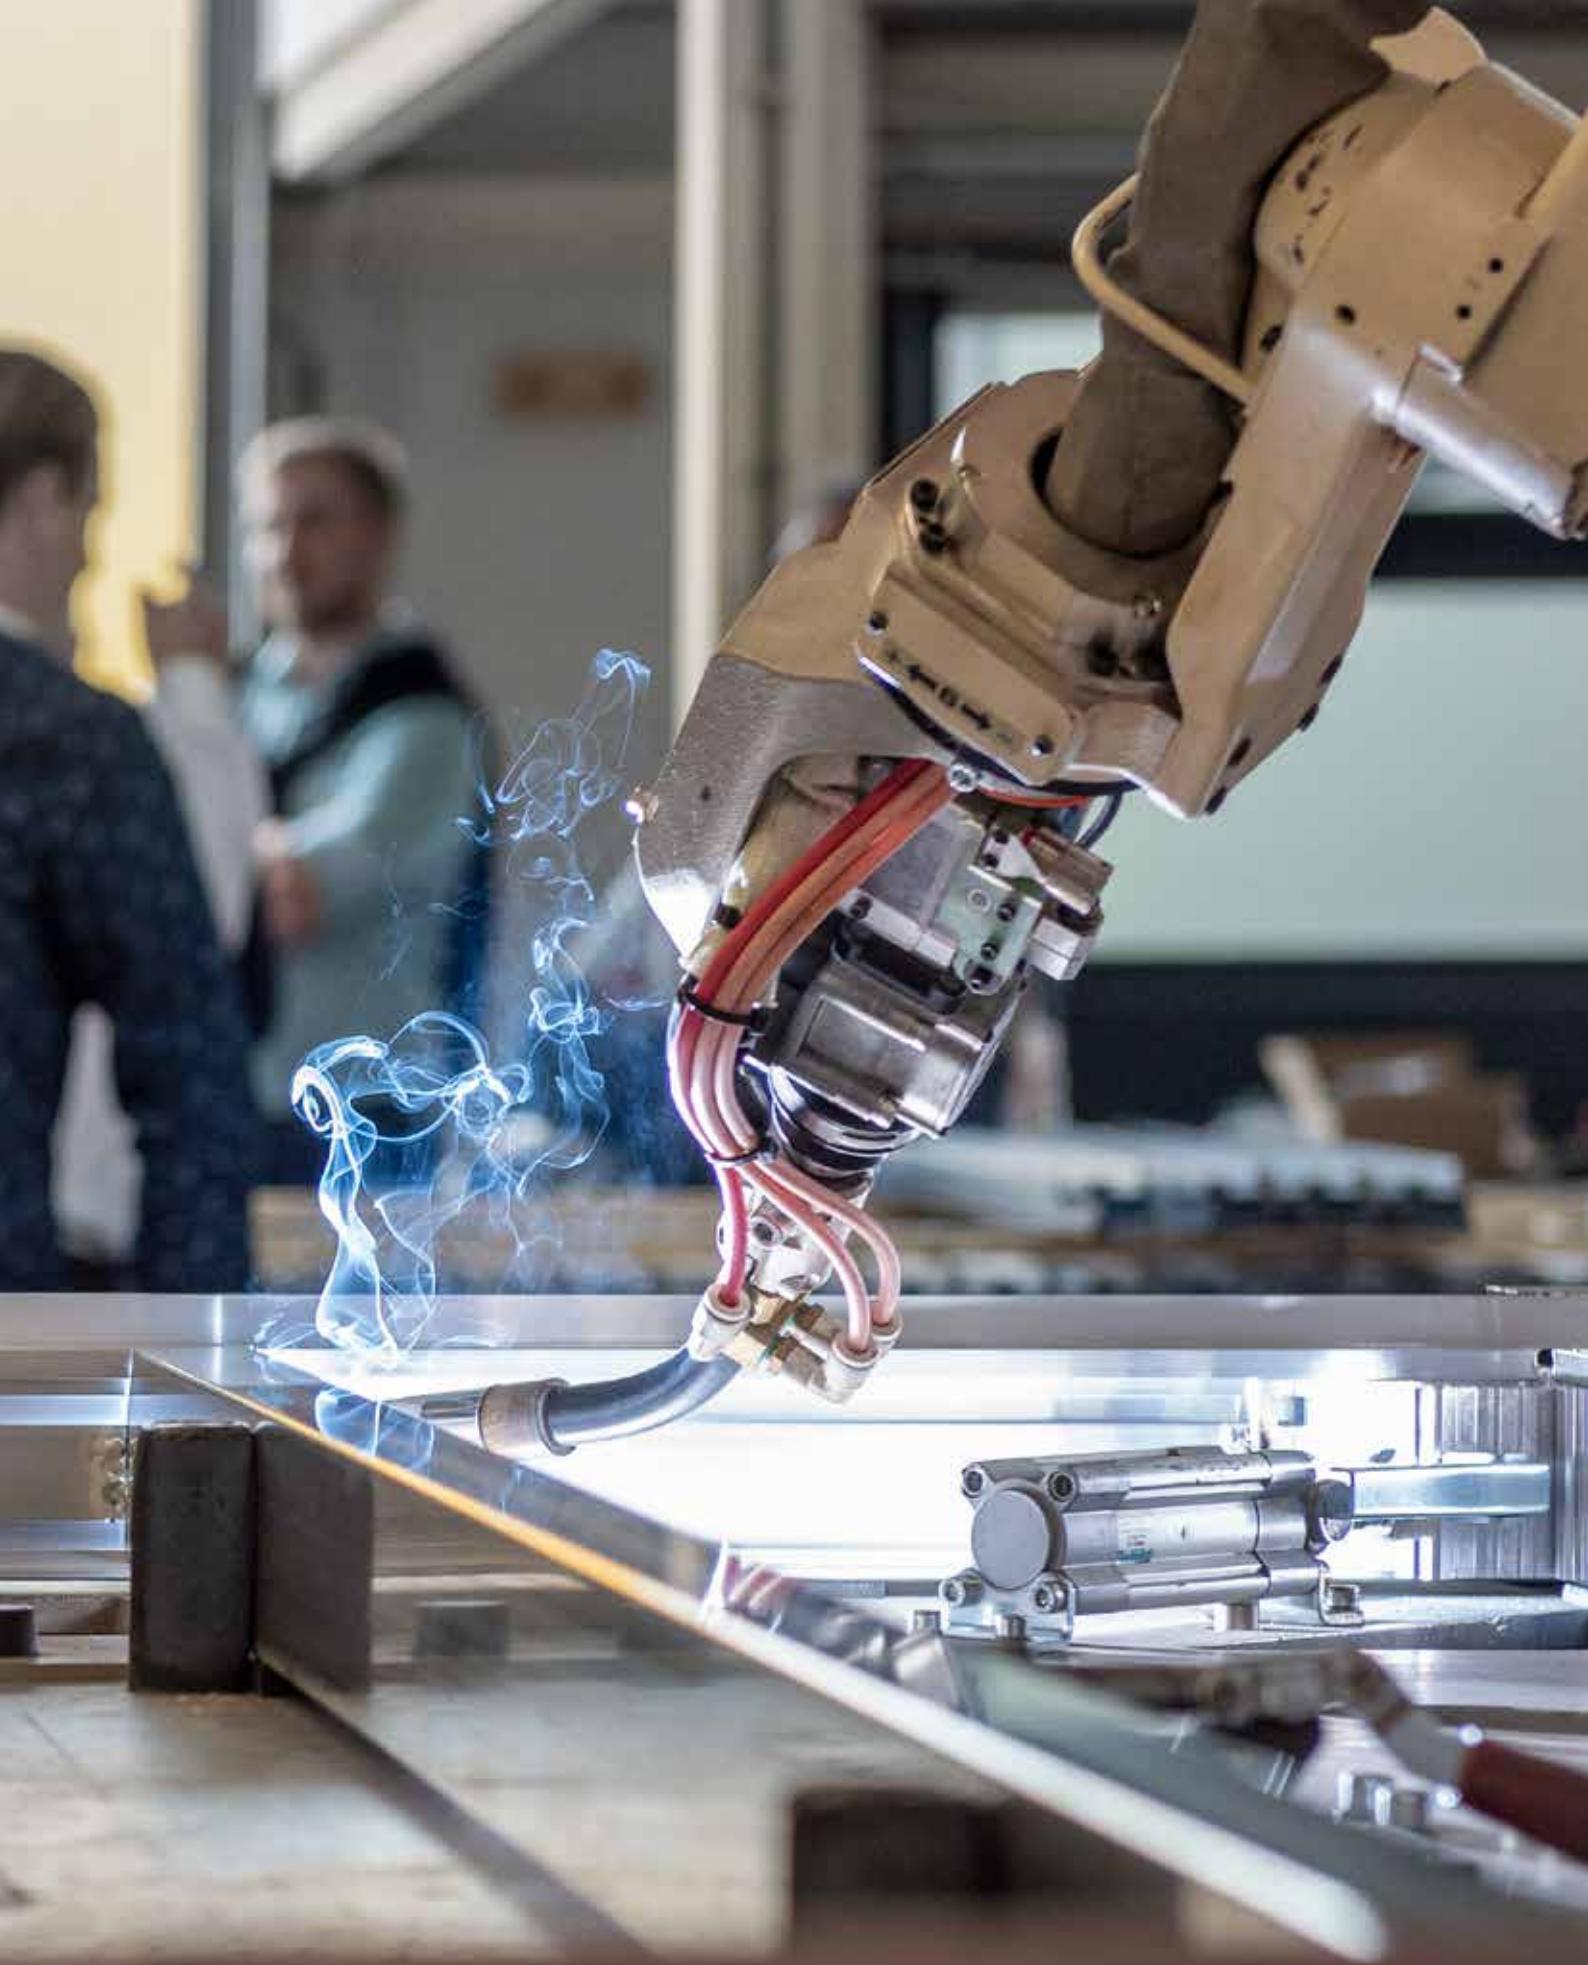



STAGE82	96
Stage Legs	101
Subframes	102
Stage Accessories	111
Stairs Adjustable	112
Stairs Modular	113
Stage Railing	114
Skirting	115






STAGE82




Birch Plywood / Unfinished



Birch Plywood / Black

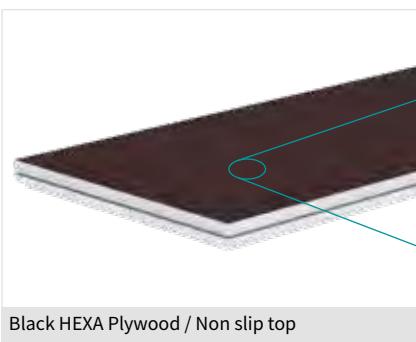

Black HEXA Plywood / Non slip top

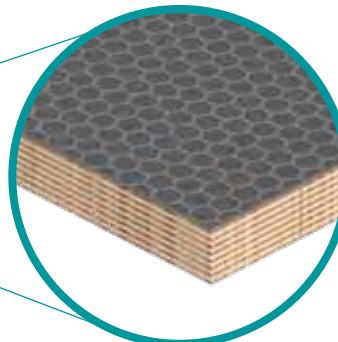

Scan the QR-Code

to watch the
technical video





WHY STAGE82 MODEL M?

- Frame design facilitates much easier handling and pick up by hand
- Scaffolding event beam compatible
- Double painted plywood topping




750 kg/m²

Lateral loading 10%

Plywood 15 mm

36 kg (2 x 1 m)

((RFID))

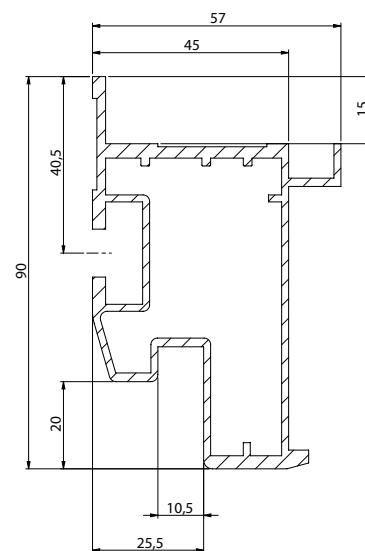

Rectangular 200 x 100 cm

Product	Code	Weight
Black HEXA Plywood / Non slip top	310001	35.68 kg
Birch Plywood / Black	311001	35.68 kg
Birch Plywood / Unfinished	312001	35.68 kg



Rectangular 100 x 100 cm

Product	Code	Weight
Black HEXA Plywood / Non slip top	310002	21.7 kg
Birch Plywood / Black	311002	21.7 kg
Birch Plywood / Unfinished	312002	21.7 kg



Rectangular 200 x 50 cm

Product	Code	Weight
Black HEXA Plywood / Non slip top	310003	21.17 kg
Birch Plywood / Black	311003	21.17 kg
Birch Plywood / Unfinished	312003	21.17 kg





STAGE82 Model M

Triangular 200 x 100 cm left (3 legs needed)

Product	Code	Weight
Black HEXA Plywood / Non slip top	310005	20.7 kg
Birch Plywood / Black	311005	20.7 kg
Birch Plywood / Unfinished	312005	20.7 kg



Triangular 200 x 100 cm right (3 legs needed)

Product	Code	Weight
Black HEXA Plywood / Non slip top	310006	20.7 kg
Birch Plywood / Black	311006	20.7 kg
Birch Plywood / Unfinished	312006	20.7 kg



Triangular 100 x 100 cm (3 legs needed)

Product	Code	Weight
Black HEXA Plywood / Non slip top	310007	13 kg
Birch Plywood / Black	311007	13 kg
Birch Plywood / Unfinished	312007	13 kg



Circle 200 cm 90° (4 legs needed)

Product	Code	Weight
Black HEXA Plywood / Non slip top	310015	15 kg
Birch Plywood / Black	311029	15 kg
Birch Plywood / Unfinished	312016	15 kg



Circle 400 cm 45° (4 legs needed)

Product	Code	Weight
Black HEXA Plywood / Non slip top	310016	17 kg
Birch Plywood / Black	311030	17 kg
Birch Plywood / Unfinished	312017	17 kg



Circle 600 cm 22.5° (4 legs needed)

Product	Code	Weight
Black HEXA Plywood / Non slip top	310017	19 kg
Birch Plywood / Black	311031	19 kg
Birch Plywood / Unfinished	312018	19 kg





- Staging Modules must be used within the limits of the structural repost
- Loading figures mentioned are only valid for static loads
- Self-weight is already taken into account

Maximum uniformly distributed load

Check alloy when legs are not purchased at SIXTY82

Podium height	80 cm (40 / 60 cm)	100 cm	120 cm	140 cm	160 cm
Tube 48.3 x 3 mm EN AW 6082 T6	750 kg/m ²	500 kg/m ²	500 kg/m ²	350 kg/m ²	350 kg/m ²

Maximum point load


LC1 = 2 x 150 kg at a distance of minimum 500 mm at any place

LC2 = 350 kg single point load above each of the 200 cm sides or middle beam

LC3 = 500 kg in the middle of the 100 cm sides

LC4 = 210 kg in the middle of an unsupported woodplate

*Point loads need to have a 50 x 50 mm bearing surface minimum.
Total loading shall not exceed 1500 kg.*


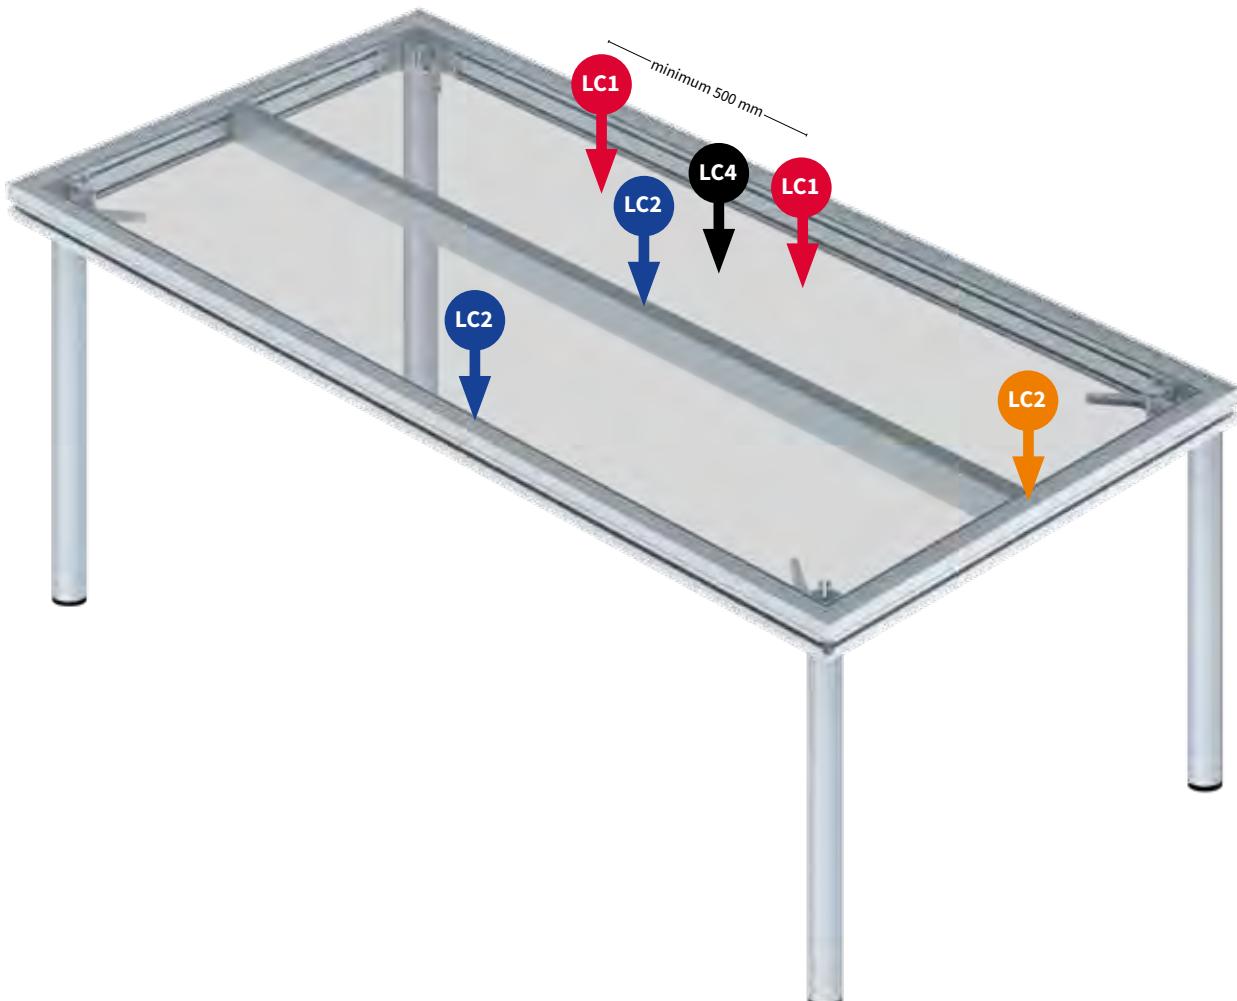








LEG

Code	Length (H)	Weight
340001	20 cm	0.23 kg
340002	40 cm	0.46 kg
340003	60 cm	0.69 kg
340004	80 cm	0.93 kg
340005	100 cm	1.16 kg

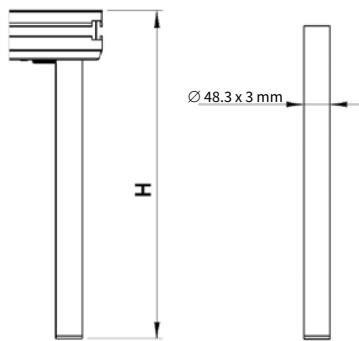


ADJUSTABLE LEG

Code	Length (H)	Weight
340007	20 cm	0.27 kg
340008	40 cm	0.49 kg
340009	60 cm	0.72 kg
340010	80 cm	0.95 kg
340011	100 cm	1.18 kg

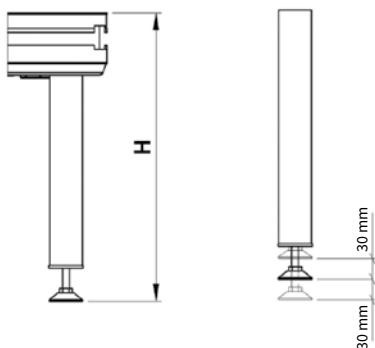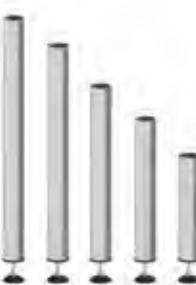

TELESCOPIC LEG

Code	Length (H)	Weight
340077	40 / 60 cm	1.4 kg
340014	60 / 90 cm	2.51 kg
340015	90 / 140 cm	3.57 kg
340016	100 / 160 cm	4.22 kg
340017	120 / 190 cm	5.1 kg

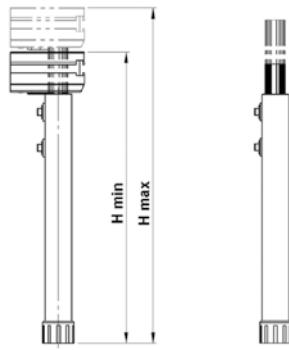

SWIVEL CASTOR LEG SINGLE 25 CM

340018

1.35 kg



SWIVEL CASTOR LEG DOUBLE 25 CM

340019

1.75 kg






Subframes

Subframe B

Product	Code
Leg Subframe B120 Stage82	341004
Rack Subframe B120 Stage82 200 x 120 cm	341005
Rack Subframe B120 Stage82 100 x 120 cm	341006
Leg Subframe B160 Stage82	341007
Rack Subframe B160 Stage82 200 x 160 cm	341008
Rack Subframe B160 Stage82 100 x 160 cm	341009
Leg Subframe B200 Stage82	341010
Rack Subframe B200 Stage82 200 x 200 cm	341011
Rack Subframe B200 Stage82 100 x 200 cm	341012
L-Pin 16x70 drop nose	811033
Scaff Spindle 60 cm	251009

WHY SUBFRAME B?

- For STAGE82
- For indoor and outdoor use
- Easy to level
- Extremely easy and fast to build and use
- Adjustable in height
- Integration in roof systems (can replace ground ring)
- Made by reinforced profile
- Internal diagonals integrated
- No adapters needed
- Offers space for ballast
- Rigid construction: can be calculated as ballast weight

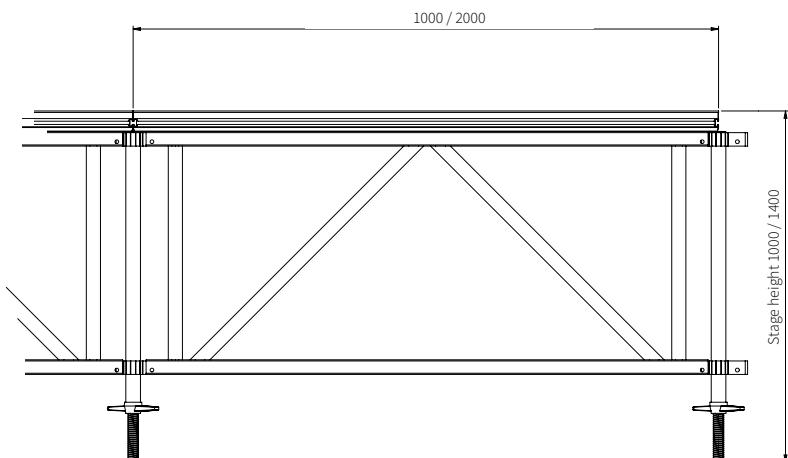


750 kg/m²


Lateral loading 10%

Stage height

120 cm	160 cm	200 cm
100 to 140 cm	140 to 180 cm	180 to 220 cm

All frames are available in 0.5, 1 and 2 meter

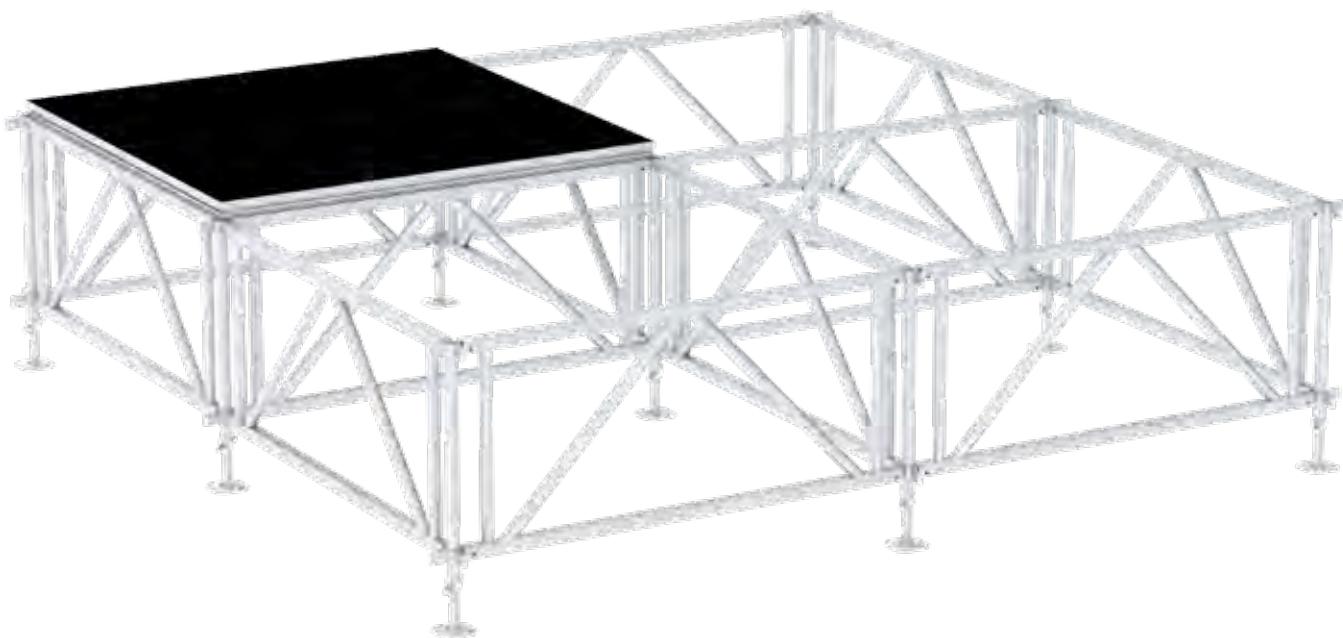


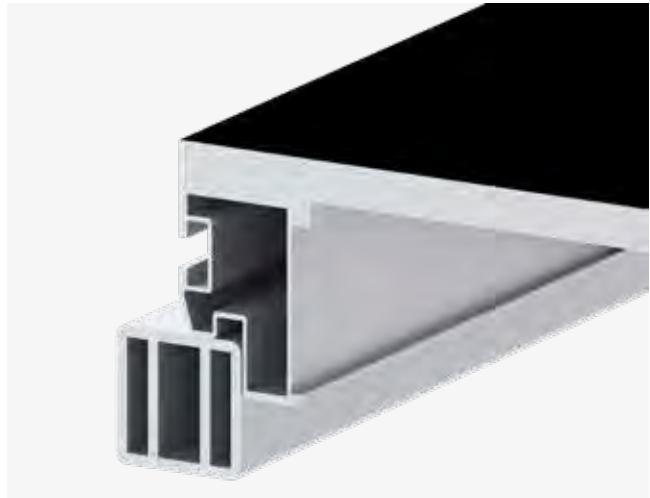**No adapters needed**

cross section view



Scan the QR-Code
to watch the STAGE82
technical video

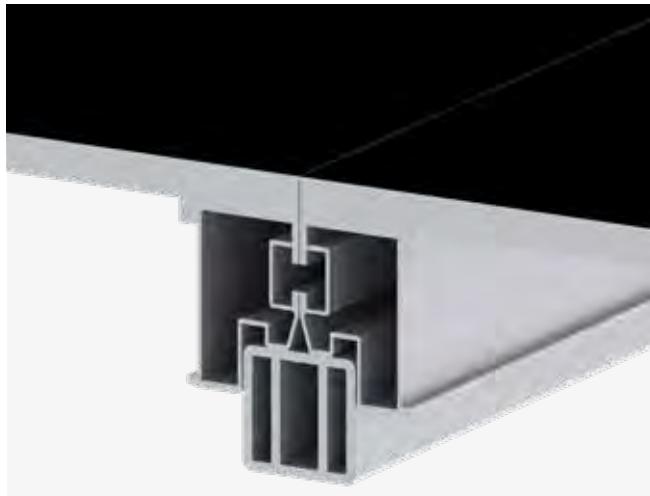






ARENA FRAME


WORLDWIDE PATENT

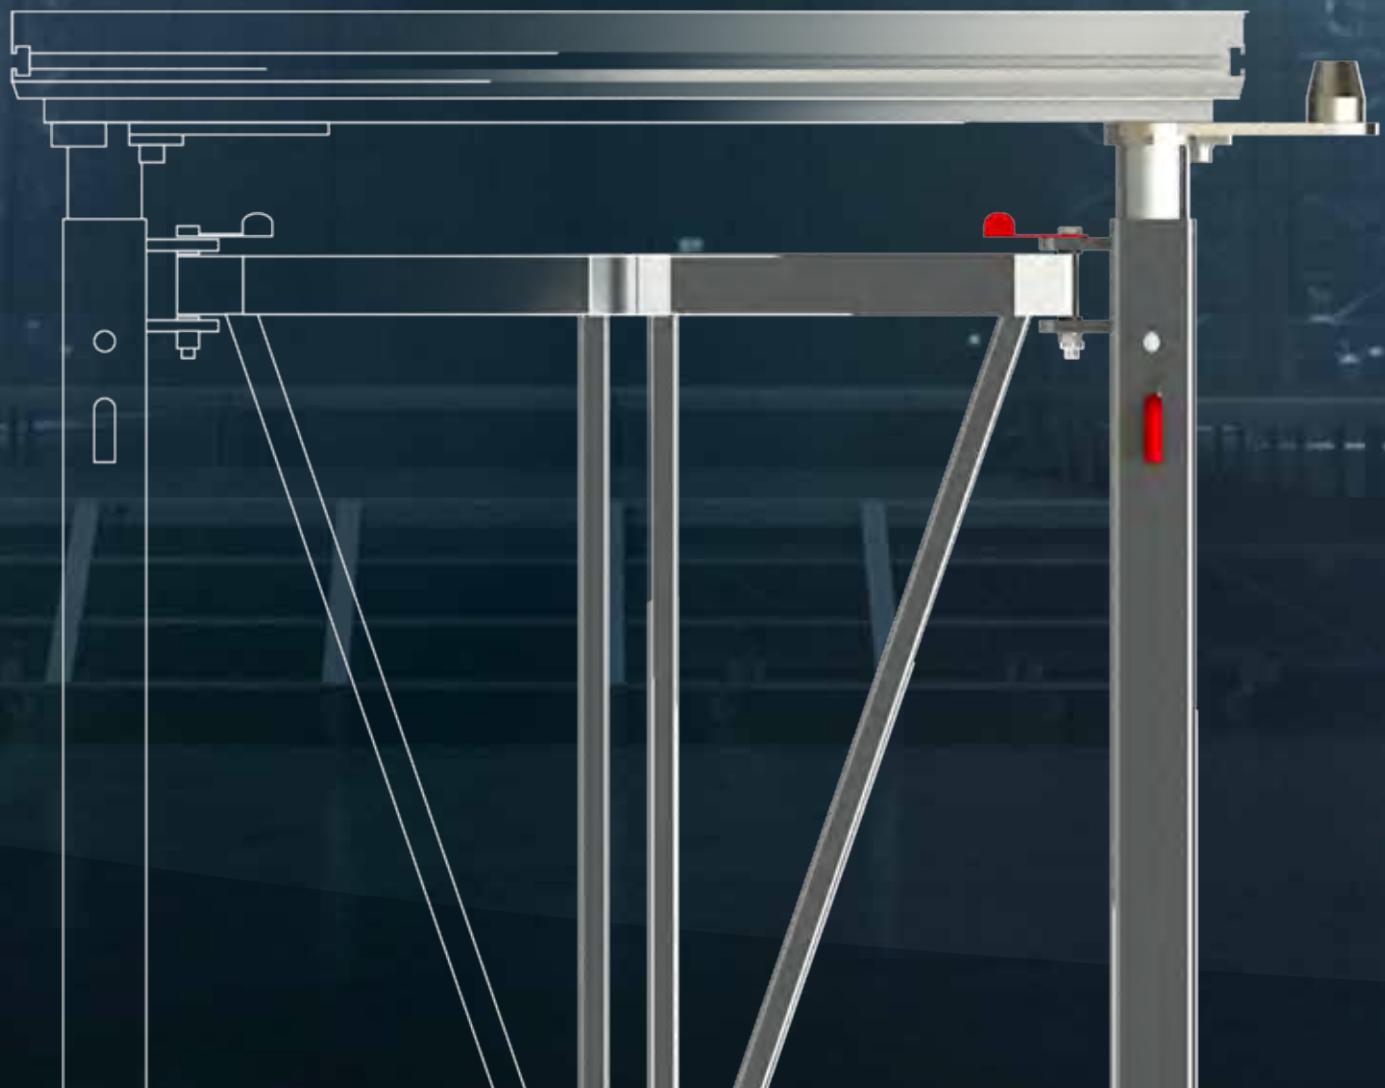

Sixty82 launches the new ARENA FRAME

This new concept is designed for venues which value the benefits of a quick and easy to build stage system. The straightforward design allows big stages to be built in the blink of an eye. A 200 square meter stage can be built in 90 minutes with a crew of 4 and a forklift. Because the frames are foldable, the system has a very small storage footprint. The ability to build the stage and rig at the same time greatly lowers the time needed to build any stage set.

4-WAY adapter

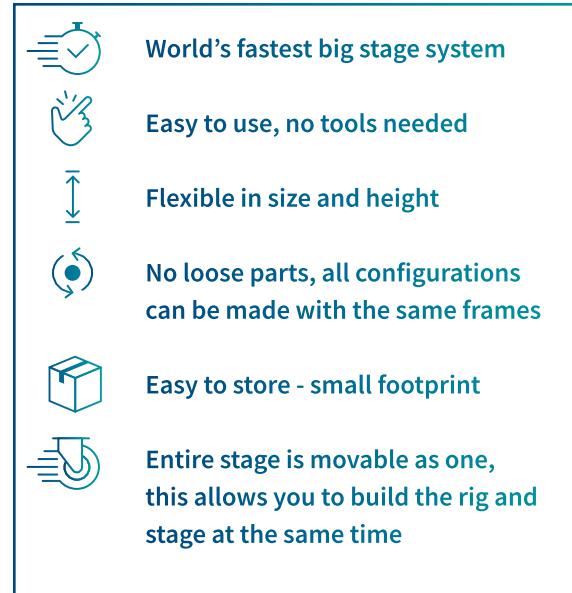

One size fits all Adapter

- One size fits all Adapter
- All different configurations can be made with the 4 way adapter.
- Rotatable in 4 orientations
- 500 kg 10% lateral load,
- 200x100 cm decks



Scan the QR-Code
to watch the ARENA FRAME
technical video




360°

Single and double frames
(to make even and uneven sized stages)

4 way-adapter

Single and double frames
(to make even and uneven sized stages)

ARENA FRAME

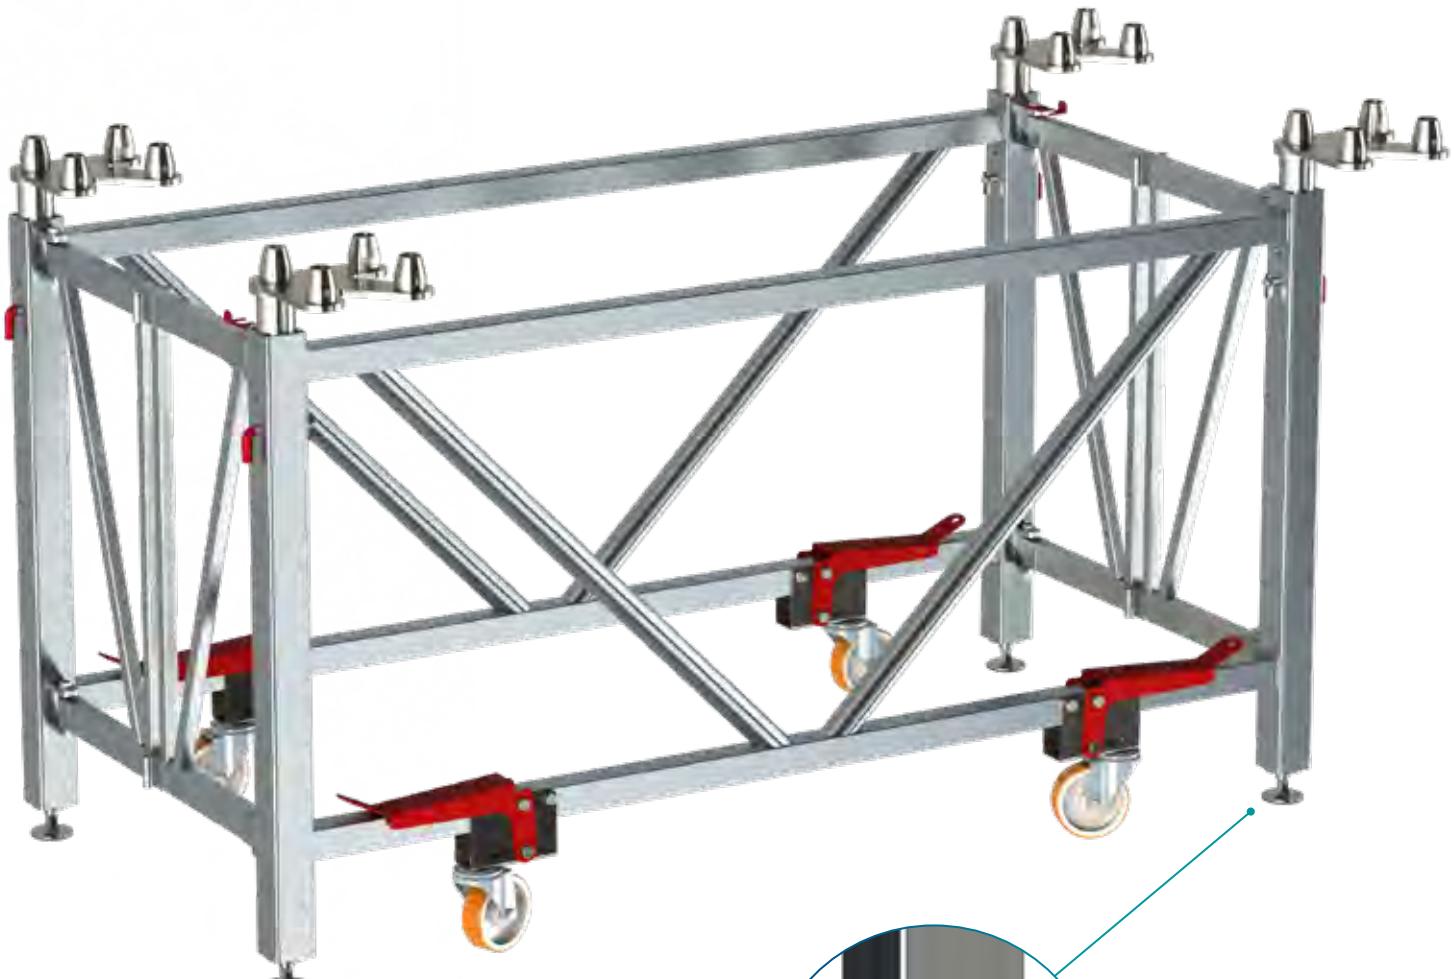


Level your stage

Stage can be perfectly stabilized using the adjustable feet

Rock solid structure

The unique brake system highly increases the stability of the stage.

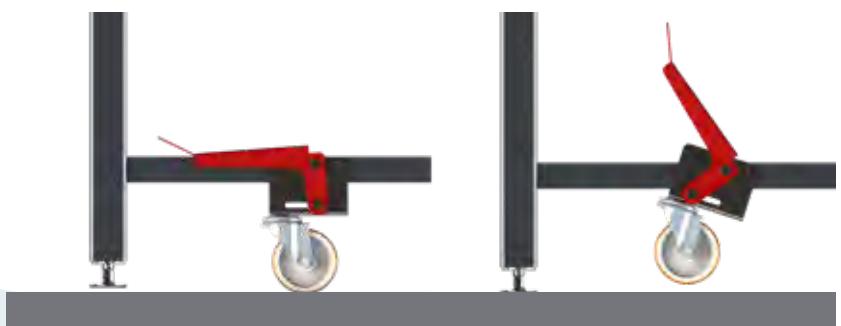


EASY to assemble



*Understage corridors
for storage & access*

Only two frames needed

Single and double frames (to make even and uneven sized stages)

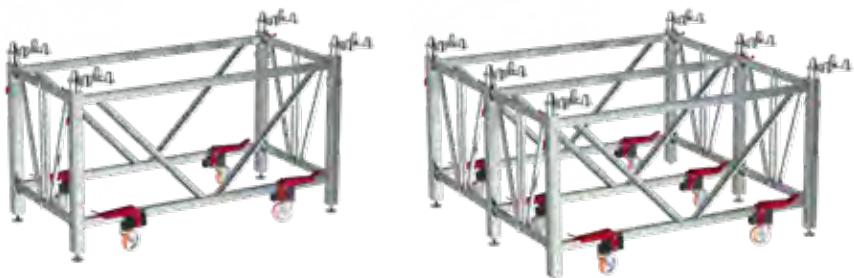

Height adjustable

Pre-assembled frames can be adjusted in height from 120cm - 190cm (4' - 6') in steps of 5 cm




Foldable frame

Easy to store, the folding frame creates a small footprint



BUILD THIS 200 M² STAGE
WITHIN 90 MINUTES!

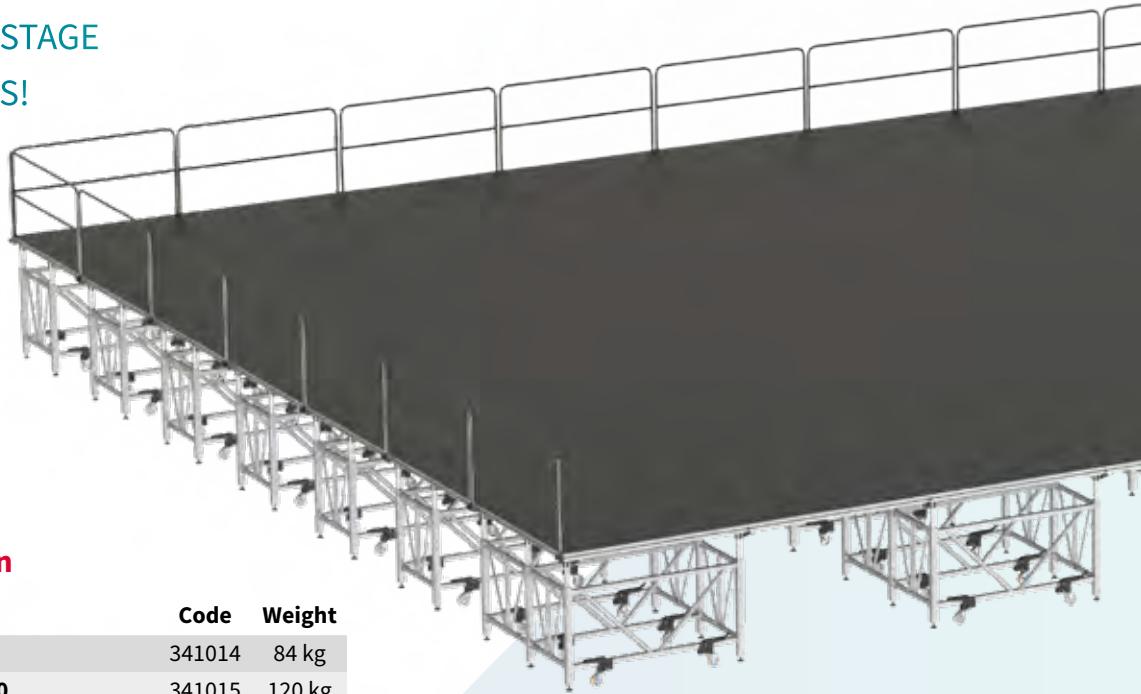

Technical information

Product	Code	Weight
Arena frame single 120-190	341014	84 kg
Arena frame double 120-190	341015	120 kg
Stage82 Arena adapter 4-way	341013	4.5 kg
Dolly arena frame forklift 6SF 4DF	215029	50 kg
Stage82 module M 200x100cm hexa	310001	35.6 kg
Stage82 module M 200x100cm black	311001	35.6 kg




STAIRS ARENA FRAME 120-190

351027



WHY: ETP multi-clamp

360035



- Most stable design in the market
- Suitable for STAGE82 (48mm diameter legs)
- 1 position for interlocking legs when staging modules are at level
- 1 position for interlocking legs when staging modules are at different levels
- Can be used to connect vertical poles to the legs
- Full aluminium
- Easy to mount

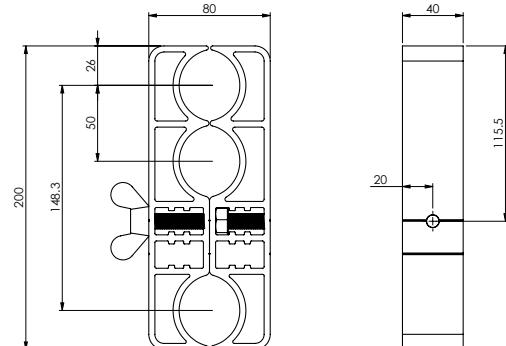


LEG-TO-LEG

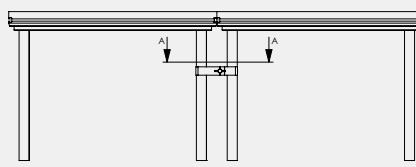

GRAND-STAND

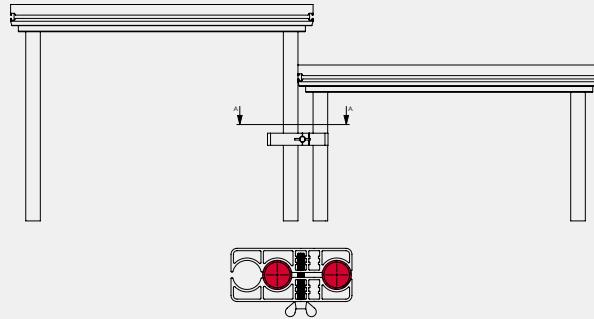

LEG-TO-POLE

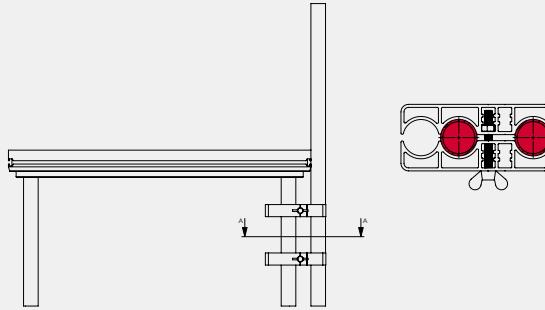

Scan the QR-Code

for more information


STAGE-TO-STAGE CLAMP

360034


0.52 kg


NUT


816030

M10

0.02 kg

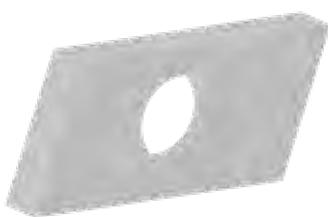
T-BOLT

816026

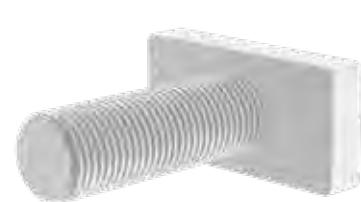M10

STAGE-TO-STAGE CONNECTOR

360004

0.05 kg


STAGE-TO-STAGE LEVELER

360005

0.07 kg


ETP MULTICLAMP

360035

0.61 kg


STEP-OFF PROFILE

360037

3.5 kg


HOOK-ON PROFILE

Code Length Weight

360041	15 cm	0.1 kg
360042	35 cm	0.2 kg
360043	85 cm	0.52 kg
360044	135 cm	0.81 kg
360045	185 cm	1.13 kg
360046	600 cm	3.7 kg


KICKBOARD

Code Length Weight

360002	85 cm	0.76 kg
360003	185 cm	2.81 kg


SKIRTING PROFILE

Code Length Weight

360009	85 cm	0.56 kg
360010	100 cm	0.58 kg
360011	185 cm	1.14 kg
360012	200 cm	1.16 kg





Stairs Adjustable

	4 STEPS	5 STEPS
Height	min 40 cm / max 100 cm	min 50 cm / max 120 cm
Width overall	835 mm	835 mm
Load per step	150 kg	150 kg
Uniformly distributed load m ²	500 kg	500 kg
Weight	17.8 kg	21.6 kg
Article number	351015	351016



WHY STAIRS ADJUSTABLE?

- Fits to all stage modules of SIXTY82
- Integrated fixation system system
- Steps with anti slip surface
- Full aluminium structure
- Flush out side for ease of transport
- Low self weight
- Use M10x50 (816035 + 816010) for assembly to LITE82

Assembly

NUT M10
816030



for STAGE82 Bolt M10x14 DIN912 (816059)


Handrail



**STAIRS MODULAR**

351018

6.5 kg

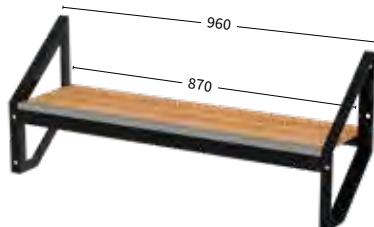

Including accessories to connect modular stairs

WHY STAIRS MODULAR?


- **Fits to all stage modules of SIXTY82**
- **A single step unit, one-size fits all**
- **Bolted together to create stair height up to 140 cm**
- **Ideal for transport: optimised packaging volume due to flat-pack-design**
- **Anti-slip Steps**
- **Loading 500 kg/m²**
- **Protected front edge of steps**
- **Integrated handrail connection**

Every element of modular stairs has a total height of 40cm, when mounted properly the height of the stairs will increase with steps of 20 cm.

The formula to calculate the amount of elements needed is:
height of stage in cm / 20 = ... - 1




Scan the QR-Code
 to watch the
 technical video

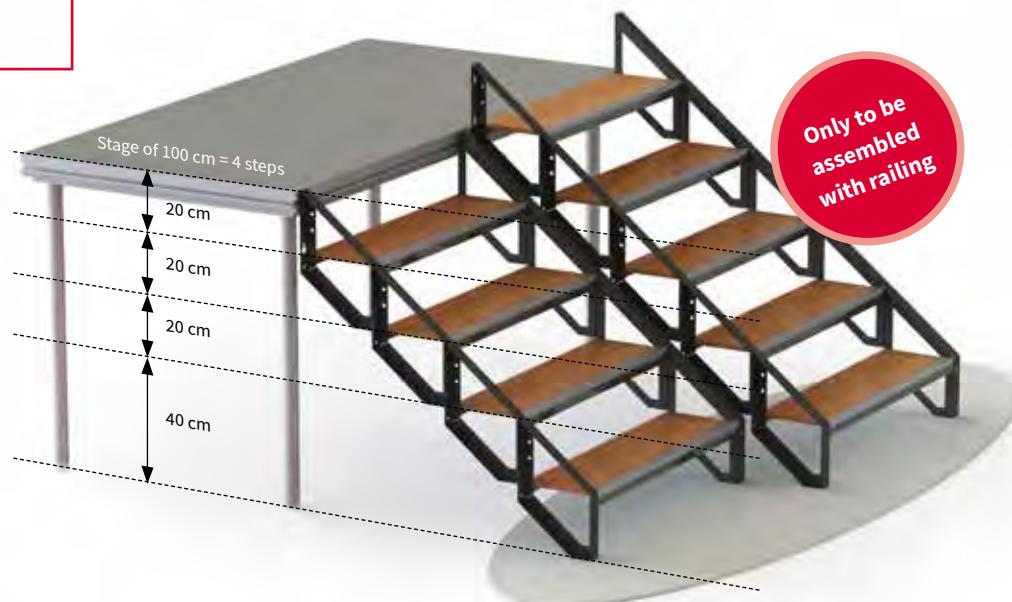**Handrail****HANDRAIL 3-4 STEPS**

351021

10 kg

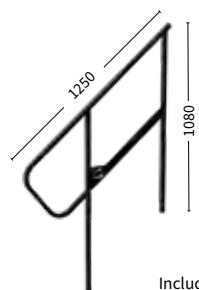


Including accessories

HANDRAIL 5-6 STEPS

351022

10.5 kg

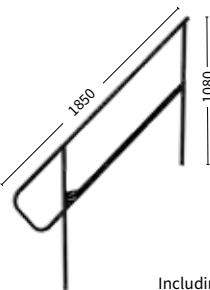

Including accessories

Assembly**NUT M10**

816030







for STAGE82

Bolt M10x12 DIN912 (816042)



STAGE82

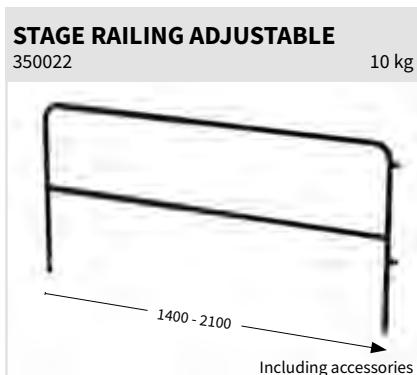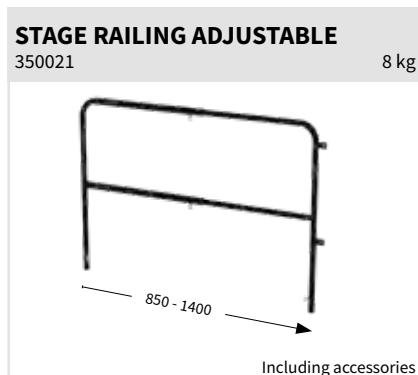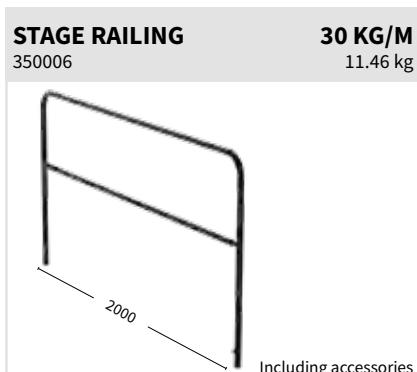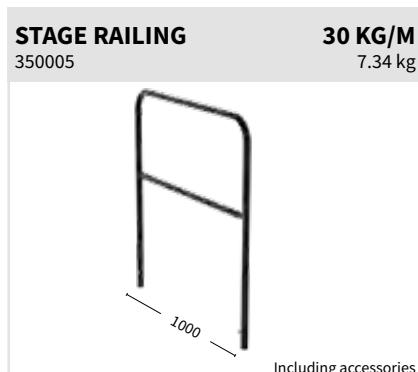

SKIRT STRAIGHT FINISH

Code Length

360013	20 x 100 cm
360014	40 x 100 cm
360015	60 x 100 cm
360016	80 x 100 cm
360017	100 x 100 cm
360018	20 x 200 cm
360019	40 x 200 cm
360020	60 x 200 cm
360021	80 x 200 cm
360022	100 x 200 cm

Polyester 160 g/m² - B1



SKIRT PLEAT FINISH

Code Length

360023	20 x 100 cm
360024	40 x 100 cm
360025	60 x 100 cm
360026	80 x 100 cm
360027	100 x 100 cm
360028	20 x 200 cm
360029	40 x 200 cm
360030	60 x 200 cm
360031	80 x 200 cm
360032	100 x 200 cm

Polyester 160 g/m² - B1





Photographer: Sjo van Vliet



Tube	118
Booth82	119
Truss Dolly	120
Base Plate Dolly	121
Vario Dolly	122
Crate Dolly	123
Stage Dolly	124
Railing Dolly	125





TUBE


Code	Length
225001	50 cm
225002	75 cm
225003	100 cm
225006	150 cm
225004	200 cm
225007	250 cm
225005	300 cm
225008	400 cm



Ø 48.3 x 3

TOP CIRCLE M29S + M39S


229003

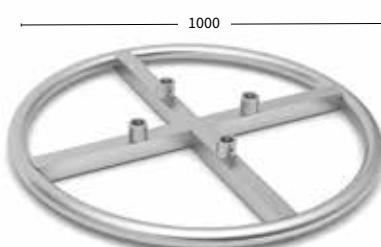

Excluding accessories

CUBE M BLACK

202445

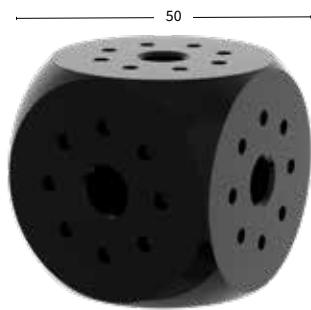

TUBE CONICAL COUPLER

Code	Length	Weight
221001	50 cm	0.75 kg
221002	75 cm	0.98 kg
221003	100 cm	1.33 kg
221006	150 cm	2 kg
221004	200 cm	2.48 kg
221007	250 cm	3.03 kg
221005	300 cm	3.63 kg
221008	400 cm	4.78 kg



Ø 48.3 x 3

TUBE CONICAL COUPLER BLACK

Code	Length	Weight
221201	50 cm	0.75 kg
221202	75 cm	0.98 kg
221203	100 cm	1.33 kg
221206	150 cm	2 kg
221204	200 cm	2.48 kg
221207	250 cm	3.03 kg
221205	300 cm	3.63 kg
221208	400 cm	4.78 kg



Ø 48.3 x 3






WHY BOOTH82?

- Very compact & light
- Beautiful appearance
- Multi-useable
- Is used in combination with STAGE82
- Easy to transport
- Easy to assemble (one man's job)

BOOTH82
700134

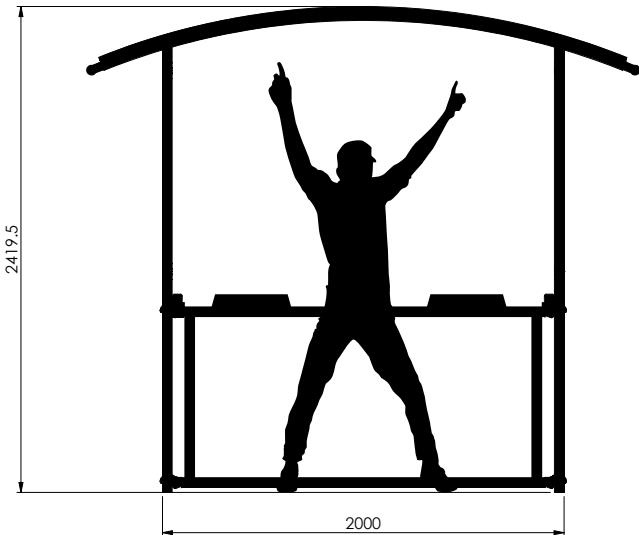



Truss Dolly



TRUSS DOLLY

Code	Type	Weight
215005	290	6.5 kg
215006	390	7.3 kg



STACKING BAR DOUBLE

Code	Type	Weight
215003	M29	1.8 kg
215004	M39	2.5 kg



STACKING BAR

Code	Type	Weight
215001	M29	0.5 kg
215002	M39	0.7 kg





BASE PLATE DOLLY

215011



For 6 baseplates 80 cm round

BASE PLATE DOLLY

215012



For 6 baseplates 80 cm square



All measurements are in mm

SIXTY82

121



Vario Dolly

VARIO DOLLY 4-3H

215007



Hanging bars not included

TUBE

215015



SUSPENSION BRACKET

215017



TOP CRATE

215010



VARIO DOLLY 4-4H

215008



Hanging bars not included


LOCKING PIN

215014



CRATE

215016

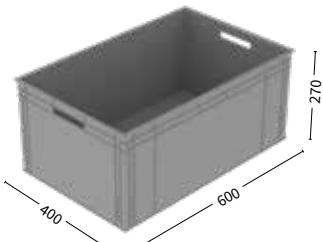

CRATE DOLLY

215009



Incl. 9 crates

WHY crate dolly


215009

- Easy on the road storage system
- Endless possibilities
- Can be ordered in many possible configurations
- Crates can not fall out during transport (locking system)
- Available with handles
- Top crate and countertop available
- Including wheels and brakes-system
- Size of DOLLY: from 1x2 till 4x4 crates
- Different size and type of crates
- Light in use



Scan the QR-Code

to watch the Crate Dolly
technical video

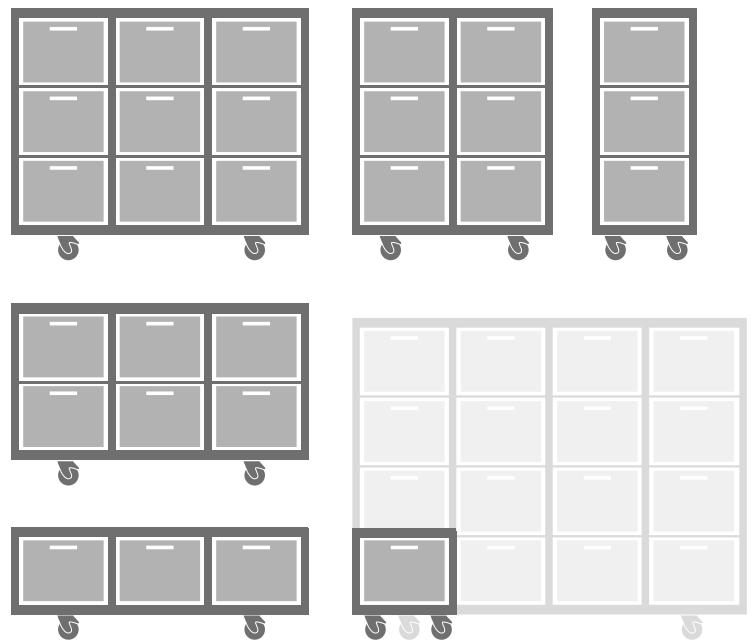



Stage Dolly

STAGE DOLLY

215018

48.5 kg



For 12 stage modules M

STAGE DOLLY

215020

41.9 kg



For 6 stage modules M






RAILING DOLLY

215022

52.8 kg

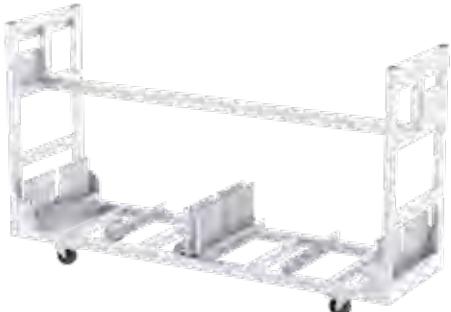

For railing 30 kg/m



Accessories not included

INFERNO®:

The Heat Resistant Soft Sling

The INFERNO® soft sling is made of 100% aramid fibre and therefore ultra heat resistance. The nature of the fibre provides a sling that is extraordinary flexible and therefore much easier to handle compared to a soft steel particularly when slinging truss. The label is movable along the sling and will therefore no longer interfere with proper choking or wrapping of truss chords.

The INFERNO® has a WLL of 2000 kg and comes in standard length of 50 cm, 100 cm, 150 cm and 200cm.



Features

- Maintains its strength up to 200 °C(!)
- Easy to position
- Minimum bending radius 6 mm
- Soft, supple, light weight and easy to handle
- Improves workflow
- High abrasion resistance
- Environmentally friendly due to the long-life span
- Creates safer lifting conditions
- Easy to inspect
- Made in The Netherlands
- Custom working loads and lengths optional

Article code	Description
241050	Inferno Soft sling 50 cm WLL 2000kg
241051	Inferno Soft sling 100 cm WLL 2000 kg
241052	Inferno Soft sling 150 cm WLL 2000 kg
241053	Inferno Soft sling 200 cm WLL 2000 kg










Scan the QR-Code

for more information


User information

Suggested slinging methods

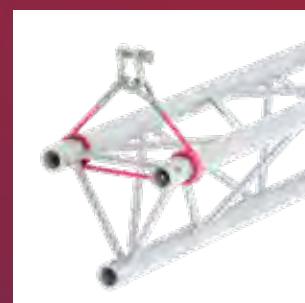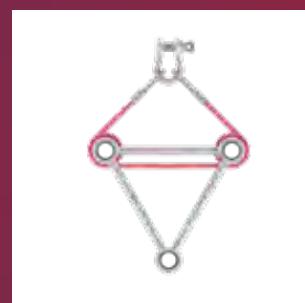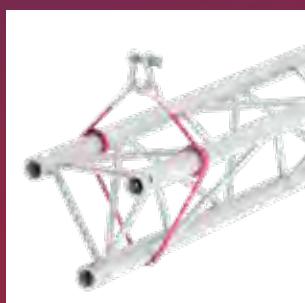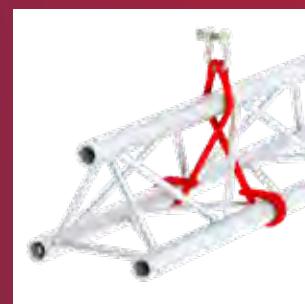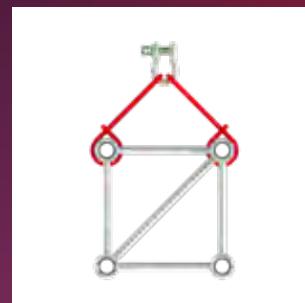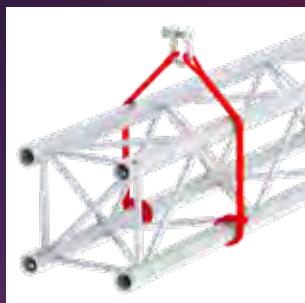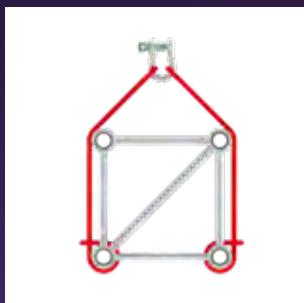


Ladder truss

These need special attention for slinging. Stabilisation of the top chord is vital for the load capacity. Only the bottom chord shall be loaded. Other load applications need structural analysis before use.

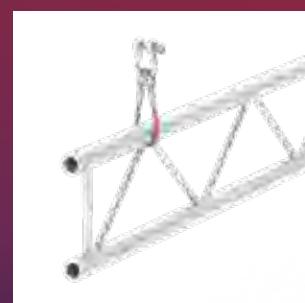

Slinging shall be applied solely at the main chords, not at the couplers or internal braces unless approved by a chartered engineer. Slinging shall be applied at node point, or as close as possible aside end braces, diagonals, and horizontal cross braces. Slinging equipment shall be made from non-abrasive and fire retardant materials.


For further information, please refer to the SIXTY82 original user manual.

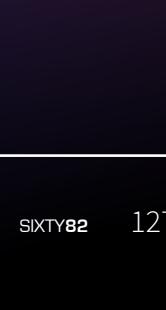



Data Center

Type	Coupler type	Truss height	Truss width	Material	Cross section tubes				Dead weight	RFID		
					Main chord		Diagonals					
					A mm	B mm	∅ mm	≠ mm				
TPM29T	Model M	207	239	EN AW 6082 T6	48.3	3	17x14	2.45/1.7	5.5			
TPM29S		239	239		48.3	3	17x14	2.45/1.7	6.4			
(TP)M29L		239	0		48.3	3	16	2	3			
M29T		207	239		48.3	3	16	2	5			
M29TX		207	239		51	2	16	2	4	✓		
M29S		239	239		48.3	3	16	2	6.3			
M39S (MB)		339	339		48.3	3	16	2	6.9			
M39R		339	239		48.3	3	16	2	6.9			
M39TOW		339	339		50	4	25	3	12			
L35S	Model L	299	299		50	4	30	3	12			
L35R		299	207		50	4	30	3	11			
L52S (MB)		470	470		50	4	30	3	15	✓		
XL53TOW		470	470		60	5	30	3	17.5			
XL101R		950	520		60	6	48.3	3	25			
XL101F		950	520		60	6	48.3	3	25	✓		

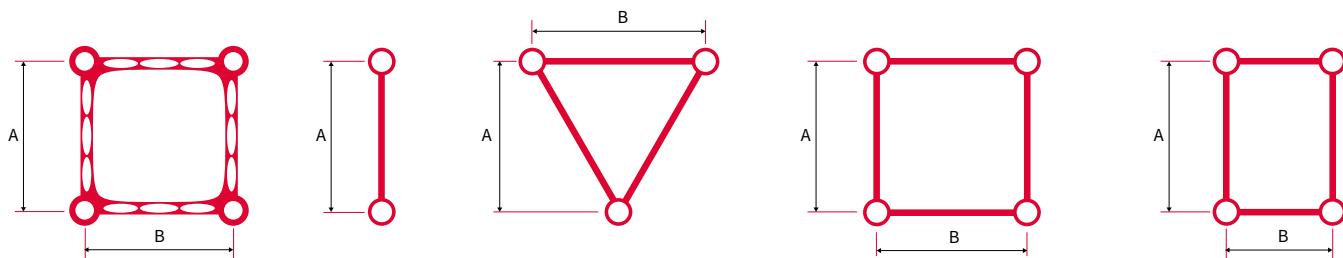


Type	Cross section truss					Permissible internal forces truss				
	A cm ²	Iy cm ⁴	Iz cm ⁴	iy cm	iz cm	Bending moment		Normal force	Transversal force	
						My kNm	Mz kNm	N kN	Vy kN	Vz kN
TPM29T	12.81	1252.60	1252.37	9.89	9.89	12.19	14.08	176.70	16.02	18.5
TPM29S	17.08	2482.74	2482.74	12.06	12.06	25.83	25.83	216.19	18.5	18.5
(TP)M29L	8.54	1055.16	22	11.12	1.61	12.08	-	101.1	-	7.36
M29T	12.81	1064.71	1064.71	9.12	9.12	10.46	12.08	151.65	7.36	12.76
M29TX	9.24	771.16	771.01	9.14	9.14	7.55	8.71	109.36	12.76	7.36
M29S	17.08	2110.33	2110.33	11.12	11.12	24.16	24.16	202.2	14.73	14.73
M39S	17.08	4207.89	4207.89	15.7	15.7	34.27	34.27	202.2	18.94	18.94
M39R	17.08	4207.89	2110.33	15.7	11.13	34.27	24.16	202.2	18.94	14.73
M39TOW	23.12	5698.96	5500	15.7	15.42	36.06	36.06	212.77	40.22	40.22
L35S	23.12	4445.05	4445.05	13.87	13.87	40.93	40.93	273.77	45.48	45.48
L35R	23.12	4445.05	1750	13.87	8.7	40.93	-	273.77	-	45.48
L52S	23.12	10906.19	10906.19	21.72	21.72	64.33	64.33	273.77	42.61	42.61
XL53TOW	34.6	16334	16334	21.74	21.74	96.15	96.15	409.16	42.61	42.61
XL101R	40.72	78211.52	23522.57	43.83	24.04	224.32	122.79	472.26	42.54	90.48
XL101F	-	78211.52	-	43.83	-	224.32	-	472.26	-	86.61

Our network

SIXTY82

APAC	Malaysia
Australia	Mongolia
Azerbaijan	Myanmar
Bangladesh	Nepal
Belgium	New Caledonia
Bhutan	New Zealand
Brunei	Norway
Cambodia	Oman
Canada & USA	Pakistan
China	Papua New Guinea
Croatia	Philippines
Denmark	Portugal
Estonia	Russia
Finland	Saudi Arabia
France	Serbia
Germany	Singapore
Greece, Cyprus	South Korea
Hungary	Spain
Hong Kong	Sri Lanka
India	Sweden
Indonesia	Switzerland
Ireland	Taiwan
Italy	Thailand
Japan	The Netherlands
Kazachstan	Turkey
Laos	Ukraine
Luxembourg	United Arab Emirates
Latvia	United Kingdom
Lithuania	Vietnam
Macau	



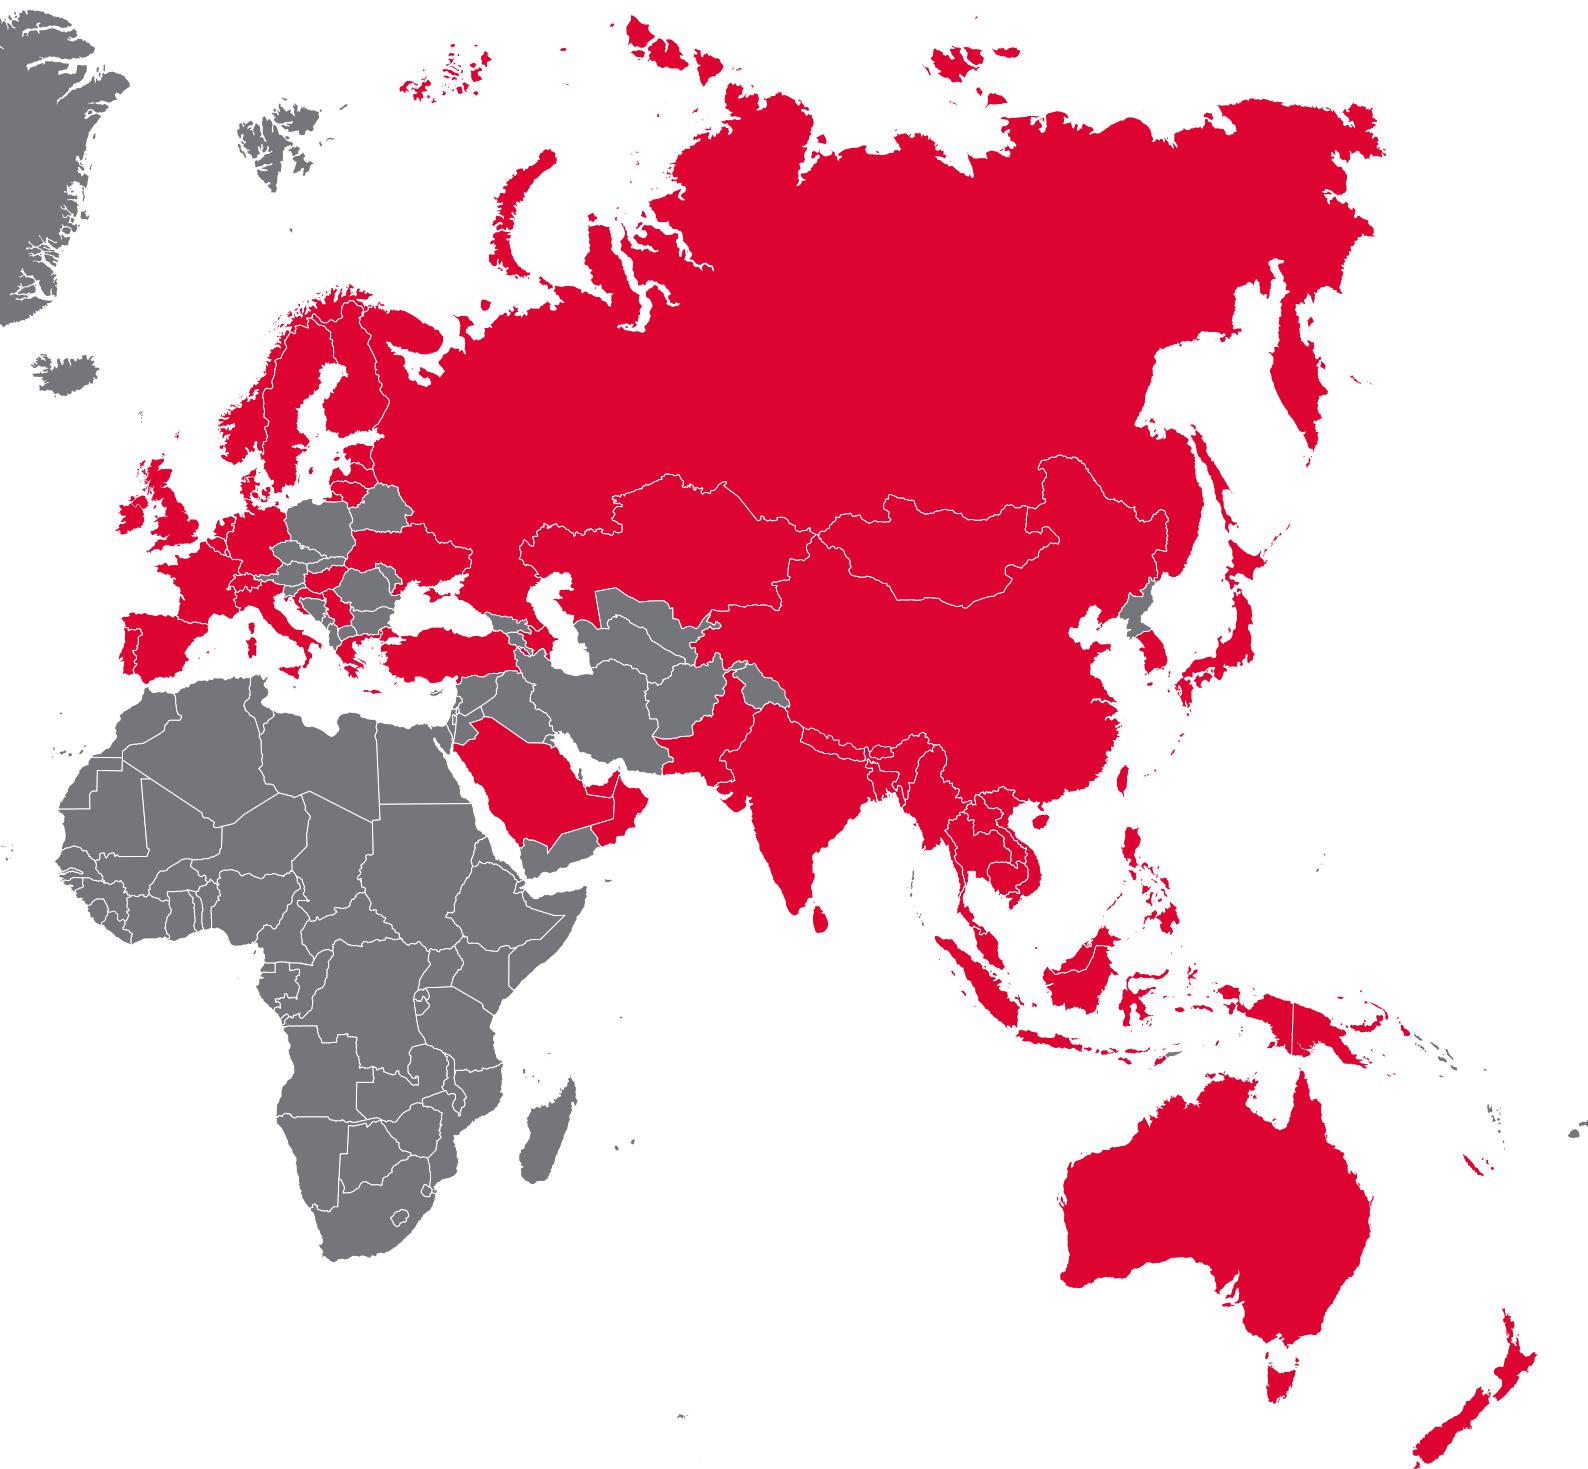



Addresses

SIXTY82™

Official SIXTY82 offices

SIXTY82-NL

Headquarters

Ampèrelaan 9
9207 AM Drachten
The Netherlands

Phone: +31 88 13 422 00
Email: info@SIXTY82.nl

APAC

SIXTY82 Doughty Asia

Lot 59-1, Jalan 51/205
46050, Petaling Jaya, Selangor
Phone: +603 7781 3357/3552
Mail: info@sixty82-doughty.com

Japan

SIXTY82 Doughty Japan

332-0012 埼玉県鶴ヶ島市1-15-7
Honcho, Kawaguchi Shi,
Saitama 332-0012 Japan
Phone: +81 3 6912 9720

Please inform our website for
the latest updates about our
distribution network

Network

Azerbaijan

Mediatech LLC

Salamzade str. 2D
AZ1078
Bakoe
Phone: +994 124 347 856
Mail: office@mediatech.az

Denmark

European Tour Production ApS

Stamholmen 93
2560 Hvidovre
Phone: +45 3630 7080
Mail: sixty82@etp.nu

Estonia

Progear OÜ

Artelli 19
EE-10127
Tallinn
Phone: +372 6728 280
Mail: progear@progear.ee

Finland

Electro Waves Oy

Headoffice
Ruukintie 2
02330 Espoo
Phone: +20 1200 100
Mail: info@electrowaves.fi

France

Axente

1, all.e d'Effiat,
91160 Longjumeau
Phone: +33 1691 05076
Mail: sixty82@axente.fr

Canada & USA

Theatrixx Technologies

1655 Richardson, H3K 3J7
Montreal, Cuébec
Phone: +1 514 933 0077
Mail: info@theatrixx.com

Croatia

Perinic Sistemi

Vrhovec 28,
10000, Zagreb
Phone: +385 1 3778 283
Mail: vinko@perinic-sistemi.hr

Germany

CAST C.ADOLPH & RST DISTRIBUTION

Official competence centre

Kabeler Str. 54a
D-58099 Hagen
Phone: +49 2331 691500
Mail: mail@castinfo.de

Edelmat. GmbH

Veranstaltungstechnik

Eichborndamm 167, Geb.ude 55
13403 Berlin
Phone: +49 3076 7373200
Mail: SIXTY82@edelmat.de

MH-Lights®, Dipl.-Kfm. Martin Huber

Gusso-Reuss-Str. 4
82296 Schöngesing
Phone: +49-(0)8141-44154
Mail: info@mhlights.de

BTH.GbR

Auf dem Kalköfele 5
89597 Munderkingen
Phone: +49 7393 4081440
Mail: SIXTY82@BTHG.de

Rigging Plus GmbH

Werner-Otto-Straße 26
22179 Hamburg
Phone: +49 40 6085 0065
Mail: info@riggingplus.com

Greece, Cyprus

Omkron Electronics

Dervenion 31 & Posidonos
14451, Metamorfosi Attica
Phone: +30 211 3009200
Mail: info@omikron.gr

Hungary

DP Music

Gy.r u.2.
H-2040-Buda.rs
Phone: +36 2388 6980
Mail: info@dpmusic.hu

Ireland

A.C. Entertainment Technologies

Ireland Ltd.
Coliemore House, Coliemore Road,
Dalkey, Dublin
Phone: +3538 7460 0202
Mail: sales@ac-et.ie

Italy

Audiosales s.r.l.

Via Ugo Bianchi 23
43058 Sorbolo (PR)
Phone: +39 0521 690290
Mail: info@audiosales.it

Kazachstan

AMEG Group

Yanushkevich 7/2
010000
Astana
Phone: +7 701 344 44 33
Mail: info@ameg.kz

Latvia

JSA Europe / Stage Company

Headoffice
Lielirbes iela 1, office B- 212
Riga LV-1046
Phone: +37 1277 74848
Mail: welcome@jsa-stage.company

Lithuania

Scenos Techninis Servisas

Aukštaičių str. 6
11341 Vilnius
Phone: +37 0527 52219
Mail: mail@sts.lt

Luxembourg

Codex Events S.A.

36, rue d'Oetrange
L-5411 Canach
Phone: +35 2264 83333
Mail: info@codex.lu

Norway

First Audio

Haavard Martinsens vei 19 A
0978 Oslo
Phone: +47 4000 5166
Mail: info@firstaudio.no

Oman

Unusual Rigging & Engineering LLC

PO Box 283586
Dubai, UAE
Phone: +971 4885 9009
Mail: dubai@unusualrigging.com

Portugal

SET2STAGE

Rua Gomes de Amorim n. 1158,
4490-091 - P.voa de Varzim
Phone: +35 1910 271125
Mail: marcosdematos@set2stage.pt



Addresses

SIXTY82™

Russia

STAGEMARKET

Business Center NEO GEO, 5th Floor
117342, Butlerova street 17
Phone: +7 495 640 45 45
Mail: info@stagemarket.ru

Switzerland

CAST

Route de Chavalon Z.I. C 77
1844 Villeneuve VD
Phone: +41 2196 56000
Mail: mail@castinfo.ch

UAE

Unusual Rigging & Engineering LLC

PO Box 283586
Dubai
Phone: +971 4885 9009
Mail: dubai@unusualrigging.com

Saudi Arabia

Unusual Rigging & Engineering LLC

PO Box 283586
Dubai, UAE
Phone: +971 4885 9009
Mail: dubai@unusualrigging.com

The Netherlands

DANKQ

Ampèrelaan 9
9207 AM Drachten
Phone: +31 85 303 71 45
Mail: sales@dankq.nl

United Kingdom

A.C. Entertainment Technologies

Headoffice
Centauri House, Hillbottom Road,
High Wycombe, Buckinghamshire.
HP12 4HQ
Phone: +44 1494 446000
Mail: sixty82@ac-et.com

A.C. Entertainment Technologies

Leeds Office (Northern UK Sales)
Hawsworth Commercial Centre,
Elder Road, Leeds, West Yorkshire.
LS13 4AT
Phone: +44 1132 557666
Mail: sixty82@ac-et.com

Production Park

5 Langthwaite Road
Langthwaite Business Park
South Kirkby, Wakefield
West Yorkshire WF9 3AP
Mail: info@sixty82.nl

Serbia

PSP Elektronik

Bulevar Jovana Ducica 39
21000 Novi, Serbian
Phone: +381 21 520 907
Mail: office@psp.co.rs

Moonbears

Zinkstraat 9
4823 AD Breda
Phone: +31 76 587 23 95
Mail: hello@moonbears.eu

SENCI

Nijverheidsweg 20
7671 DA Vriezenveen
Phone: +31 8530 36597
Mail: info@senci.nl

Spain

Stonex

Cuclillo Street 5
28019 Madrid
Phone: +34 9142 81050
Mail: stonex@stonexsl.com

Turkey

Modern Elektronik A.Ş.

Aydın Sok. No. 10
34340
Beşiktaş, İstanbul
Phone: +90 (212) 385 47 47
Mail: info@modern.com.tr

Sweden

Electro Waves Oy filial Sverige

Åkerby 4
645 94 Strängnäs
Phone: +46 070 7311444
Mail: info@electrowaves.eu

Ukraine

JSA Europe / Stage Company

Yevhena Konovaltsia st. 103
office 414 L'viv, 79000
Phone: +38 0443 614848
Mail: welcome@jsa-stage.com

Notes



Notes

SIXTY82™

Credits

Author: Rainier Smeding

Catalogue design: Tieme Dekker

With contributions from NL, FR and UK with love

PVersion: V24.3

© 2024 SIXTY82, Drachten NL

All rights reserved. No part of this publication may
be reproduced in any manner without permission.

The information in this catalogue is subject to
printing mistakes and/or product modifications.
All colour printings are to be regarded as an
indication and may be changed at any time
depending on production necessities.

 <https://www.facebook.com/SIXTY82>

 www.SIXTY82.nl



Sixty82 BV
Ampèrelaan 9 | 9207 AM Drachten | The Netherlands
+31 88 13 422 00
info@sixty82.nl
www.sixty82.nl

The Innovators