



15.0 Kg/m

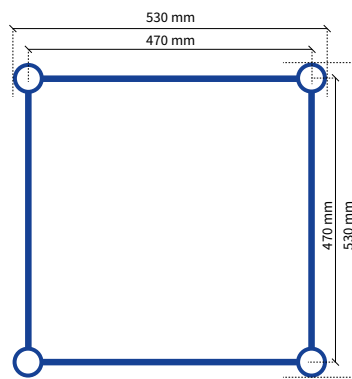

(RFID)

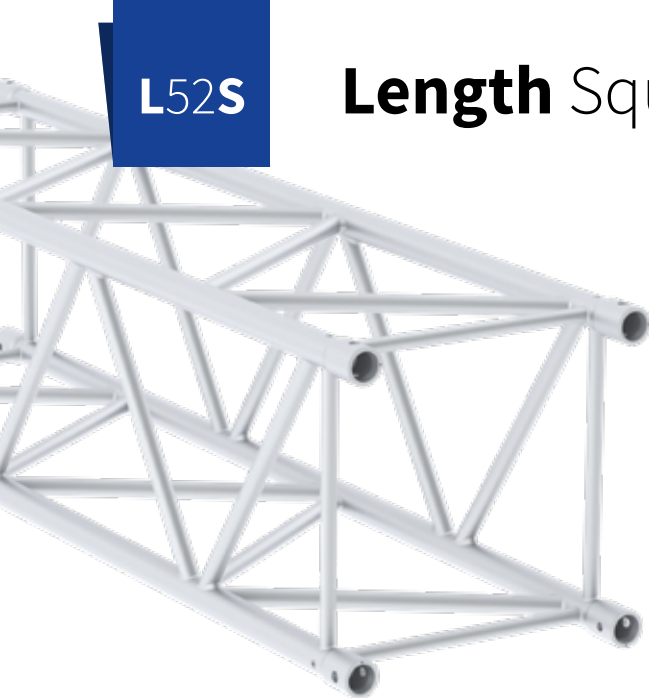

L



P.100



ALU/BLACK

Square - L52S

Code Length

161001	50 cm
161002	60 cm
161003	80 cm
161004	100 cm
161005	120 cm
161006	150 cm
161007	200 cm
161008	240 cm
161009	250 cm
161010	300 cm
161012	400 cm

 Load table L52S

Span	CPL	Deflection	2 x load	Deflection	3 x load	Deflection	4 x load	Deflection	UDL	Deflection
m	kg	mm	kg	mm	kg	mm	kg	mm	kg/m	mm
2.0	3735.9	2	2215.2	2	1611.5	2	1273.2	2	2827.1	2
6.0	1925.9	17	1245.2	22	1013.9	20	846.0	22	933.4	21
10.0	1296.6	47	877.7	60	725.7	56	559.1	60	329.6	59
14.0	953.6	92	663.6	117	517.3	109	407.2	117	161.6	115
18.0	731.5	152	519.7	194	389.2	180	310.7	194	92.4	190
20.0	646.0	187	463.2	239	341.1	222	273.8	239	72.3	234
22.0	571.9	227	413.7	290	300.1	269	242.1	290	57.4	283
24.0	506.8	270	369.7	345	264.4	320	214.3	345	46.1	337
26.0	448.6	317	330.1	404	232.9	376	189.6	404	37.3	396

 Cantilever load

Span	1 x Load	Deflection	UDL	Deflection
m	kg	mm	kg/m	mm
0.5	2418.3	0	5497.5	0
1.0	1862.0	0	2411.9	0
1.5	1467.1	2	1406.2	1
2.0	1246.3	4	925.7	2
2.5	1082.1	9	654.0	4
3.0	954.3	17	484.6	7
3.5	851.8	28	380.2	10
4.0	767.7	44	306.4	13

 Multiple supported span

Span	CPL	Deflection	2 x Load	Deflection	UDL	Deflection
m	kg	mm	kg	mm	kg/m	mm
2.0	3425.2	0	1808.2	0	2031.0	0
6.0	2016.4	5	1092.4	5	443.8	4
10.0	1443.8	18	787.8	16	193.3	14
14.0	1095.0	37	601.6	33	107.4	29
18.0	854.3	61	471.6	55	66.4	49
20.0	758.5	74	419.5	67	53.4	68
22.0	674.2	88	373.5	79	43.5	99
24.0	599.0	101	332.4	92	35.6	140
26.0	531.4	114	295.2	103	29.3	193

 Find complete loading tables on [SIXTY82.nl](https://www.sixty82.nl)

All loading data is based on calculations per EN-1999-1-1 and the following assumptions:

- Static loads only.
- Spans supported or suspended at both ends.
- Triangle trusses solely used apex-up, apex-down.
- 2 chords truss to be placed upright, supported from top chord and loaded from bottom chord.
- Truss spans can be constructed of elements of different length.

- Interaction between bending moment and shear force considered.
- Self-weight of truss is already considered.
- Assembled truss systems need an individual structural calculation. Please contact SIXTY82 or a structural engineer.
- Read the manual before use.
- Higher loading can be allowed depending on the truss configuration.