

Light efficiency:

90 Lumen/Watt

Light quality:

CRI: 98,1

Color temperature:


2650 K

Output: 3902 lm

Peak: 2175 cd

Power: 43,1 W

PF: 0,81



Tracking number: [{TRACK_NUM}](#)

Product name:

**Reflect Bi-color 2 - Foot 2 - Bank 2700K
No diffuser**

Item number:

Date and time:

27/01/2022 14.25.37


Description:

Measured in 12 planes

Maasured by Karsten Lindorff

2 - Foot 2 - Bank 2700K

No Diffusor

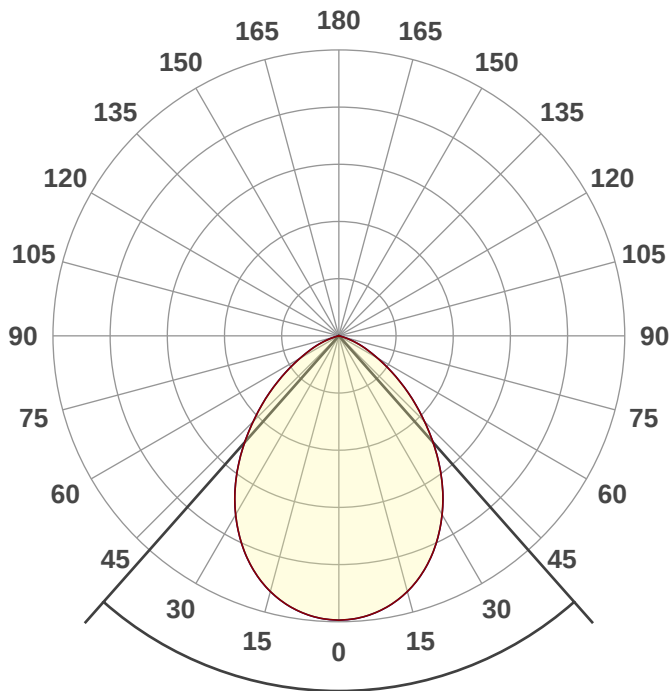

Beam angle

83°




CIE 1931


x: 0,465

y: 0,412



Spectra

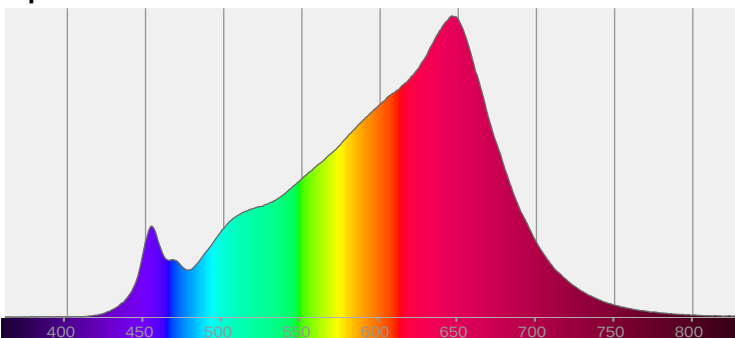


Power

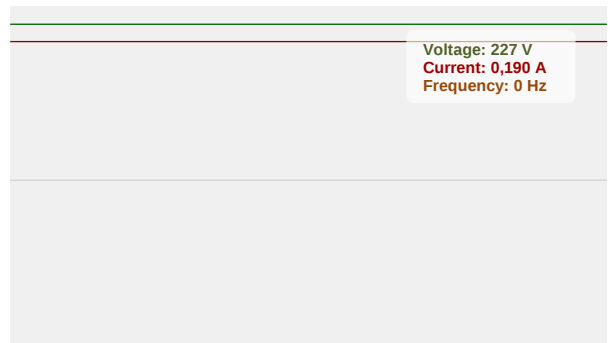


Voltage: 227 V
Current: 0,190 A
Frequency: 0 Hz

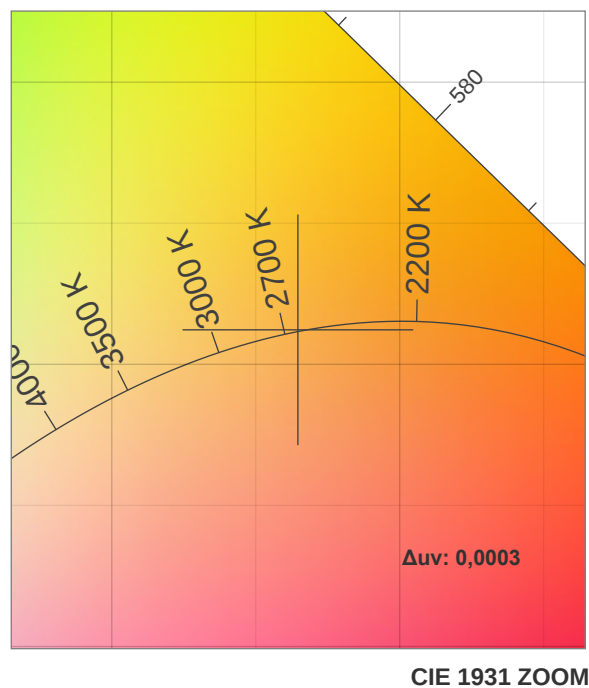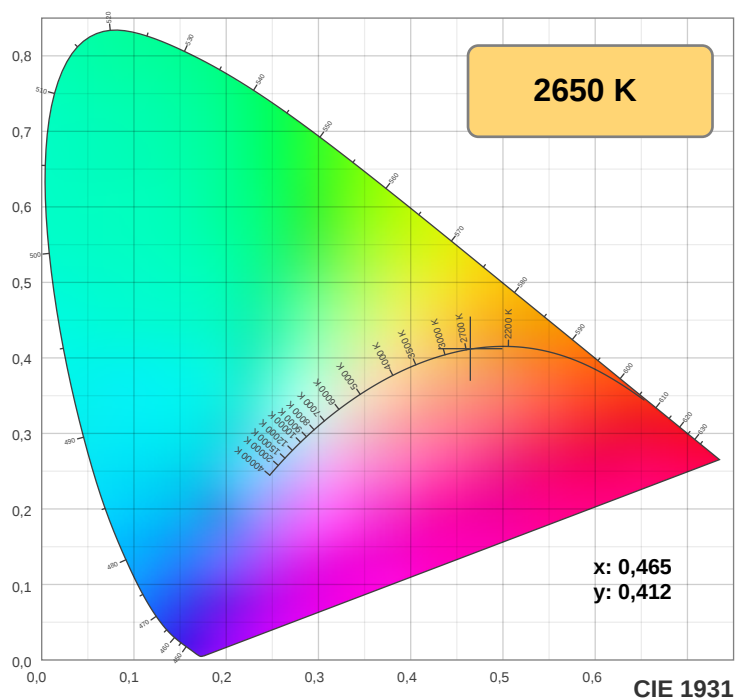

TM-30: 94,5

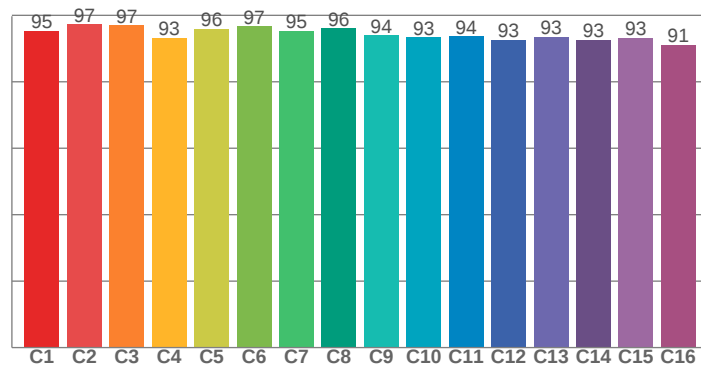

CRI: 98,1 (R1-R8)

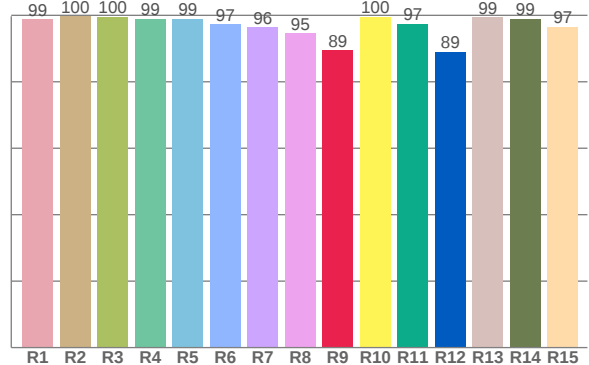

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
98,8	99,8	99,6	99,0	99,0	97,3	96,4	94,6	89,5	99,6	97,4	89,1	99,4	98,9	96,6


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
95,4	97,3	97,0	93,2	96,0	96,6	95,3	96,0	94,0	93,4	93,7	92,6	93,5	92,6	93,2	91,0

CQS Q values



Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
92,0	94,9	94,8	94,4	95,1	96,0	97,3	96,8	95,3	95,3	96,6	96,9	96,3	94,6	93,8


CQS: 95,0

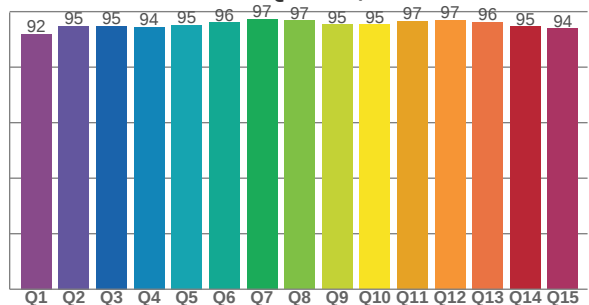

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
2650 K	98,1	89,5	94,5	99,1	95,0	0,465	0,412	0,265	0,352	0,0003

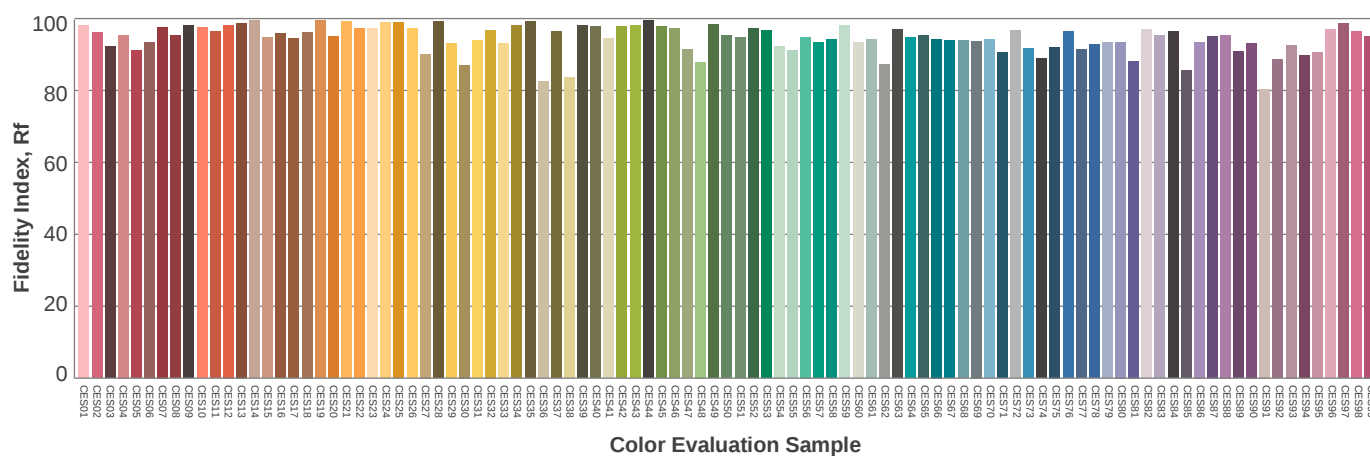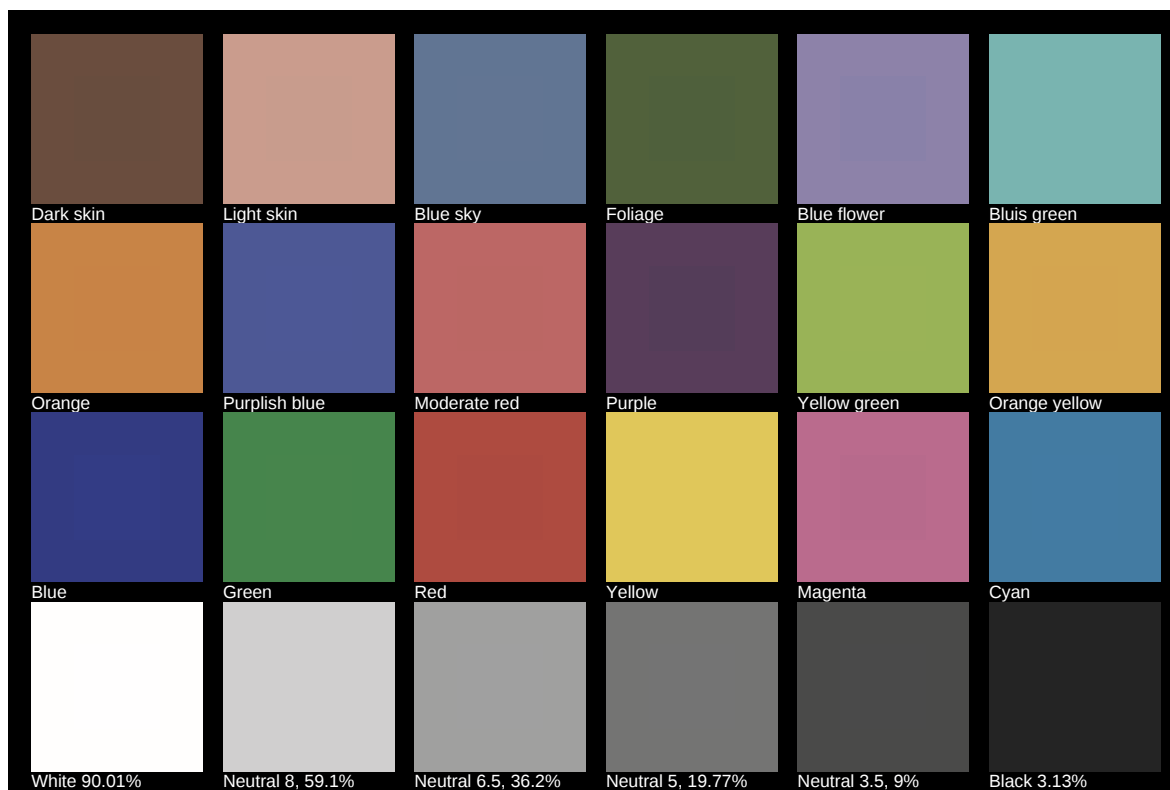

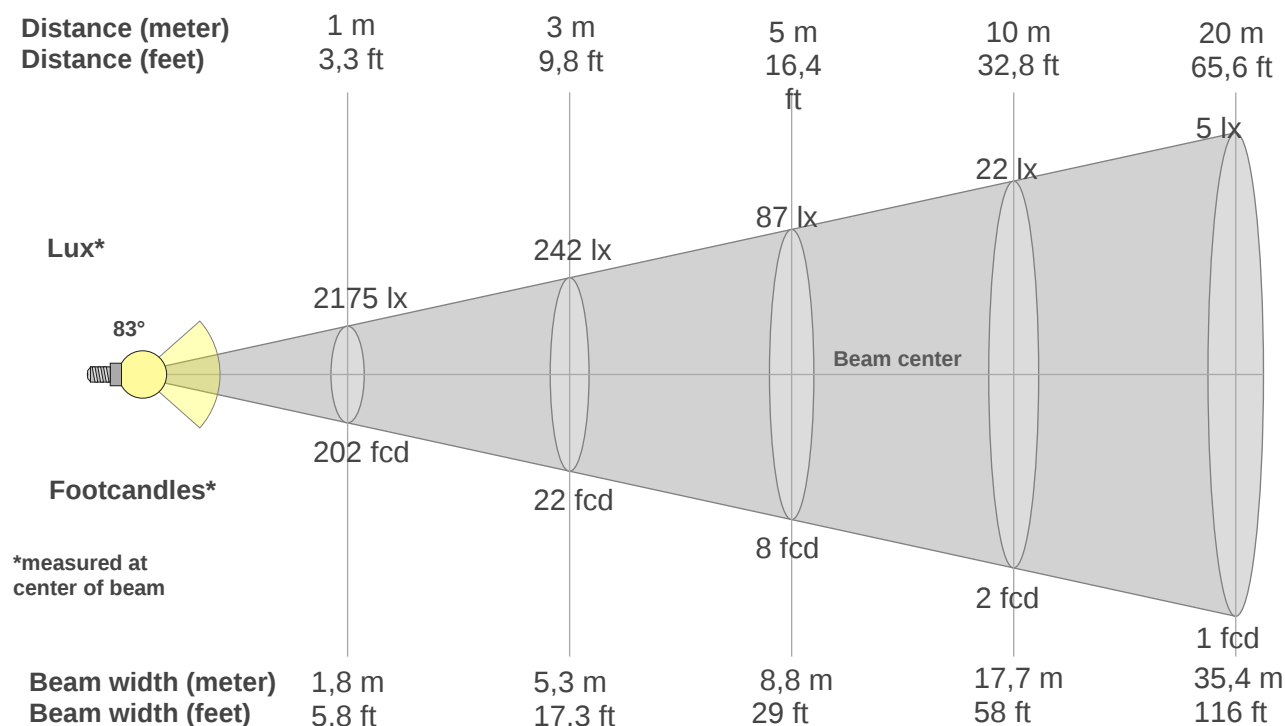
Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
2175lx	544lx	242lx	136lx	87lx	60lx	44lx	34lx	27lx	22lx	18lx	15lx	13lx	11lx	10lx	8lx	8lx	7lx	6lx	5lx
202fcd	50,5fcd	22,4fcd	12,6fcd	8,1fcd	5,6fcd	4,1fcd	3,2fcd	2,5fcd	2fcd	1,7fcd	1,4fcd	1,2fcd	1fcd	0,9fcd	0,8fcd	0,7fcd	0,6fcd	0,6fcd	0,5fcd

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
2175	2158	2108	2025	1908	1758	1579	1378	1156	927	713	514	343	215	106	29	12	7	4	4
100%	99%	97%	93%	88%	81%	73%	63%	53%	43%	33%	24%	16%	10%	5%	1%	1%	0%	0%	0%

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
2175	2158	2108	2025	1908	1758	1579	1378	1156	927	713	514	343	215	106	29	12	7	4	4
100%	99%	97%	93%	88%	81%	73%	63%	53%	43%	33%	24%	16%	10%	5%	1%	1%	0%	0%	0%


Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
2175	2158	2108	2025	1908	1758	1579	1378	1156	927	713	514	343	215	106	29	12	7	4	4
100%	99%	97%	93%	88%	81%	73%	63%	53%	43%	33%	24%	16%	10%	5%	1%	1%	0%	0%	0%

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
2175	2158	2108	2025	1908	1758	1579	1378	1156	927	713	514	343	215	106	29	12	7	4	4
100%	99%	97%	93%	88%	81%	73%	63%	53%	43%	33%	24%	16%	10%	5%	1%	1%	0%	0%	0%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
83°	129,8°	145,6°	92,6%	72,4%

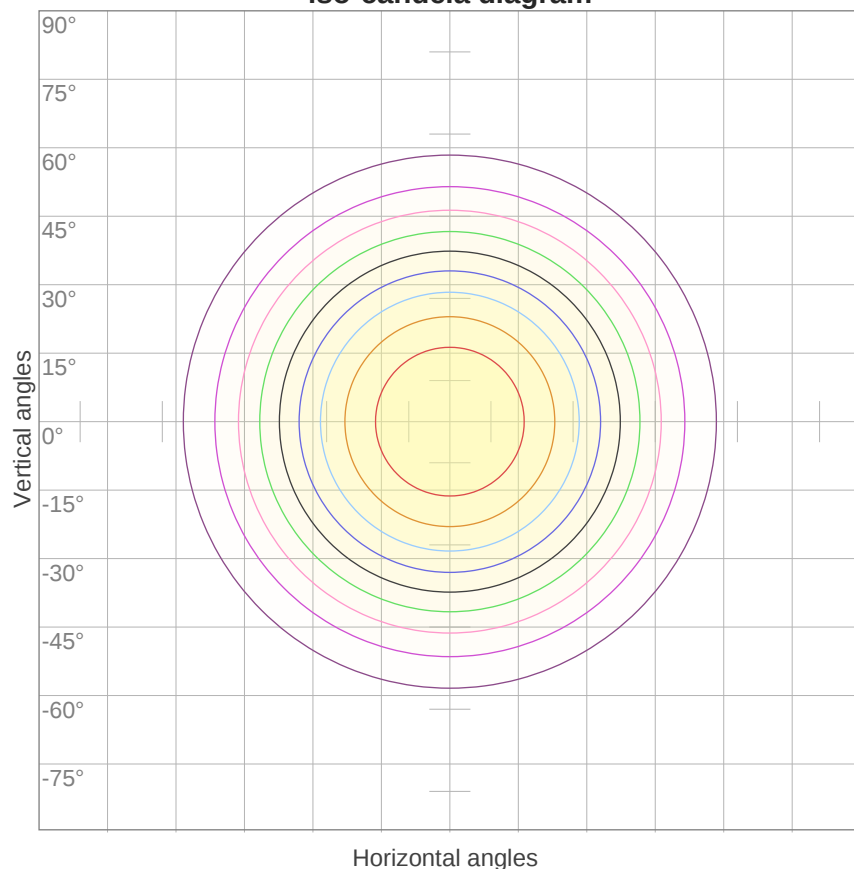
iso-candela diagram


10%	217 cd
20%	435 cd
30%	652 cd
40%	870 cd
50%	1087 cd
60%	1305 cd
70%	1522 cd
80%	1740 cd
90%	1957 cd

Conditions:

Number of c-planes: 24

Candela at center: 2175 cd

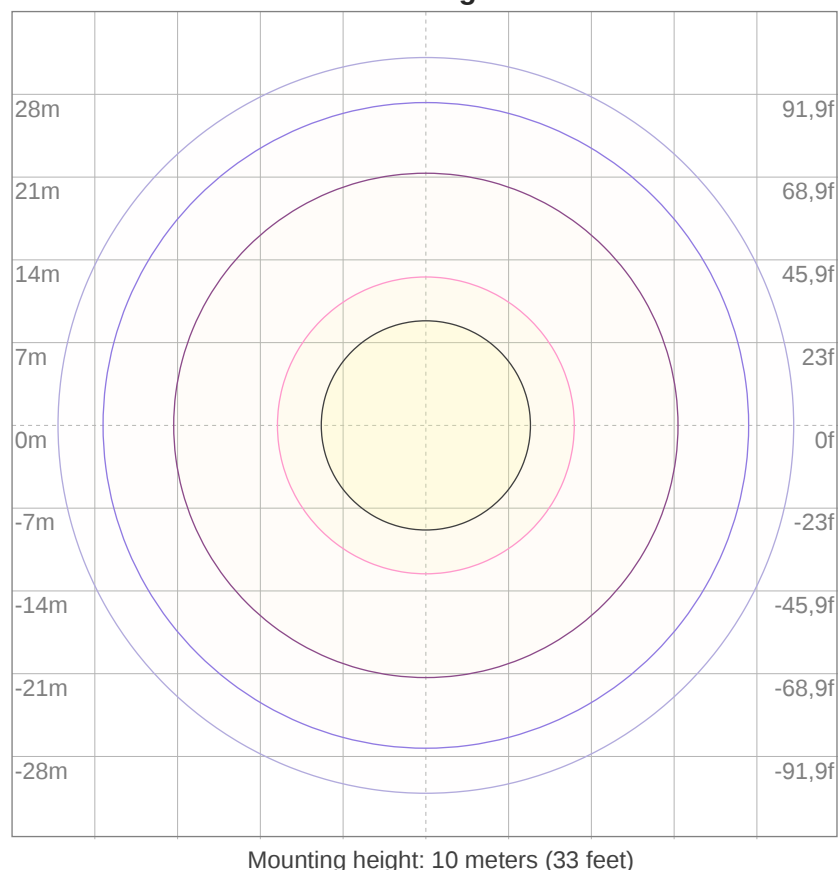iso-lux diagram


3%	0,652 lx
5%	1,09 lx
10%	2,17 lx
30%	6,52 lx
50%	10,9 lx

Conditions:

Number of c-planes: 24

Lux at center: 21,7 lx

*Lux distribution on a surface
when lamp is mounted at 10
meters from the surface.*