NEOPLAYBACKCONTROLLER



Adding to our NEO family of products is the NEO Playback Controller. This rack-mount device is designed to store and run preprogrammed shows using the same powerful NEO Lighting Control Console operating system software. The NEO Playback Controller can sit on a LAN or operate independently for theatre, themed entertainment productions and more.

We think you will find the NEO Playback Controller a worthy successor to a proud history of iconic consoles that have had the honor of bearing the Strand name.





NEOPLAYBACKCONTROLLER

FEATURES

- Up to 100 Universes of DMX per Console
- Touchscreen capable interface
- Unlimited Cues, Cue Lists, Groups, Palettes, Effects, and Macros
- Tracking, Cue Only and Hybrid Tracking Programming
- Flexible Shortcut System
- Generic Palettes
- Time Line Effects
- Pixel Mapping
- Media Playback
- Multi-User
- Tracking Backup
- User security system (login)
- Timed Events with sunrise/sunset
- Telnet Interface
- Undo History
- Visual Timecode Editor
- Power Monitor
- Color and Position Paths per Cue
- Blind Pre-Visualization
- Magic Sheet Layout
- 4 DMX Out Ports / 1 DMX In Port / 2 Network Ports
- 3 Video Outs (HDMI / VESA Display Port / DVI)
- MIDI Out / In
- SMPTE Out / In
- USB 3.0 and USB 2.0 Ports
- 2 COM Ports
- Audio Connections Mic In / Audio OutStrand Advantage DMX

NEOPLAYBACKCONTROLLER

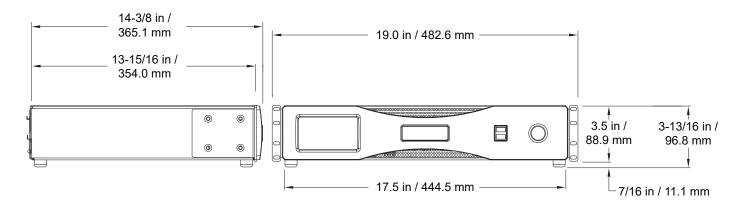

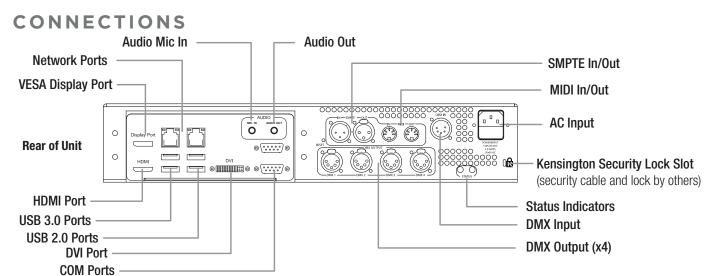

| POWER | |
|--------------------|------------------------------|
| Range | 100-240VAC |
| Current | 3.0A |
| Frequency | 50 / 60 Hz |
| DATA CONNECTIONS | |
| 5-pin DMX | 4 out / 1 in |
| Network ports | 2 |
| MIDI | In / out |
| SMPTE | In / out |
| VESA display port | 2 |
| RJ45 network ports | 2 |
| Audio line | In / out / mic via 1/8" mini |
| USB 3.0 | 4 on rear panel |
| Audio | Mic in / out |

NEOPLAYBACKCONTROLLER

| PHYSICALS | | | | |
|-------------------------|-------------|---|-------------------|--|
| Finish | | Black | | |
| Construct | on | High density and impact resistant aluminum and plastics | | |
| ENVIRONMENT | | °C | °F | |
| Operating | temperature | 0-40 | 32-104 | |
| Storage to | emperature | 0-35 | 32-95 | |
| Humidity | | 0-95% non-condensing | | |
| DIMENSIONS | | mm | in | |
| HxWxD | | 482.6 x 96.8 x 365.1 | 19 x 3.81 x 14.34 | |
| WEIGHT | | kg | Ib | |
| Net weigh | t | 4.56 | 10.05 | |
| WARRANTY & APPROBATIONS | | | | |
| Warranty | | 2 years | | |
| Approvals | / Listings | cETLus, CE, C-Tick | | |

| PRODUCT NAME | ORDER CODE |
|-------------------------|------------|
| NEO Playback Controller | 91006 |

© 2018 Signify Holding. All rights reserved.

All trademarks are owned by Signify Holding or their respective owners. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Data subject to change.

Ref: 91006-100-00