


XVVFIBER2SDIT1-12G



Overview

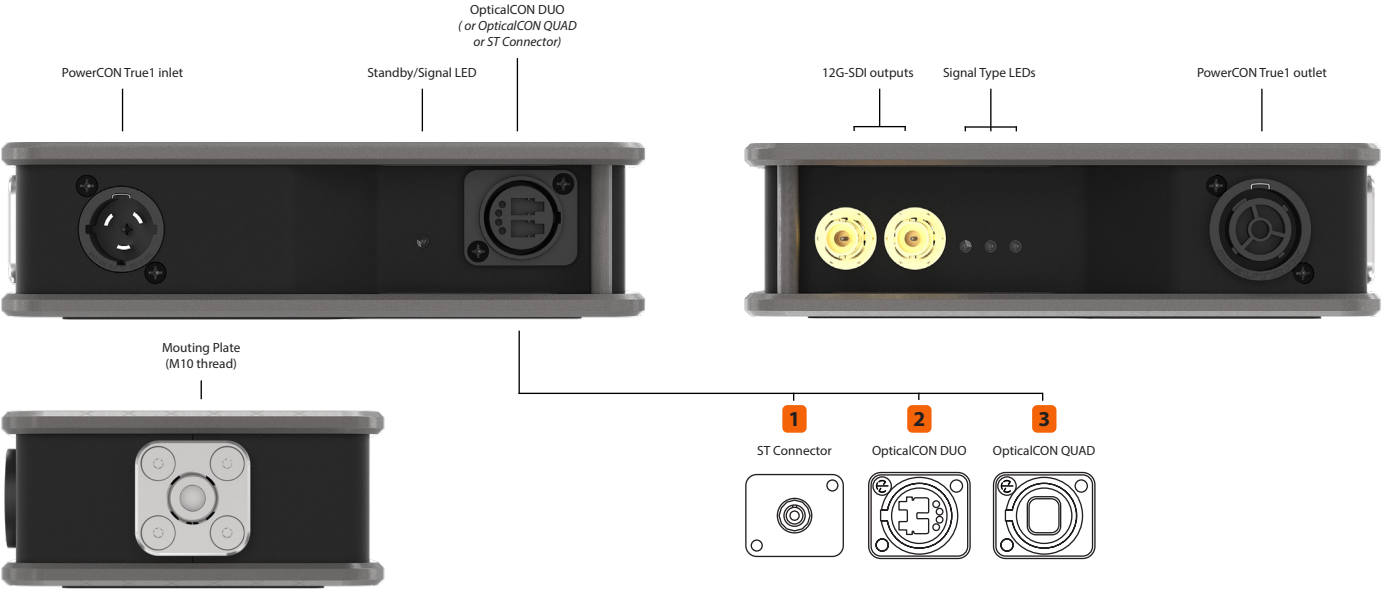

Connections

| | |
|--------------|---|
| Video Input | Choice of Multimode or Singlemode Choice of Optical SDI on ST, OpticalCON DUO or OpticalCON QUAD (see ordering information) |
| Video Output | 2 x 12G/6G/3G/HD/SD SDI BNC |

Supported Signals

| | |
|----------------------|---|
| Video Format Support | 12G/6G/3G-SDI Level A and B, HD-SDI, SD-SDI with embedded audio |
| SMPTE Standards | 2082-1, 2082-10, 425 M Level A & B, 424 M, 292 M, 259 M |

Physical Specifications

| | |
|-----------------------|---------------------------------------|
| Height | 50 mm (1.97 in) |
| Depth | 180 mm (7.08 in) |
| Width | 107 mm (4.21 in) |
| Weight | 1 kg (2.2 lbs) |
| Alternate Form Factor | Also available as a Reversible Module |

Environmental Specifications

| | |
|-----------------------|--------------------------|
| Relative Humidity | 0% to 90% non-condensing |
| Operating Temperature | 0-40 °C |

Power Requirements

| | |
|-------------------|--|
| Power Supply | Built-in power supply PowerCON True1 input PowerCON True1 output (loop-thru) |
| Power Consumption | 15W |
| Voltage Range | 100-240V, 50-60Hz (100-120V, 50-60Hz available with PowerCON/ Edison Nema 5-15) |
| Courtesy Outlet | Max 10A, same voltage as input |

In the Box

xVision Converter Fiber to 12G-SDI True1
AC Mains to PowerCON True1 cable (1.5m, specify plug type at ordering)

Certifications & Compliance

This device complies with the following international standards

