DESIGNED AND MANUFACTURED IN CANADA BY THEATRIXX 🛊

xVision Converter

HDBaseT to HDMI - True1

XVVHDBT2HDMIT1

HDBT — (B) destination point



heatrixx



Professional equipment in mission-critical applications is all about reliability and confidence. So we started with a clean sheet, and built what might soon become your most trustworthy piece of equipment.

Introducing the world's first video converters truly designed for the road. Video converters nowadays are used everywhere on profesionnal

A/V events, presentations, live shows and tours and often have a critical role. Yet, they are often the weakest link in the signal chain. Low quality connectors, weak enclosure, external consumer-grade power supply, and overall barebones design that all contribute to a generally unreliable piece of equipment. We wanted to change that, so we designed the xVision Video Converters.

Features

- Integrated power supply with locking PowerCON Connector. Never rely on a cluster of wall-warts again.
- > Built-in convenience AC outlet to power nearby projector, TV, laptop, small video projector... Power bar to power both the converter and device not required anymore.
- Magnetic stacking system and non-skid rubber pad for tabletop application. Saves at least 10 gaffer tape rolls a year.
- Multiple mounting options: C-Clamp, wall-mount adapter, LCD mount adapter and belt adaptor.
- Rugged, Tour-ready and aesthetic enclosure: The sexiest widget in your tool box, that will keep looking good for years to come.

- > **Plug-n-play operation**; No dipswitches, buttons or menus to fumble with: It just works.
- > Clear and ample status **LED indicators** for quick troubleshooting.
- > Easy on-the-field identification with unique color and alphabetic coding system.
- > **Locking HDMI & EtherCON ports** prevent accidental disconnection.
- > Fully compliant with HDBaseT 1.0 devices.
- Transmits 4K30P signals over up to 100 meters of CAT6 cable with HDCP support.
- Built-in Ethernet channel for projector control, LAN extension and more.
- > Proudly designed and assembled in Canada.

Ordering Information

XVVHDBT2HDMIT1 ... xVision Converter HDBaseT to HDMI True1

XVVHDBT2HDMI xVision Converter HDBaseT to HDMI

XVV-CC1xVision Converter Carrying case for 1 unit


XVV-CC2xVision Converter Carrying case for 2 units

XVV-CC3xVision Converter Carrying case for 3 units

XVV-VM-AxVision Converter Vertical Mount

MSCB-CSMega Slim coupler - black with countersunk

/theatrixx com

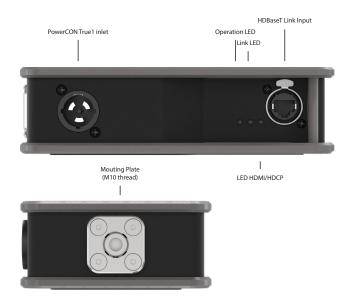



Connections

1 x HDBaseT 1.0 on shielded EtherCON Video Input

connector

Ethernet Port 1 x 1 Gbps Ethernet on Neutrik EtherCON

Video Output 1 x HDMI 1.4 type A with locking system

Recommended cable UTP CAT6a with EtherCON connectors

*Contact Theatrixx Technologies for more info

Supported Signals

Video Format Support HDMI 1.4 HDCP Compliance HDCP 1.4 **Ethernet Support** 100 Mpbs

Physical Specifications

Height 53 mm (2.09 in) 180 mm (7.08 in) Depth Width 107 mm (4.21 in) Weight 1 kg (2.2 lbs)

Alternate Form Factor Also available as a Reversible Module

Environmental Specifications

Relative Humidity 0% to 90% non-condensing

Operating Temperature 0-40 °C

Power Requirements

Power Supply Built-in power supply

PowerCON True1 input

PowerCON True1 output (loop-thru)

15W **Power Consumption**

100-240V, 50-60Hz Voltage Range

(100-120V, 50-60Hz available with PowerCON/

Edison Nema 5-15)

Courtesy Outlet Max 10A, same voltage as input

In the Box

xVision Converter HDBaseT to HDMI True1 Locking HDMI male to DVI male (1m) AC Mains PowerCON True1 cable (1.5m, specify plug type at ordering)

Certifications & Compliance

This device complies with the following international standards









